



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## VLM-520-52-Series

### OUTLINE DIMENSIONS (UNITS: mm)

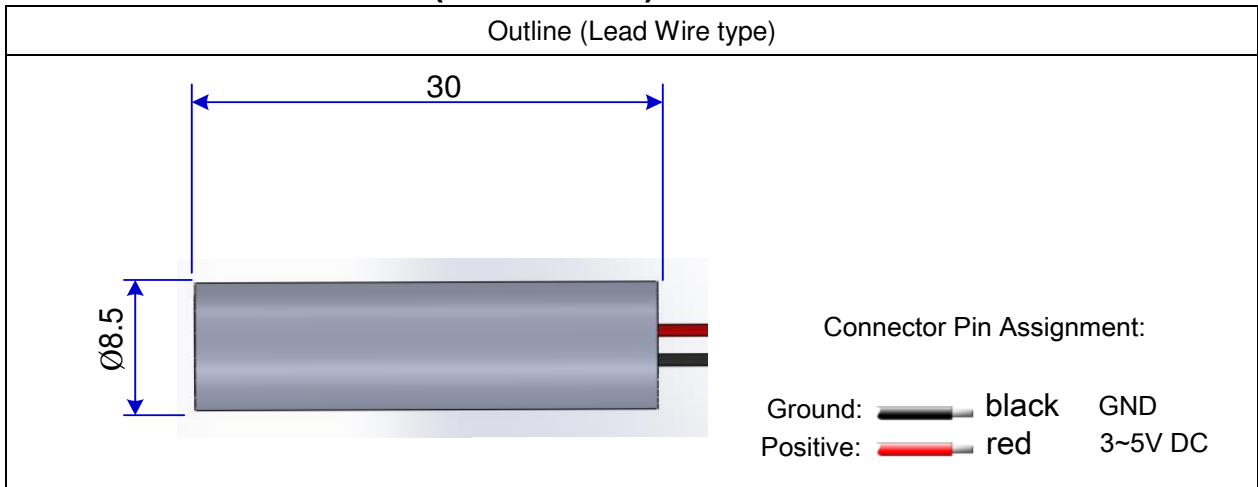

### SPECIFICATIONS

SPECIFICATIONS		VLM-520-52	
		LPT	LPA
1	Dimensions	Ø8.5 x 30 mm (Ø0.334" x 1.18")	
2	Weight	4.2g	
3	Operating voltage (Vop)	3~7 VDC	
4	Operating current (Iop)	<100mA	<100mA
5	Continuous wave output power (Po)	<1mW	<4mW
6	Wavelength at peak emission (λp)	510~530nm	
7	Collimating Lens	Aspherical Glass lens(Ø6.35)	
8	Output Aperture	5mm	
9	Beam Shape	Dot	
10	Spot size at 10M	5±1mm	
11	Divergence(Half Angle)	<0.4mRad	
12	Operating temp. range	-20°C ~ +60°C	
13	Storage temp. range	-20°C ~ +85°C	
14	Housing Material	Stainless steel	
15	Housing Color	Silver	
16	Potential of Housing	Insulated	
17	Wire Type	1007-26AWG	
18	Cable length	127mm	
19	Mean time to failure(MTTF) 25°C	10000hrs	

Note : Laser module housing is an electrical positive surface, it is imperative that contact between the laser module and the machine be avoided. This is to prevent damage from the machine electrical leakage. Surge protected power supply to the laser module is strongly recommended.