

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

VLM-520-55-Series

OUTLINE DIMENSIONS (UNITS: mm)

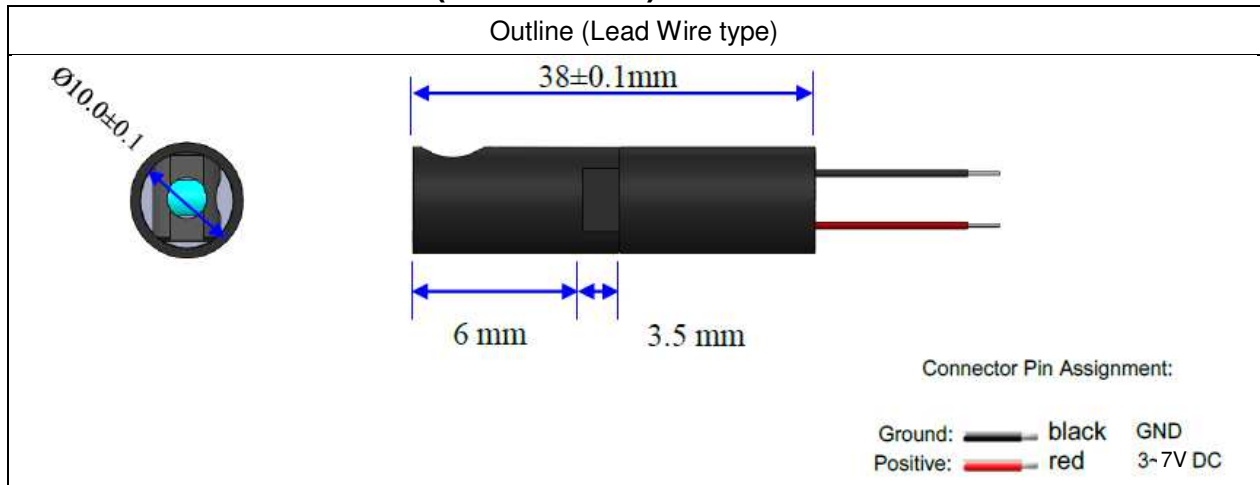

SPECIFICATIONS

SPECIFICATIONS		VLM-520-55	
		LPO	LPT
1	Dimensions	Ø 10.0 x 38 mm (Ø0.393" x 1.496")	
2	Weight	5.2g	
3	Operating Voltage (Vop)	3~7 VDC	
4	Operating Current (Iop)	<100mA	<100mA
5	Continuous Wave Output Power(Po)	<0.39mW	<0.9mW
6	Wavelength at Peak Emission(λ p)	510~530 nm	
7	Cylindrical Lens	Quartz cylindrical lens(Ø 3)	
8	Collimating Lens	Glass Lens(Ø 6)	
9	Beam Shape	Line	
10	Laser Line Width	3±0.5mm@5M, 6±0.5mm@10M	
11	Laser Line Accuracy	40"(±1mm@5M)	
12	Fan Angle	>90	
13	Operating Temp. Range	-20° C~+60° C	
14	Storage Temp. Range	-20° C~+85° C	
15	Housing Material	Aluminum	
16	Housing Color	Black	
17	Potential of Housing	Insulated	
18	Wire Type	1007-26AWG	
19	Cable Length	127mm	
20	Mean Time to Failure(MTTF)25° C	10000hrs	

Note : Laser module housing is an electrical positive surface, it is imperative that contact between the laser module and the machine be avoided. This is to prevent damage from the machine electrical leakage. Surge protected power supply to the laser module is strongly recommended.

@Copyright 2017 Quarton inc. All Rights Reserved.

www.quarton.com