



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Industrial 3D-Scan Line module VLM-650-30 Series



### FEATURES:


- Industrial 3D-Scan Red Line Laser.
- High contrast Gaussian line profile.
- Line thickness <math><1.2\text{mm}</math> ( $60^\circ$  type) at Working Range 50mm ~ 400mm.
- High Laser line accuracy : 4/1000(<math><1.6\text{mm}</math> @400mm).
- This module has integrated quartz cylindrical lens, collimating lens, laser diode, and APC driver circuit.
- Advanced APC circuit to provide maximum stable laser output power.
- Dimensions:  $\Phi 10 \times 27.1 \text{ mm}$  ( $\Phi 0.394" \times 1.067"$ )
- Wavelength : 650 nm
- Output power (Center/Total) : less than 1mW / 5~20mW
- Fan Angle :  $60^\circ$  or  $90^\circ$
- 5 V operation voltage.
- Connection type: Lead wire
- Built-in Laser Emissions indicator (LED)

### APPLICATIONS:

- Specifically optimized for Industrial 3D scanner.
- High accuracy Red Straight Line Laser, Line-width optimize at short distance (50~400mm), for Industrial high-precision barcode reader, leveling, alignment, adjusting, measuring and targeting device.
- Wood processing.
- Metal processing.
- Stone processing.
- Textile industry.
- Food industry.
- Automotive industry.
- Medical science

## VLM-650-30 Series

### OUTLINE DIMENSIONS (UNITS: mm)

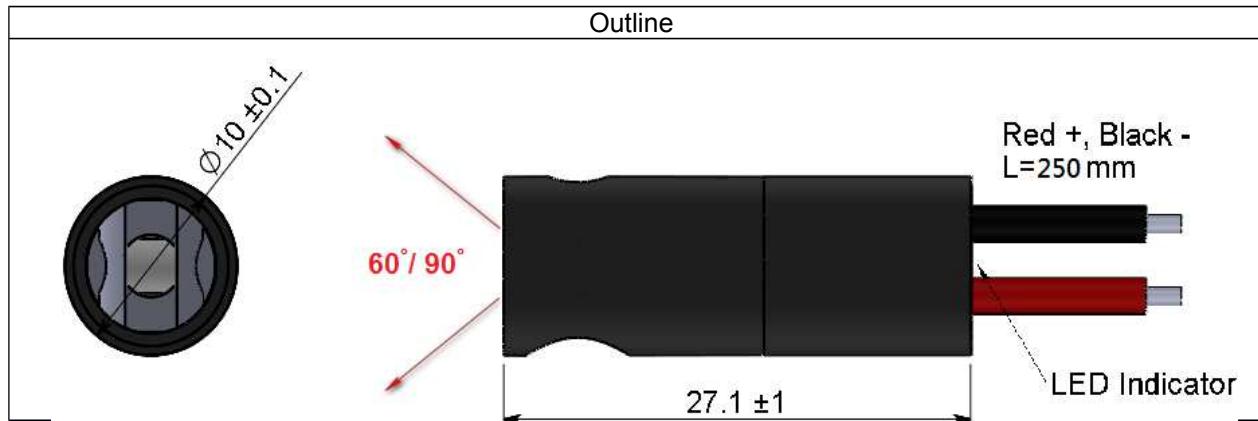

**SF**

Items		VLM-650-30 LPT10(60°)	VLM-650-30 LPT10(90°)	VLM-650-30 LPT30(60°)	VLM-650-30 LPT30(90°)
1	Dimensions	$\phi 10 \times 27.1 \pm 1 \text{ mm}$			
2	Housing Material	Aluminum with Black Anodized			
3	Exit Aperture Protection	Glass Window with AR Coating			
4	Lens Material	Aspherical Plastic + Glass (Rod lens)			
5	Emissions Indicator	Red LED Indicator			
6	Connection type	Lead Wires (L=250mm)			
7	Mode of operation	Auto Power Control (APC)			
8	Operating Voltage	5V			
9	Operating Current	40 mA		60 mA	
10	Modulation	Continuous wave (CW), Switching up to 1KHz			
11	Total Output power	5mW	5mW	20mW	20mW
12	Classification	Class 1M	Class 1M	Class 2M	Class 2M
13	Output power Stability(25°C)	Total Fluctuation <5%			
14	Output power VS. Temperature	< 0.5% / °C			
15	Wavelength (25°C)	$650 \pm 15 \text{ nm}$			
16	Wavelength Stability	$0.25 \sim 0.3 \text{ nm}/^\circ\text{C}$			
17	Fan Angle	60°	90°	60°	90°
18	Line Intensity profile	Gaussian Line			
19	Working Range	50mm~400mm			
20	Line thickness (13.5%)	<1.2mm	<1.5mm	<1.2mm	<1.5mm
21	Beam alignment	<3°			
22	Laser line accuracy	$4/1000 (<1.6 \text{ mm @} 400 \text{ mm})$			

Note : Laser module housing is an electrical positive surface, it is imperative that contact between the laser module and the machine be avoided. This is to prevent damage from the machine electrical leakage. Surge protected power supply to the laser module is strongly recommended.




## VLM-650-30 Series

### ORDER CODE

Parts Name	Order Code	Wavelength (nm)	Total Output power (mW)	Fan Angle	Working Range	Line thickness (13.5%)	Laser line accuracy	Emissions Indicator
VLM-650-30 LPT10(60°)	250-43002G	650 ±15	5	60°	50mm~400mm	<1.2mm	4/1000	Red LED
VLM-650-30 LPT10(90°)	250-43003G	650 ±15	5	90°	50mm~400mm	<1.5mm	4/1000	Red LED
VLM-650-30 LPT30(60°)	250-43001G	650 ±15	20	60°	50mm~400mm	<1.2mm	4/1000	Red LED
VLM-650-30 LPT30(90°)	250-43004G	650 ±15	20	90°	50mm~400mm	<1.5mm	4/1000	Red LED

## Annex A.

### Laser Line Accuracy

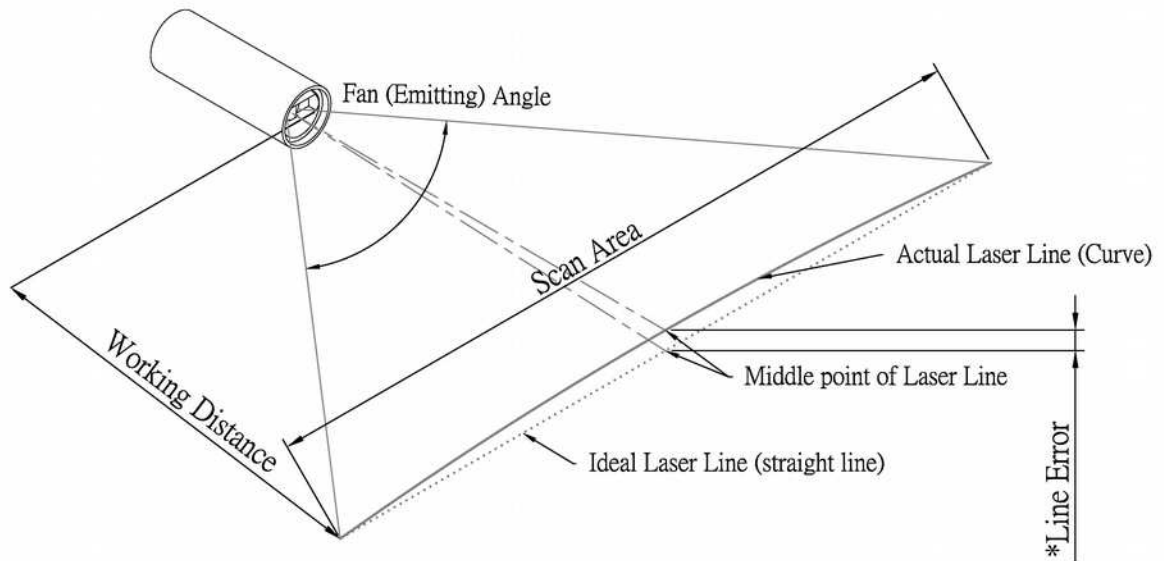

$$*\text{Laser Line Accuracy} = \frac{\text{Line Error at middle point}}{\text{Scan Area}}$$

For VLM-650-30 Series, Laser line accuracy  $< \frac{4}{1000}$

For VLM-650-41 Series, Laser line accuracy  $< \frac{1}{100}$