

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









PolySwitch® PTC Devices

Overcurrent Protection Device

PRODUCT: VLR170F

DOCUMENT: SCD26025 PCN: D91020

REV LETTER: C REV DATE: JULY 26, 2016

PAGE NO.: 1 OF 2

Specification Status: Released

Maximum Electrical Rating Operating Voltage: 12Vdc Interrupt Current: 100A

Chip Size: 3.6 X 10mm

Leads: Nickel 1/4H

0.125mm nominal thickness

Tape: Polyester (White)

11.0 mm nominal width

Solder: Lead-free

Lot Marking Ink Color: Green



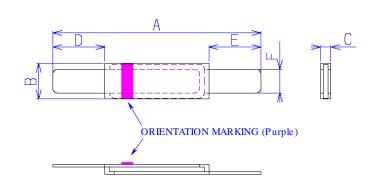


TABLE I. DIMENSIONS:

	Α		В		С		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	20.8	23.2	3.5	3.9		0.8	4.5	6.5	4.5	6.5	2.4	2.6
in*:	(0.82)	(0.91)	(0.14)	(0.15)		(0.03)	(0.18)	(0.26)	(0.18)	(0.26)	(0.09)	(0.10)

^{*}Rounded off approximation

TABLE II. PERFORMANCE RATINGS: As measured in Mueller Kelvin Clips model BU-75K.

I HOL	D		CURF	RENT	TRIP LI	MITS		TIME	TO	REFERENC ONE-HOUR			TRIPPED-			
								TRIP		E	POST-TRIP		STATE			
										RESIS	STANC	-				
									E					DISSIPATION		
AMPS	S AN	AMPS		AMPS AMPS		IPS	AMPS		SECONDS		OHMS		OHMS		WATTS AT	
25°C	C AT 0°C		AT 2	5°C	AT 60°C		AT°C		AT 25°C, 8.5A		AT 25°C		AT 25°C		25°C, 12V	
HOLE	HOLD	HOLD TRIP		TRIP	HOLD TRIP		HOLD	HOLD TRIP		MAX	MIN	MAX	MIN	MAX	MA	λX
1.7	2.4	5.6	1.7	4.1	0.7	1.9				5	0.018	0.032	0.018	0.064		1.4

Agency Recognitions: UL, TUV, CSA Reference Documents: PS300

Precedence: This specification takes precedence over documents referenced herein.

Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.

CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information:

ROHS Compliant

Directive 2002/95/EC Compliant **ELV Compliant**

Directive 2000/53/EC Compliant Pb-Free





PolySwitch® PTC Devices

Overcurrent Protection Device

PRODUCT: VLR170F

DOCUMENT: SCD26025 PCN: D91020 REV LETTER: C

REV DATE: JULY 26, 2016

PAGE NO.: 2 OF 2