



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# VLS2520XX-HBU-KIT Power Inductor Sample Kit

## Wire Wound Inductors for Power Circuit Applications

TDK's VLS2520XX-HBU series power inductors are magnetically shielded, wire-wound inductors with a metallic magnetic core material. The core material of the VLS-HBU series has been improved, resulting in a higher rated current specification than previous VLS series product. This series achieves high withstanding voltage (40V) due to the insulating technology of its metallic core material. VLS-HBU inductors are designed for use in power circuit applications including LCD LED backlight, LCD panel, OLED panel, and LCD driver applications.




- Metal Core
- Wire Wound
- Shielded




### Features

- Magnetically shielded, wire wound inductor
- Large current was achieved through use of a metallic magnetic core material
- High withstand voltage (40V) was achieved by insulating technology of metallic material
- Operating and storage temperature range of -40 to +105°C

**VLS252010HBU Series**

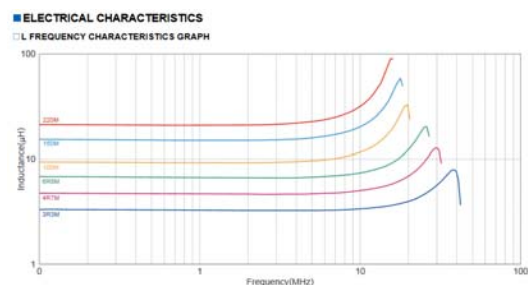

**VLS252012HBU Series**

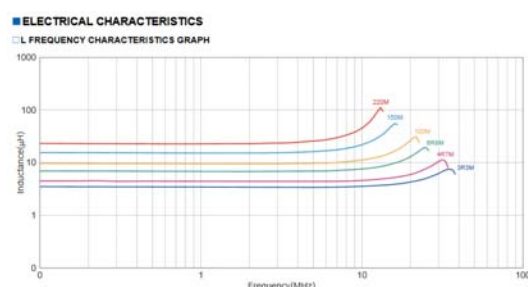

### Applications

- LCD LED Backlight
- LCD Panel
- OLED Panel

### Sample Kit Information

Series	Size [mm]	Thickness [mm]	Inductance [µH] ±20%	DC Resistance [Ω] Max.	Saturation Current [A] Max.
<a href="#">VLS252010HBU</a>	2.5 x 2.0	1.0	3.3 to 22µH	0.270 to 2.004	2.00 to 0.75
<a href="#">VLS252012HBU</a>		1.2		0.216 to 1.680	2.36 to 0.86

Kit contains 120 pieces total—10 pieces each of 12 values

Digi-Key Part Number: [445-175081-KIT-ND](#)



# VLS2520XX-HBU-KIT Power Inductor Sample Kit

## Wire Wound Inductors for Power Circuit Applications



Digi-Key Part Number	TDK Part Number	Part Number Description
445-175081-KIT-ND	VLS252010HBU-3R3M	2520, t=1.0mm, Inductor, 3.3uH, 20%
	VLS252010HBU-4R7M	2520, t=1.0mm, Inductor, 4.7uH, 20%
	VLS252010HBU-6R8M	2520, t=1.0mm, Inductor, 6.8uH, 20%
	VLS252010HBU-100M	2520, t=1.0mm, Inductor, 10uH, 20%
	VLS252010HBU-150M	2520, t=1.0mm, Inductor, 15uH, 20%
	VLS252010HBU-220M	2520, t=1.0mm, Inductor, 22uH, 20%
	VLS252012HBU-3R3M	2520, t=1.2mm, Inductor, 3.3uH, 20%
	VLS252012HBU-4R7M	2520, t=1.2mm, Inductor, 4.7uH, 20%
	VLS252012HBU-6R8M	2520, t=1.2mm, Inductor, 6.8uH, 20%
	VLS252012HBU-100M	2520, t=1.2mm, Inductor, 10uH, 20%
	VLS252012HBU-150M	2520, t=1.2mm, Inductor, 15uH, 20%
	VLS252012HBU-220M	2520, t=1.2mm, Inductor, 22uH, 20%