



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

## Features

|                                   |              |      |
|-----------------------------------|--------------|------|
| Max on-state resistance (per ch.) | $R_{DS(on)}$ | 0.3Ω |
| Current limitation (typ)          | $I_{lim}$    | 10A  |
| Drain-Source clamp voltage        | $V_{CLAMP}$  | 60V  |

- Linear current limitation
- Thermal shutdown
- Short circuit protection
- Integrated clamp
- Low current drawn from input pin
- Logic level input threshold
- ESD protection
- Schmitt trigger on input
- High noise immunity

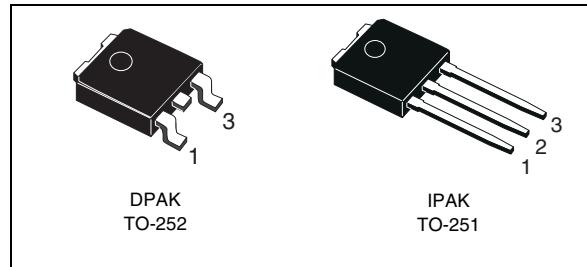

## Description

The VND10N06 and VND10N06-1 are monolithic devices designed in STMicroelectronics VIPower M0-2 technology, intended for replacement of standard Power MOSFETs in DC to 50KHz applications. Built in thermal shutdown, linear current limitation and overvoltage clamp protect the chip in harsh environments.

**Table 1. Device summary**

| Package | Order codes |               |
|---------|-------------|---------------|
|         | Tube        | Tape and reel |
| DPAK    | VND10N06    | VND10N06TR    |
| IPAK    | VND10N06-1  |               |

## Contents

|          |                                          |           |
|----------|------------------------------------------|-----------|
| <b>1</b> | <b>Block diagram and pin description</b> | <b>5</b>  |
| <b>2</b> | <b>Electrical specifications</b>         | <b>6</b>  |
| 2.1      | Absolute maximum ratings                 | 6         |
| 2.2      | Thermal data                             | 6         |
| 2.3      | Electrical characteristics               | 7         |
| 2.4      | Electrical characteristics curves        | 12        |
| <b>3</b> | <b>Protection features</b>               | <b>16</b> |
| <b>4</b> | <b>Thermal data</b>                      | <b>17</b> |
| <b>5</b> | <b>Package and packing information</b>   | <b>18</b> |
| 5.1      | ECOPACK® packages                        | 18        |
| 5.2      | DPAK mechanical data                     | 18        |
| 5.3      | IPAK mechanical data                     | 20        |
| 5.4      | DPAK packing information                 | 21        |
| 5.5      | IPAK packing information                 | 23        |
| <b>6</b> | <b>Revision history</b>                  | <b>24</b> |

## List of tables


|           |                                                                    |    |
|-----------|--------------------------------------------------------------------|----|
| Table 1.  | Device summary .....                                               | 1  |
| Table 2.  | Absolute maximum ratings .....                                     | 6  |
| Table 3.  | Thermal data.....                                                  | 6  |
| Table 4.  | Off.....                                                           | 7  |
| Table 5.  | Switching .....                                                    | 7  |
| Table 6.  | On.....                                                            | 7  |
| Table 7.  | Dynamic .....                                                      | 8  |
| Table 8.  | Source Drain diode.....                                            | 8  |
| Table 9.  | Protections (-40°C < Tj < 150°C, unless otherwise specified) ..... | 8  |
| Table 10. | DPAK mechanical data.....                                          | 19 |
| Table 11. | IPAK mechanical data .....                                         | 20 |
| Table 12. | Document revision history .....                                    | 24 |

## List of figures

|            |                                                                         |    |
|------------|-------------------------------------------------------------------------|----|
| Figure 1.  | Block diagram .....                                                     | 5  |
| Figure 2.  | Switching waveforms .....                                               | 8  |
| Figure 3.  | Switching time test circuit for resistive load .....                    | 9  |
| Figure 4.  | Test circuit for inductive load switching and diode recovery time ..... | 9  |
| Figure 5.  | Unclamped inductive load test circuits .....                            | 10 |
| Figure 6.  | Input charge test circuit. ....                                         | 10 |
| Figure 7.  | Unclamped inductive waveforms .....                                     | 11 |
| Figure 8.  | Static Drain-Source on resistance ( $V_{IN} = 3.5V$ ) .....             | 12 |
| Figure 9.  | Static Drain-Source on resistance ( $V_{IN} = 5V$ ) .....               | 12 |
| Figure 10. | Derating curve .....                                                    | 12 |
| Figure 11. | Static Drain-Source on resistance vs. input voltage .....               | 12 |
| Figure 12. | Current limit Vs. junction temperature .....                            | 12 |
| Figure 13. | Source-Drain diode voltage Vs. junction temperature .....               | 12 |
| Figure 14. | Step response current limit .....                                       | 13 |
| Figure 15. | Switching time resistive load .....                                     | 13 |
| Figure 16. | Turn-on current slope ( $V_{IN} = 3.5V$ ) .....                         | 13 |
| Figure 17. | Turn-on current slope ( $V_{IN} = 7V$ ) .....                           | 13 |
| Figure 18. | Input voltage Vs. input charge .....                                    | 13 |
| Figure 19. | Turn-off Drain-Source voltage slope .....                               | 13 |
| Figure 20. | Turn-off Drain-Source voltage slope .....                               | 14 |
| Figure 21. | Capacitance variations .....                                            | 14 |
| Figure 22. | Switching time resistive load .....                                     | 14 |
| Figure 23. | Normalized on resistance Vs. temperature ( $V_{IN} = 7V$ ) .....        | 14 |
| Figure 24. | Output characteristics .....                                            | 14 |
| Figure 25. | Normalized on resistance Vs. temperature ( $V_{IN} = 3.5V$ ) .....      | 14 |
| Figure 26. | Normalized input threshold voltage Vs. temperature .....                | 15 |
| Figure 27. | Thermal impedance for DPAK / IPAK .....                                 | 17 |
| Figure 28. | DPAK package dimensions .....                                           | 18 |
| Figure 29. | IPAK mechanical data and package outline .....                          | 20 |
| Figure 30. | DPAK footprint .....                                                    | 21 |
| Figure 31. | DPAK tube shipment (no suffix) .....                                    | 21 |
| Figure 32. | DPAK tape and reel shipment (suffix "TR") .....                         | 22 |
| Figure 33. | IPAK tube shipment (no suffix) .....                                    | 23 |

# 1 Block diagram and pin description

Figure 1. Block diagram

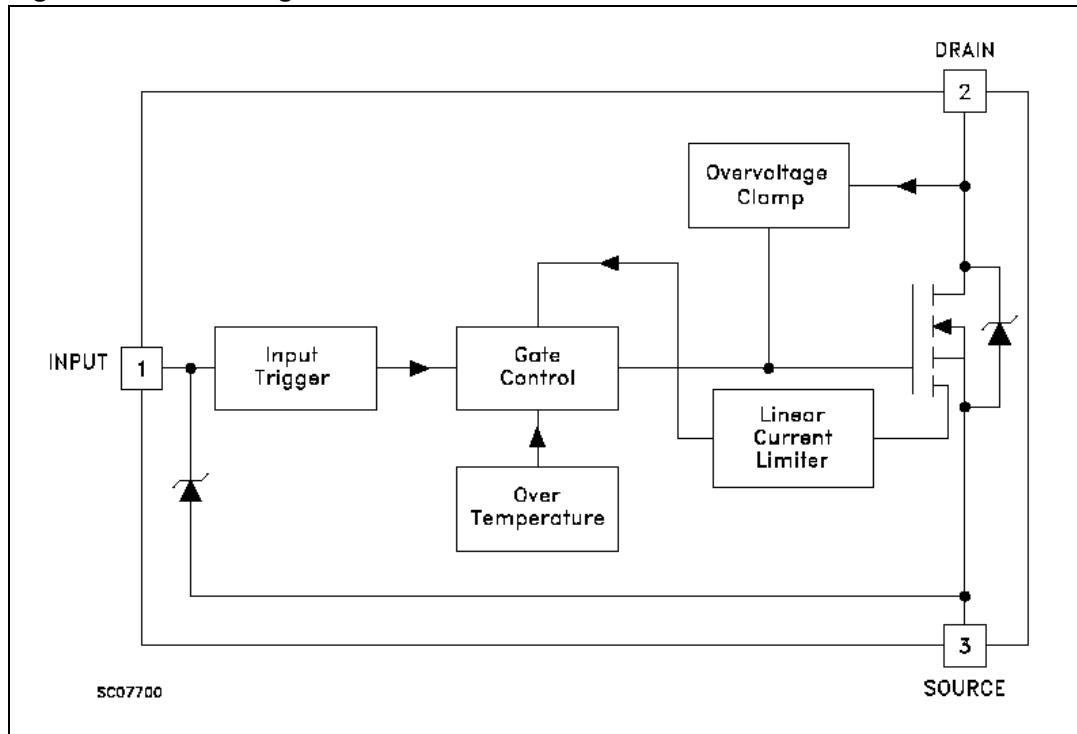

## 2 Electrical specifications

### 2.1 Absolute maximum ratings

Stressing the device above the rating listed in the “Absolute maximum ratings” table may cause permanent damage to the device. These are stress ratings only and operation of the device at these or any other conditions above those indicated in the operating sections of this specification is not implied. Exposure to Absolute maximum rating conditions for extended periods may affect device reliability. Refer also to the STMicroelectronics SURE program and other relevant quality document.

**Table 2. Absolute maximum ratings**

| Symbol    | Parameter                                                   | Value              | Unit       |
|-----------|-------------------------------------------------------------|--------------------|------------|
| $V_{DSn}$ | Drain-Source voltage ( $V_{in} = 0V$ )                      | Internally clamped | V          |
| $V_{INn}$ | Input voltage                                               | Internally clamped | V          |
| $I_{in}$  | Input current                                               | $\pm 20$           | mA         |
| $I_{Dn}$  | Drain current                                               | Internally limited | A          |
| $I_{Rn}$  | Reverse DC output current                                   | - 15               | A          |
| $V_{ESD}$ | Electrostatic discharge<br>( $R = 1.5K\Omega$ $C = 100pF$ ) | 4000               | V          |
| $P_{tot}$ | Total dissipation at $T_c = 25^\circ C$                     | 35                 | W          |
| $T_j$     | Operating junction temperature                              | Internally limited | $^\circ C$ |
| $T_c$     | Case operating temperature                                  | Internally limited | $^\circ C$ |
| $T_{stg}$ | Storage temperature                                         | - 55 to 150        | $^\circ C$ |

### 2.2 Thermal data

**Table 3. Thermal data**

| Symbol         | Parameter                           | Max. value | Unit         |
|----------------|-------------------------------------|------------|--------------|
| $R_{thj-case}$ | Thermal resistance junction-case    | 3.5        | $^\circ C/W$ |
| $R_{thj-amb}$  | Thermal resistance junction-ambient | 100        | $^\circ C/W$ |

## 2.3 Electrical characteristics

T<sub>case</sub> = 25 °C unless otherwise stated.

**Table 4. Off**

| Symbol             | Parameter                                               | Test conditions                                                                                                     | Min.    | Typ. | Max.       | Unit     |
|--------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------|---------|------|------------|----------|
| V <sub>CLAMP</sub> | Drain-Source clamp voltage                              | V <sub>IN</sub> = 0V; I <sub>D</sub> = 200mA                                                                        | 50      | 60   | 70         | V        |
| V <sub>IL</sub>    | Input low level voltage                                 | I <sub>D</sub> = 100 μA; V <sub>DS</sub> = 16 V                                                                     |         |      | 1.5        | V        |
| V <sub>IH</sub>    | Input high Level voltage                                | R <sub>L</sub> = 27Ω; V <sub>DD</sub> = 16 V<br>V <sub>DS</sub> = 0.5 V                                             | 3.2     |      |            | V        |
| I <sub>ISS</sub>   | Supply current from input pin                           | V <sub>DS</sub> = 0V; V <sub>IN</sub> = 5V                                                                          |         | 150  | 300        | μA       |
| V <sub>INCL</sub>  | Input-Source reverse clamp voltage                      | I <sub>IN</sub> = -1mA<br>I <sub>IN</sub> = 1mA                                                                     | -1<br>8 |      | -0.3<br>11 | V<br>V   |
| I <sub>DSS</sub>   | Zero input voltage drain current (V <sub>IN</sub> = 0V) | V <sub>DS</sub> = 50V; V <sub>IN</sub> = V <sub>IL</sub> ; V <sub>DS</sub> < 35V; V <sub>IN</sub> = V <sub>IL</sub> |         |      | 250<br>100 | μA<br>μA |

**Table 5. Switching<sup>(1)</sup>**

| Symbol                | Parameter             | Test conditions                                                                                                         | Min. | Typ. | Max. | Unit |
|-----------------------|-----------------------|-------------------------------------------------------------------------------------------------------------------------|------|------|------|------|
| t <sub>d(on)</sub>    | Turn-on delay time    | V <sub>DD</sub> = 16V; I <sub>D</sub> = 1A<br>V <sub>gen</sub> = 7V; R <sub>gen</sub> = 10Ω<br>(see <i>Figure 2</i> )   |      | 1100 | 1600 | ns   |
| t <sub>r</sub>        | Rise time             |                                                                                                                         |      | 550  | 900  | ns   |
| t <sub>d(off)</sub>   | Turn-off delay time   |                                                                                                                         |      | 200  | 400  | ns   |
| t <sub>f</sub>        | Fall time             |                                                                                                                         |      | 100  | 200  | ns   |
| t <sub>d(on)</sub>    | Turn-on delay time    | V <sub>DD</sub> = 16V; I <sub>D</sub> = 1A<br>V <sub>gen</sub> = 7V; R <sub>gen</sub> = 1000Ω<br>(see <i>Figure 2</i> ) |      | 1.2  | 1.8  | μs   |
| t <sub>r</sub>        | Rise time             |                                                                                                                         |      | 1    | 1.5  | μs   |
| t <sub>d(off)</sub>   | Turn-off delay time   |                                                                                                                         |      | 1.6  | 2.3  | μs   |
| t <sub>f</sub>        | Fall time             |                                                                                                                         |      | 1.2  | 1.8  | μs   |
| (di/dt) <sub>on</sub> | Turn-on current slope | V <sub>DD</sub> = 16V; I <sub>D</sub> = 1A<br>V <sub>in</sub> = 7V; R <sub>gen</sub> = 10Ω                              |      | 1.5  |      | A/μs |
| Q <sub>i</sub>        | Total input charge    | V <sub>DD</sub> = 12V; I <sub>D</sub> = 1A; V <sub>IN</sub> = 7V                                                        |      | 13   |      | nC   |

1. Parameters guaranteed by design / characterization.

**Table 6. On<sup>(1)</sup>**

| Symbol              | Parameter                         | Test conditions                                                     | Min. | Typ. | Max. | Unit |
|---------------------|-----------------------------------|---------------------------------------------------------------------|------|------|------|------|
| R <sub>DS(on)</sub> | Static Drain-Source on resistance | V <sub>IN</sub> = 7V; I <sub>D</sub> = 1 A; T <sub>j</sub> < 125 °C |      | 0.15 | 0.3  | Ω    |

1. Pulsed: pulse duration = 300μs, duty cycle 1.5%.

**Table 7. Dynamic**

| Symbol    | Parameter          | Test conditions                       | Min. | Typ. | Max. | Unit |
|-----------|--------------------|---------------------------------------|------|------|------|------|
| $C_{OSS}$ | Output capacitance | $V_{DS} = 13V; f = 1MHz; V_{IN} = 0V$ |      | 350  | 500  | pF   |

**Table 8. Source Drain diode**

| Symbol          | Parameter                | Test conditions                                                                                           | Min. | Typ. | Max. | Unit    |
|-----------------|--------------------------|-----------------------------------------------------------------------------------------------------------|------|------|------|---------|
| $V_{SD}^{(1)}$  | Forward on voltage       | $I_{SD} = 1 A; V_{IN} = V_{IL}$                                                                           |      | 0.8  | 1.6  | V       |
| $t_{rr}^{(2)}$  | Reverse recovery time    |                                                                                                           |      | 125  |      | ns      |
| $Q_{rr}^{(2)}$  | Reverse recovery charge  | $I_{SD} = 1A; di/dt = 100 A/\mu s$<br>$V_{DD} = 30V; T_j = 25^\circ C$<br>(see <a href="#">Figure 4</a> ) |      | 0.22 |      | $\mu C$ |
| $I_{RRM}^{(2)}$ | Reverse recovery current |                                                                                                           |      | 3.5  |      | A       |


1. Pulsed: pulse duration = 300 $\mu$ s, duty cycle 1.5%.



2. Parameters guaranteed by design / characterization.



**Table 9. Protections (-40°C <  $T_j$  < 150°C, unless otherwise specified)**


| Symbol           | Parameter                     | Test conditions                                                                         | Min. | Typ. | Max. | Unit       |
|------------------|-------------------------------|-----------------------------------------------------------------------------------------|------|------|------|------------|
| $I_{lim}$        | Drain current limit           | $V_{IN} = 7V; V_{DS}=13V$                                                               | 6    | 10   | 15   | A          |
| $t_{dlim}^{(1)}$ | Step response current limit   | $V_{IN} = 7 V; V_{DS}$ step from 0 to 13V                                               |      | 12   | 20   | $\mu s$    |
| $T_{jsh}^{(1)}$  | Overttemperature shutdown     |                                                                                         | 150  |      |      | $^\circ C$ |
| $T_{jrs}^{(1)}$  | Overttemperature reset        |                                                                                         | 135  |      |      | $^\circ C$ |
| $E_{as}^{(1)}$   | Single pulse avalanche energy | Starting $T_j = 25^\circ C; V_{DD} = 24V$<br>$V_{IN} = 7V R_{gen} = 1k\Omega; L = 10mH$ | 250  |      |      | mJ         |

1. Parameters guaranteed by design / characterization.

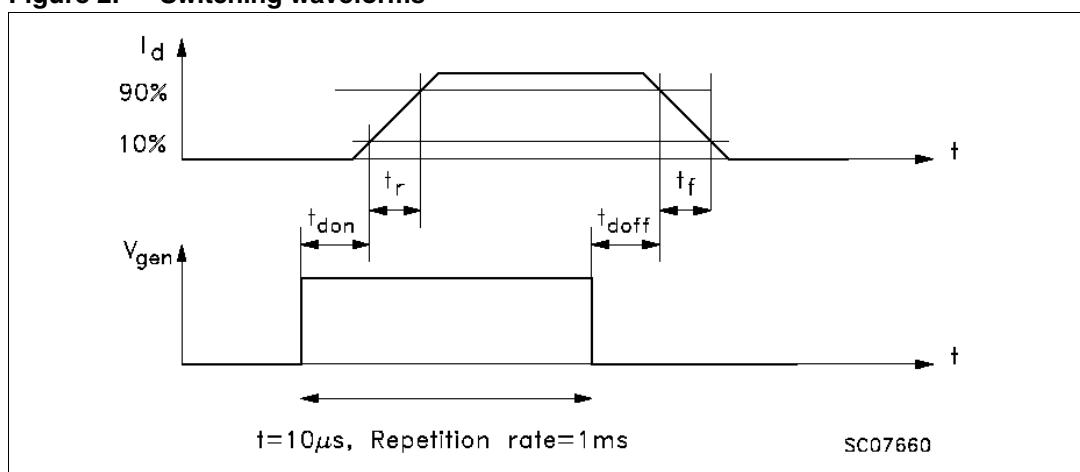**Figure 2. Switching waveforms**

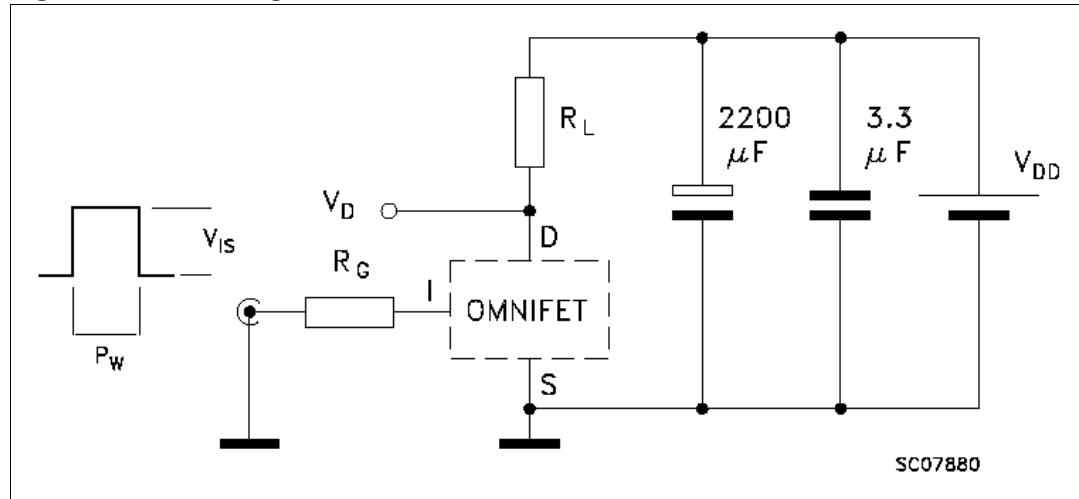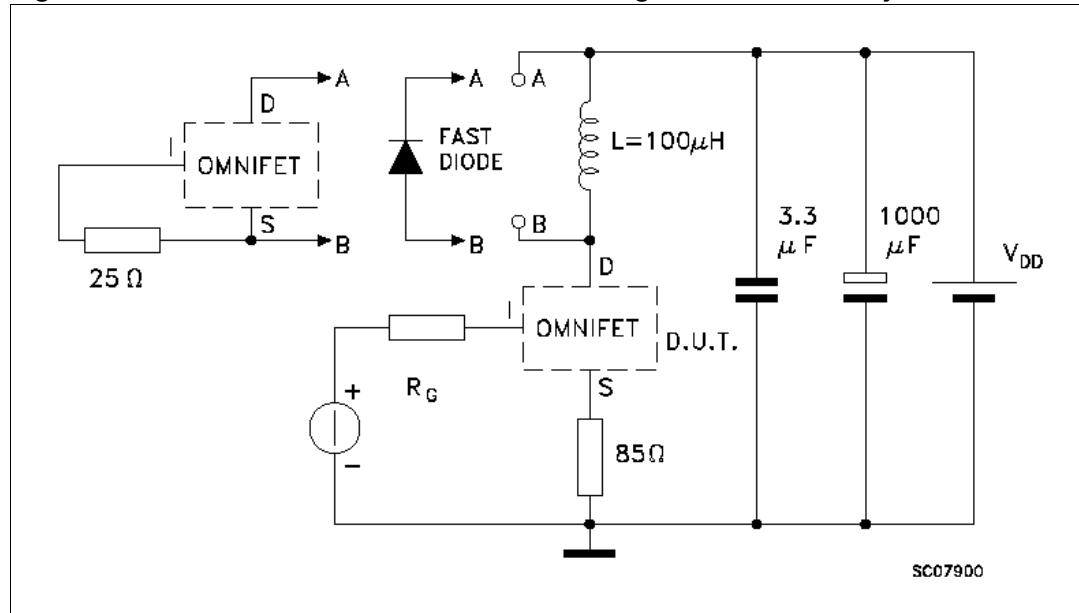
**Figure 3.** Switching time test circuit for resistive load**Figure 4.** Test circuit for inductive load switching and diode recovery time

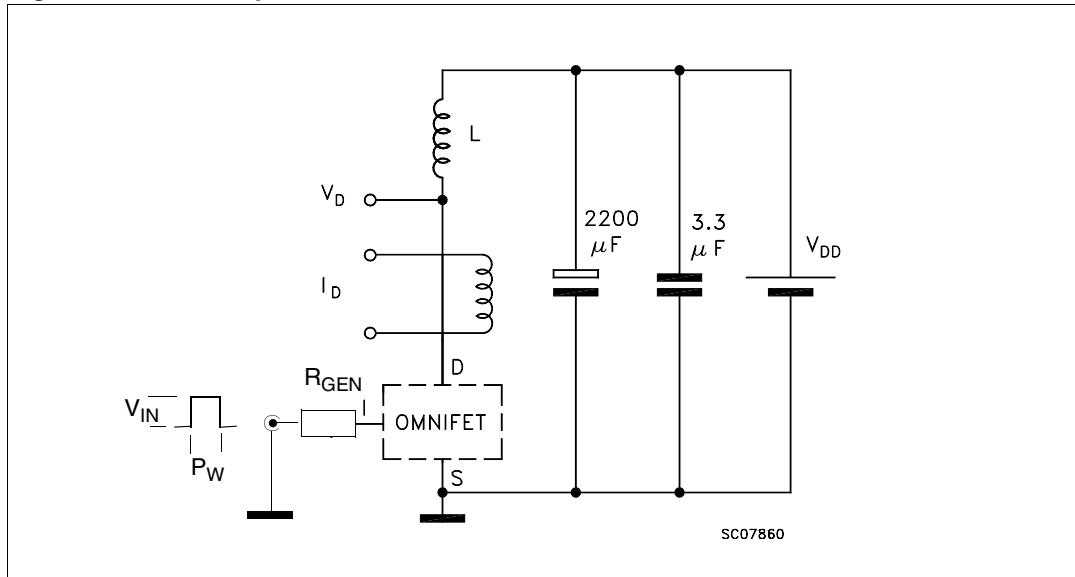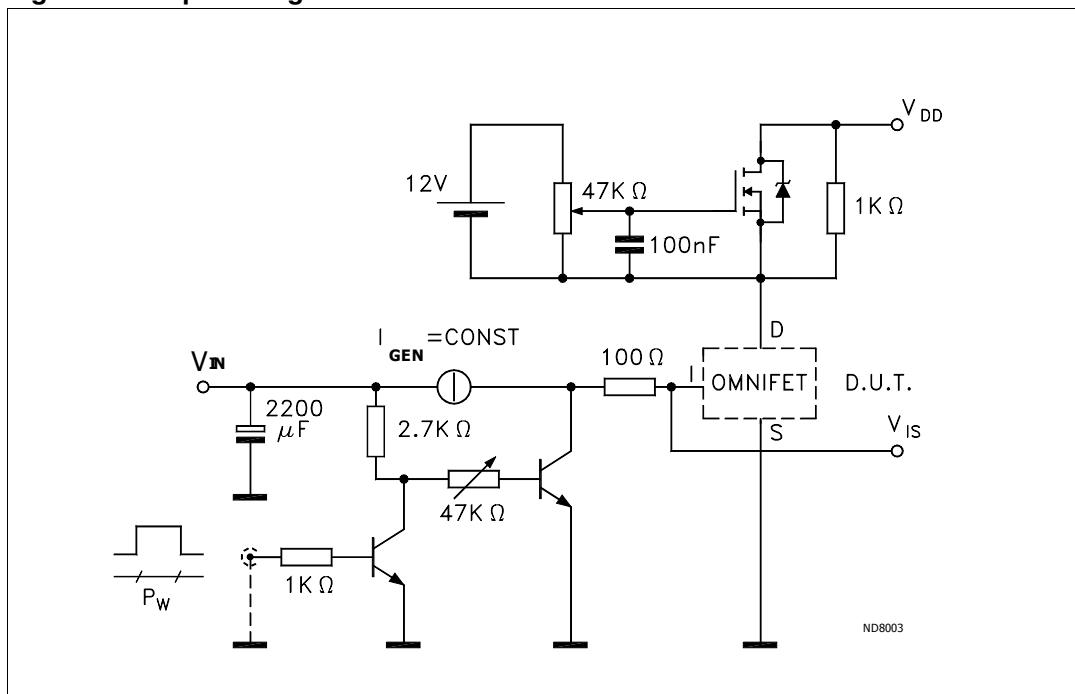**Figure 5. Unclamped inductive load test circuits****Figure 6. Input charge test circuit**

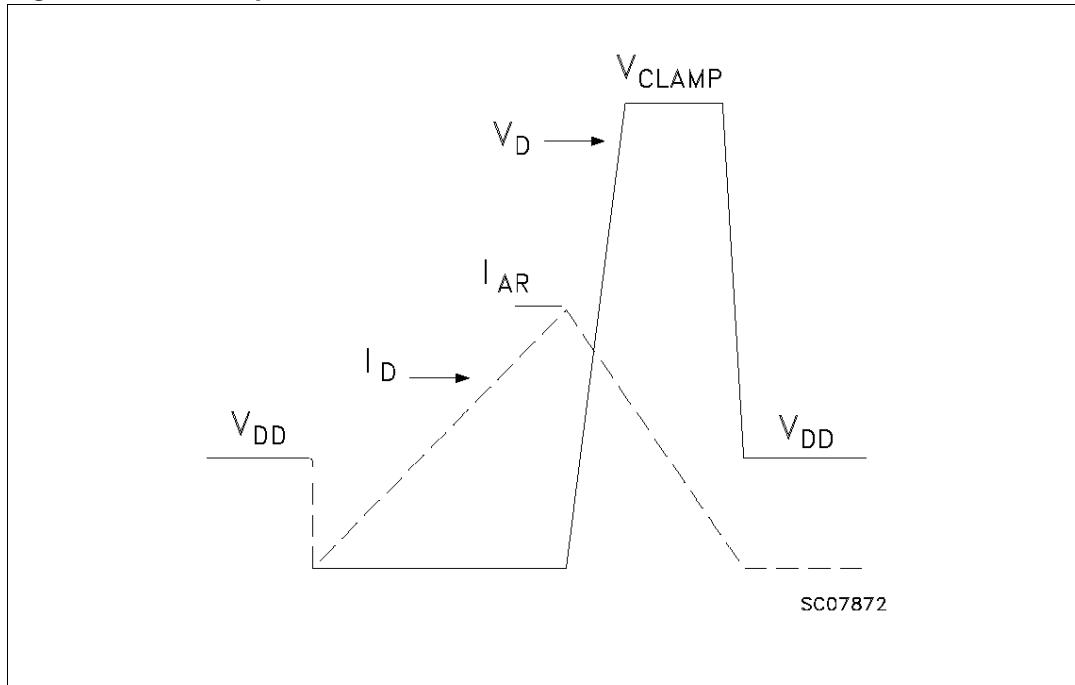
**Figure 7. Unclamped inductive waveforms**

## 2.4 Electrical characteristics curves


**Figure 8. Static Drain-Source on resistance ( $V_{IN} = 3.5V$ )**

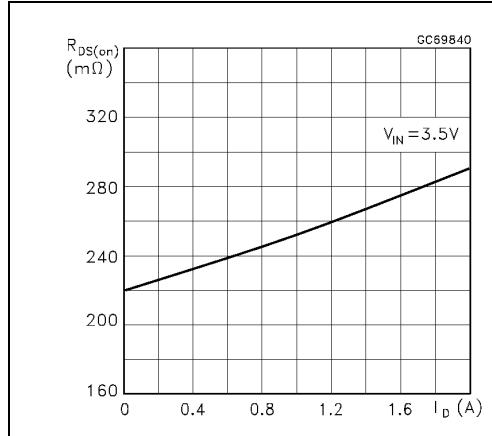


**Figure 9. Static Drain-Source on resistance ( $V_{IN} = 5V$ )**

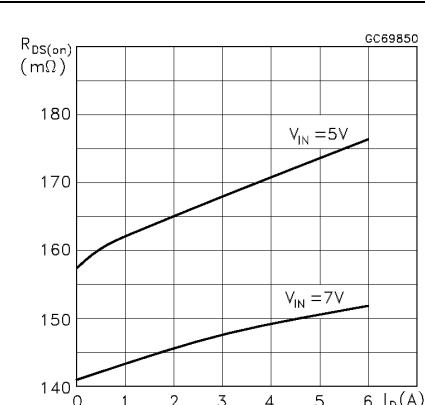


**Figure 10. Derating curve**

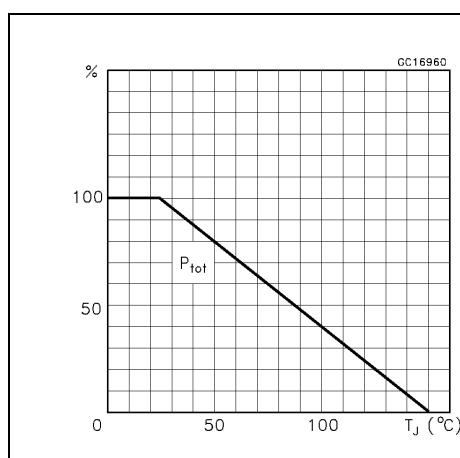


**Figure 11. Static Drain-Source on resistance vs. input voltage**






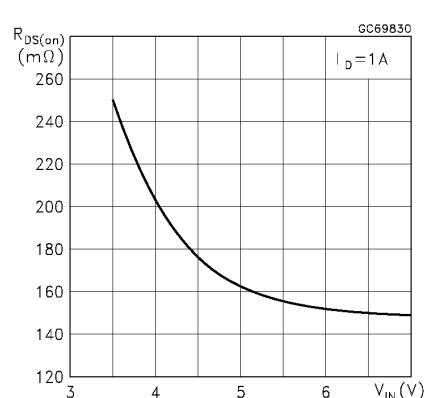


**Figure 12. Current limit Vs. junction temperature**


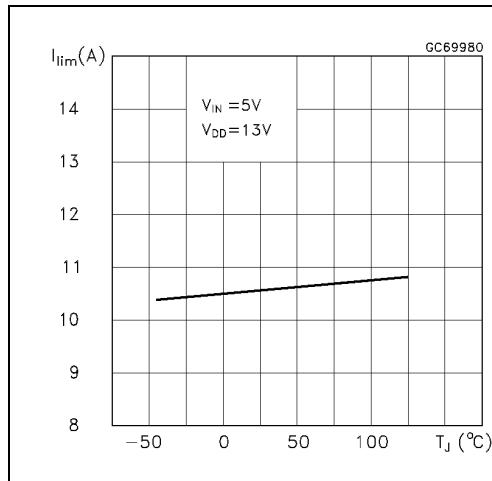


**Figure 13. Source-Drain diode voltage Vs. junction temperature**

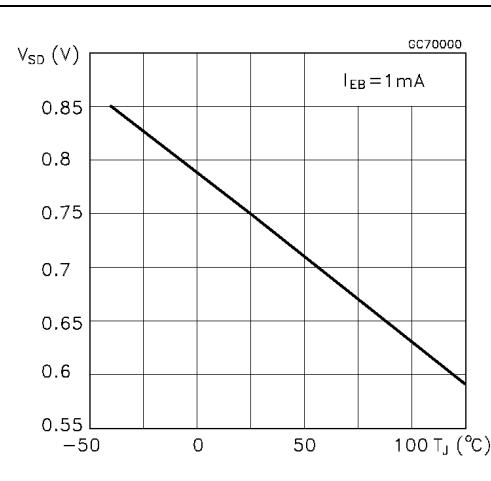

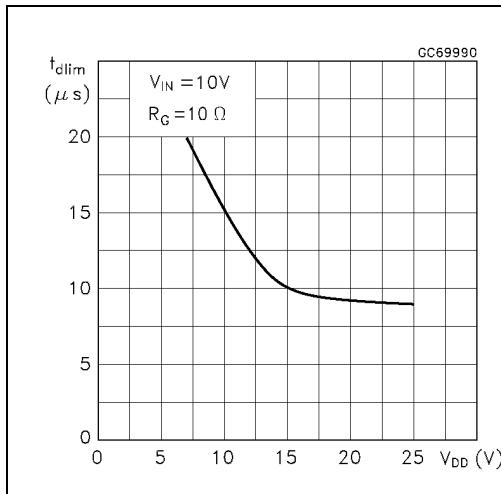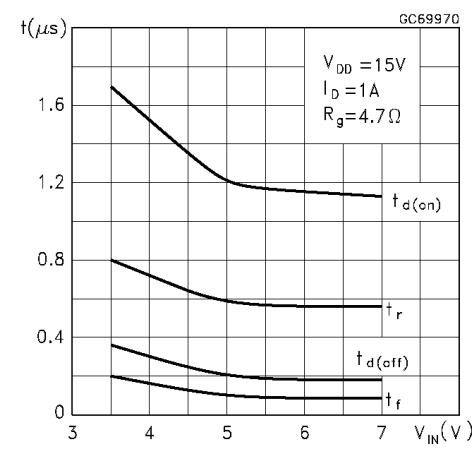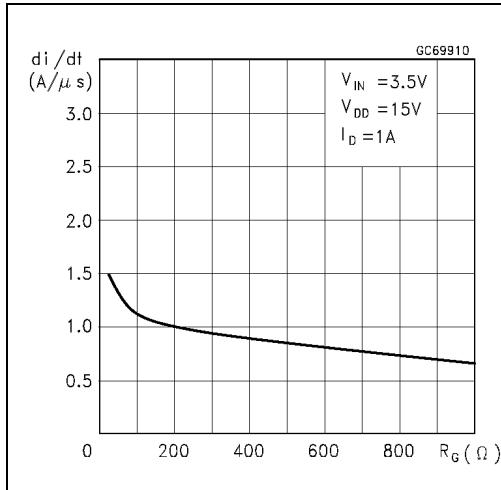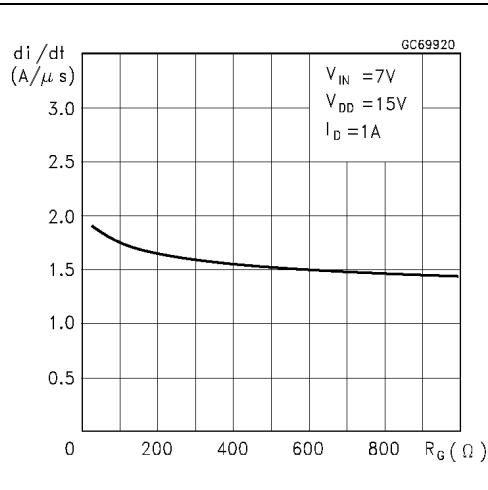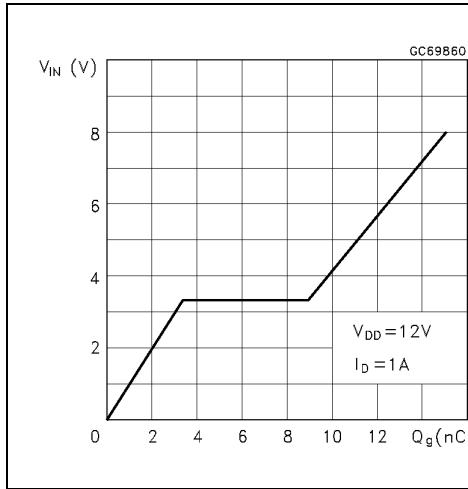
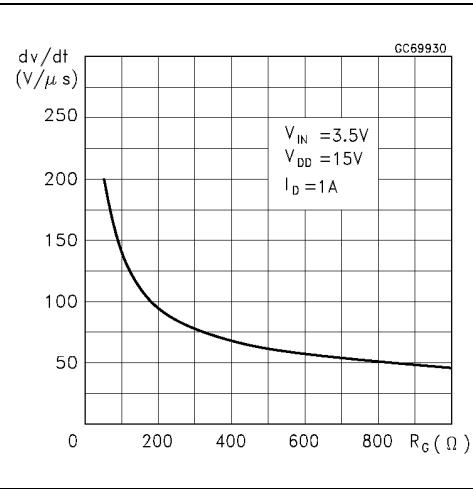
**Figure 14. Step response current limit****Figure 15. Switching time resistive load****Figure 16. Turn-on current slope ( $V_{IN} = 3.5V$ )****Figure 17. Turn-on current slope ( $V_{IN} = 7V$ )****Figure 18. Input voltage Vs. input charge****Figure 19. Turn-off Drain-Source voltage slope**

**Figure 20. Turn-off Drain-Source voltage slope**

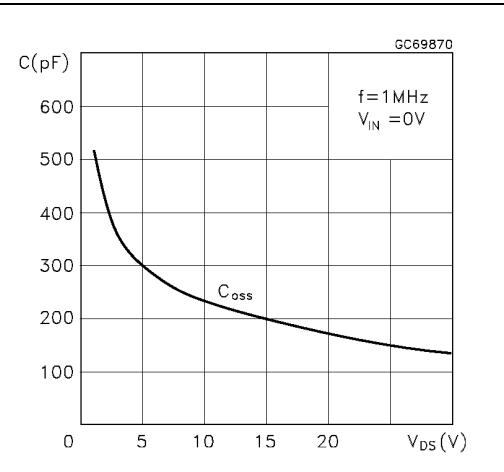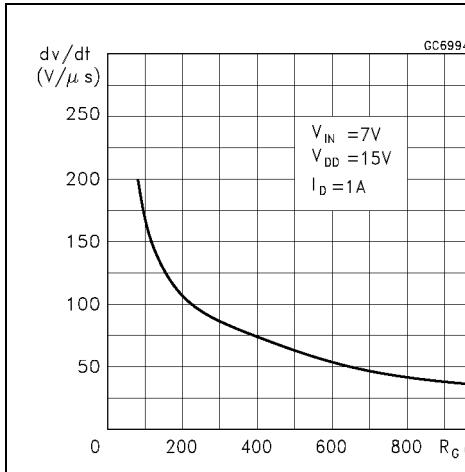



**Figure 22. Switching time resistive load**

**Figure 23. Normalized on resistance Vs. temperature ( $V_{IN} = 7V$ )**

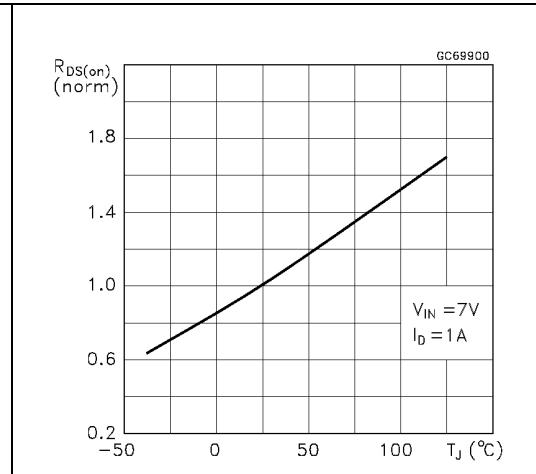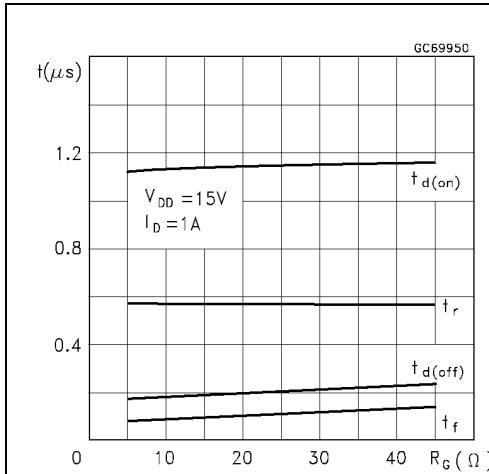


**Figure 24. Output characteristics**

**Figure 25. Normalized on resistance Vs. temperature ( $V_{IN} = 3.5V$ )**

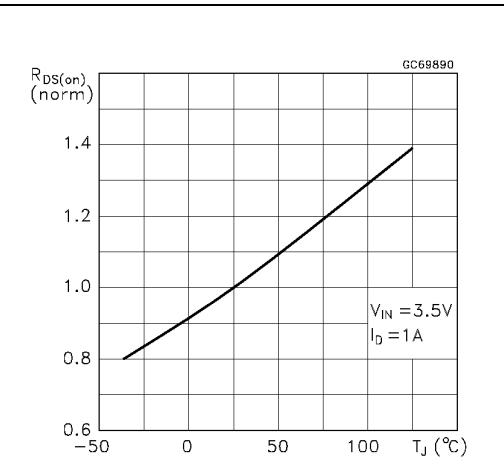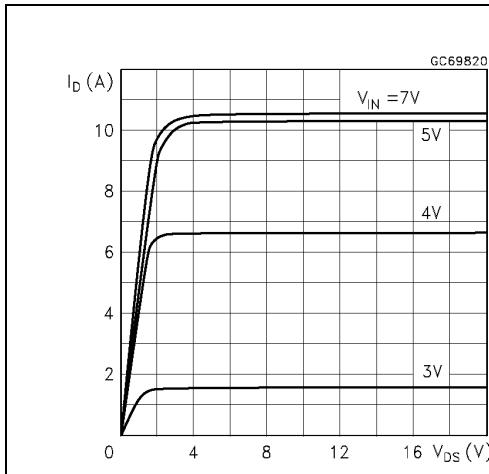

**Figure 26. Normalized input threshold voltage Vs. temperature**

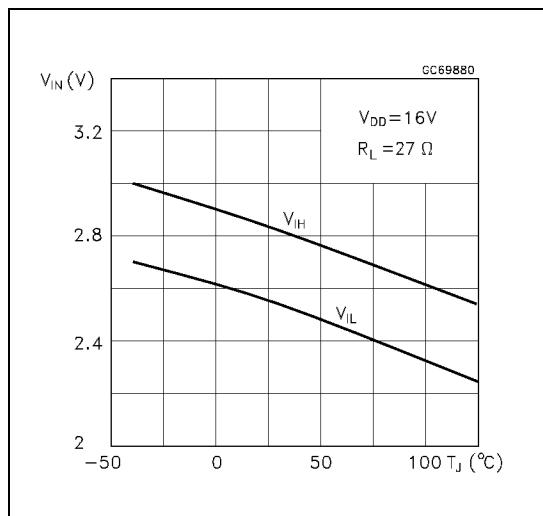

### 3 Protection features

During normal operation, the INPUT pin is electrically connected to the gate of the internal power MOSFET through a low impedance path as soon as  $V_{IN} > V_{IH}$ .

The device then behaves like a standard power MOSFET and can be used as a switch from DC to 50KHz. The only difference from the user's standpoint is that a small DC current  $I_{ISS}$  flows into the INPUT pin in order to supply the internal circuitry.

During turn-off of an unclamped inductive load the output voltage is clamped to a safe level by an integrated Zener clamp between DRAIN pin and the gate of the internal Power MOSFET.


In this condition, the Power MOSFET gate is set to a voltage high enough to sustain the inductive load current even if the INPUT pin is driven to 0V. The device integrates an active current limiter circuit which limits the drain current  $ID$  to  $I_{lim}$  whatever the INPUT pin Voltage.

When the current limiter is active, the device operates in the linear region, so power dissipation may exceed the heatsinking capability. Both case and junction temperatures increase, and if this phase lasts long enough, junction temperature may reach the overtemperature threshold  $T_{jsh}$ .

If  $T_j$  reaches  $T_{jsh}$ , the device shuts down whatever the INPUT pin voltage. The device will restart automatically when  $T_j$  has cooled down to  $T_{jrs}$ .

## 4 Thermal data

Figure 27. Thermal impedance for DPAK / IPAK

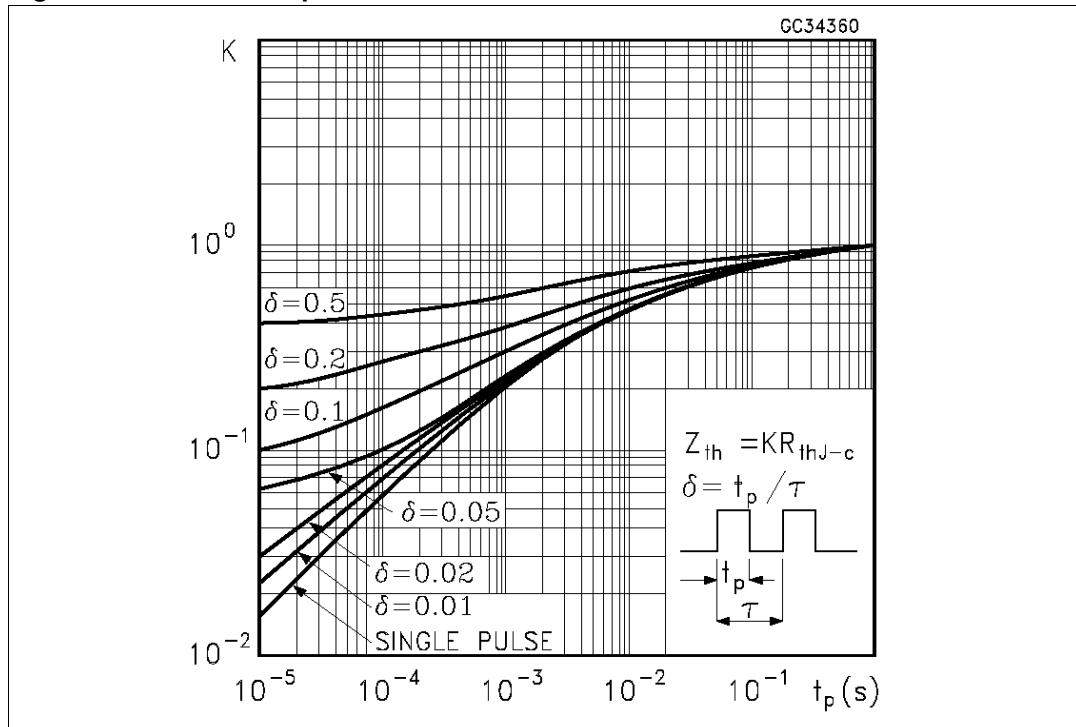


## 5 Package and packing information

### 5.1 ECOPACK® packages

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com).  
ECOPACK® is an ST trademark.

### 5.2 DPAK mechanical data

Figure 28. DPAK package dimensions

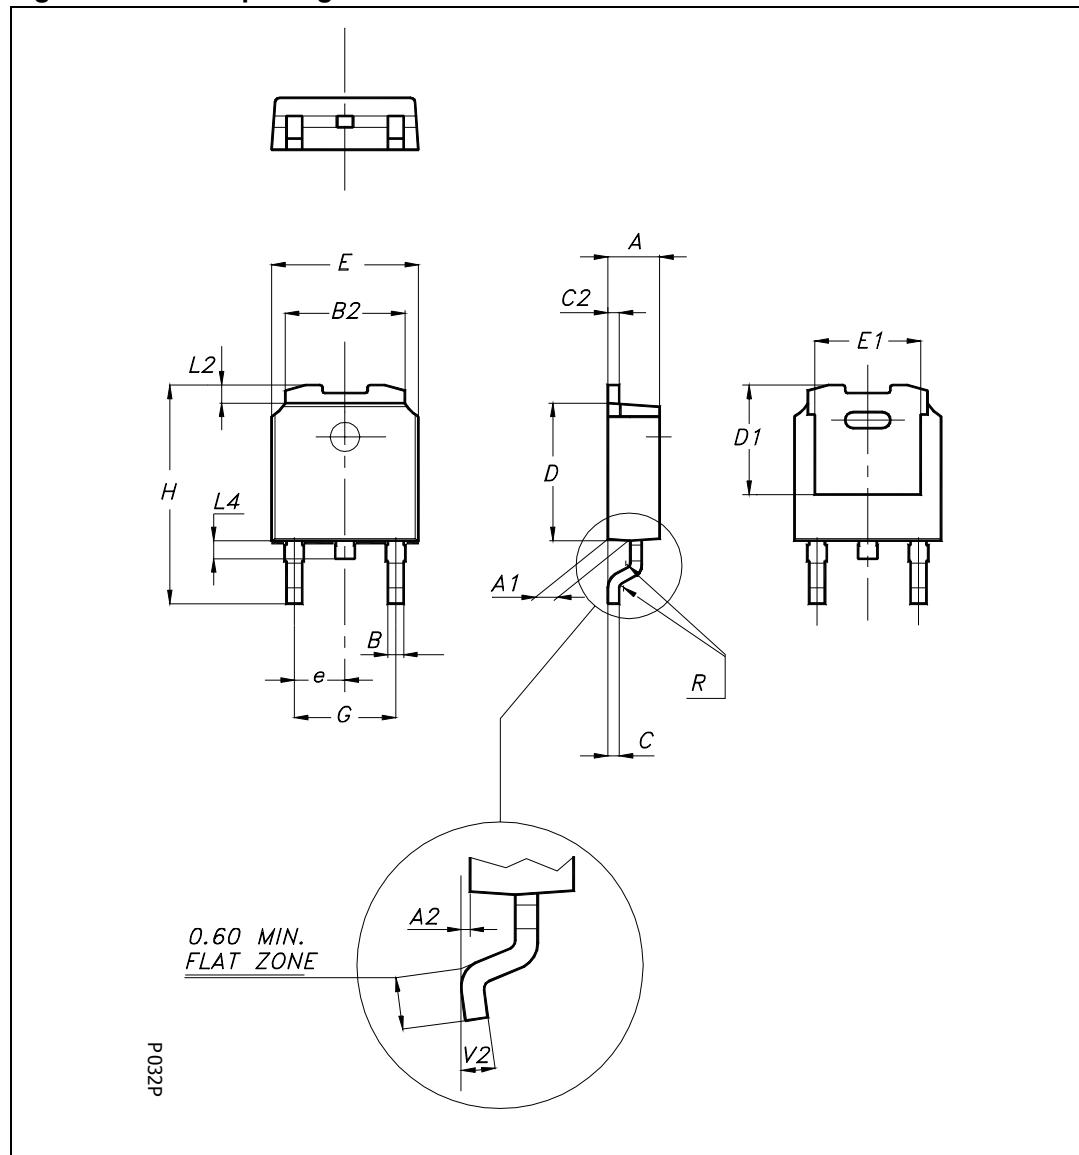

**Table 10. DPAK mechanical data**

| Dim.           | Millimeters |      |       |
|----------------|-------------|------|-------|
|                | Min.        | Typ. | Max.  |
| A              | 2.20        |      | 2.40  |
| A1             | 0.90        |      | 1.10  |
| A2             | 0.03        |      | 0.23  |
| B              | 0.64        |      | 0.90  |
| B2             | 5.20        |      | 5.40  |
| C              | 0.45        |      | 0.60  |
| C2             | 0.48        |      | 0.60  |
| D              | 6.00        |      | 6.20  |
| D1             |             | 5.1  |       |
| E              | 6.40        |      | 6.60  |
| E1             |             | 4.7  |       |
| e              |             | 2.28 |       |
| G              | 4.40        |      | 4.60  |
| H              | 9.35        |      | 10.10 |
| L2             |             | 0.8  |       |
| L4             | 0.60        |      | 1.00  |
| R              |             | 0.2  |       |
| V2             | 0°          | 8°   |       |
| Package weight | Gr. 0.29    |      |       |

## 5.3 IPAK mechanical data

Figure 29. IPAK mechanical data and package outline

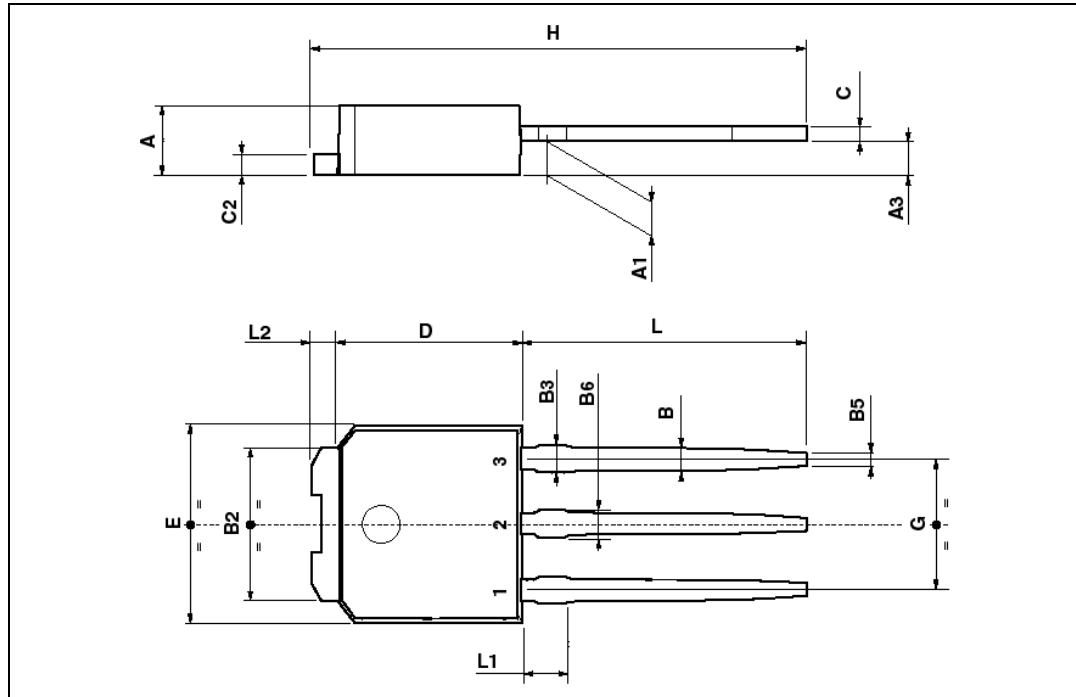



Table 11. IPAK mechanical data

| Symbol | Millimeters |      |      |
|--------|-------------|------|------|
|        | Min.        | Typ. | Max. |
| A      | 2.2         |      | 2.4  |
| A1     | 0.9         |      | 1.1  |
| A3     | 0.7         |      | 1.3  |
| B      | 0.64        |      | 0.9  |
| B2     | 5.2         |      | 5.4  |
| B3     |             |      | 0.85 |
| B5     |             | 0.3  |      |
| B6     |             |      | 0.95 |
| C      | 0.45        |      | 0.6  |
| C2     | 0.48        |      | 0.6  |
| D      | 6           |      | 6.2  |
| E      | 6.4         |      | 6.6  |
| G      | 4.4         |      | 4.6  |
| H      | 15.9        |      | 16.3 |
| L      | 9           |      | 9.4  |
| L1     | 0.8         |      | 1.2  |
| L2     |             | 0.8  | 1    |

## 5.4 DPAK packing information

The devices can be packed in tube or tape and reel shipments (see the [Device summary on page 1](#) ).

**Figure 30.** DPAK footprint

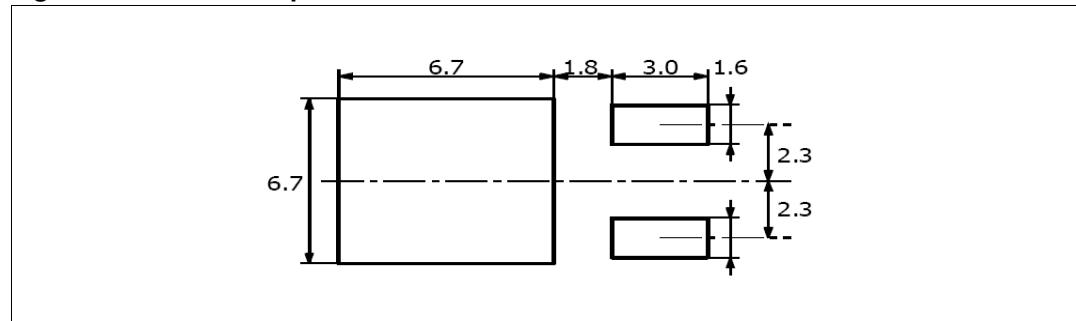

**Figure 31.** DPAK tube shipment (no suffix)



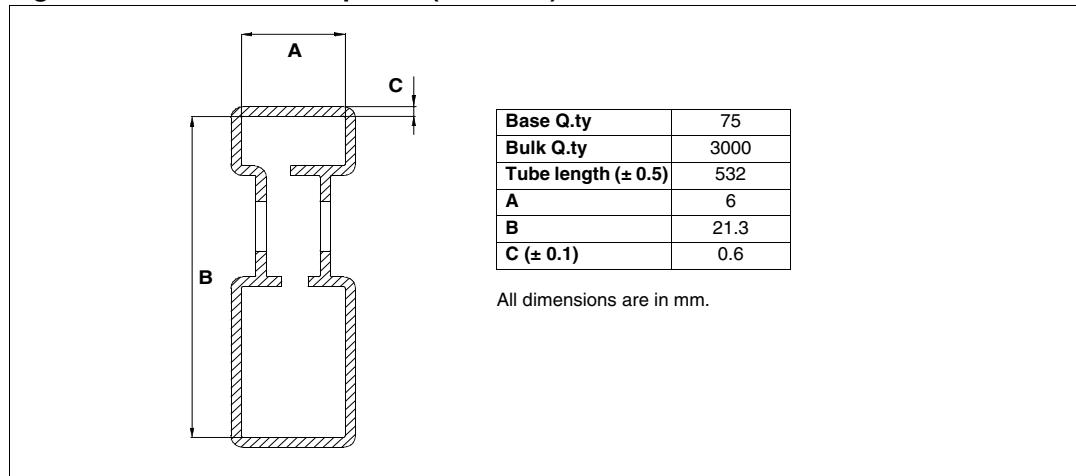


Figure 32. DPAK tape and reel shipment (suffix "TR")

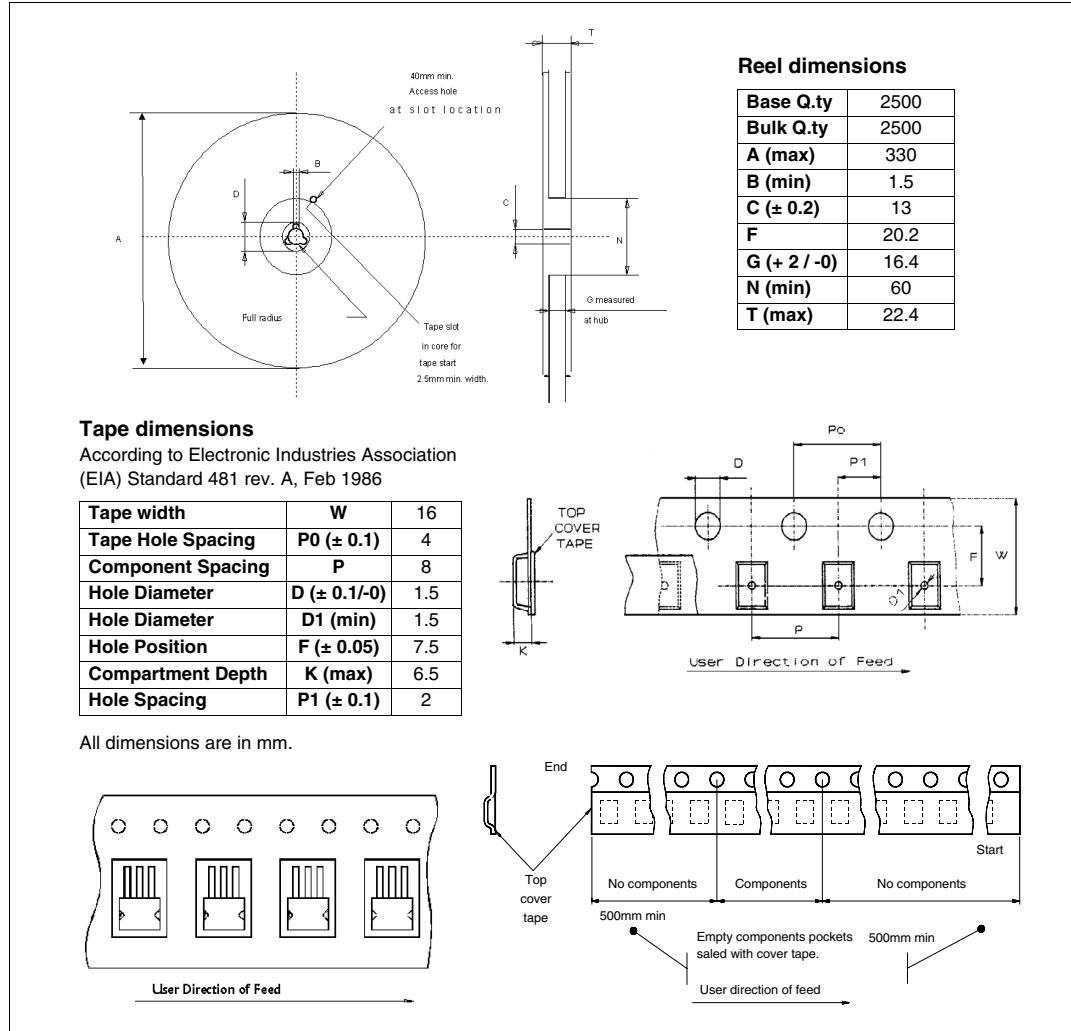

## 5.5 IPAK packing information

Figure 33. IPAK tube shipment (no suffix)

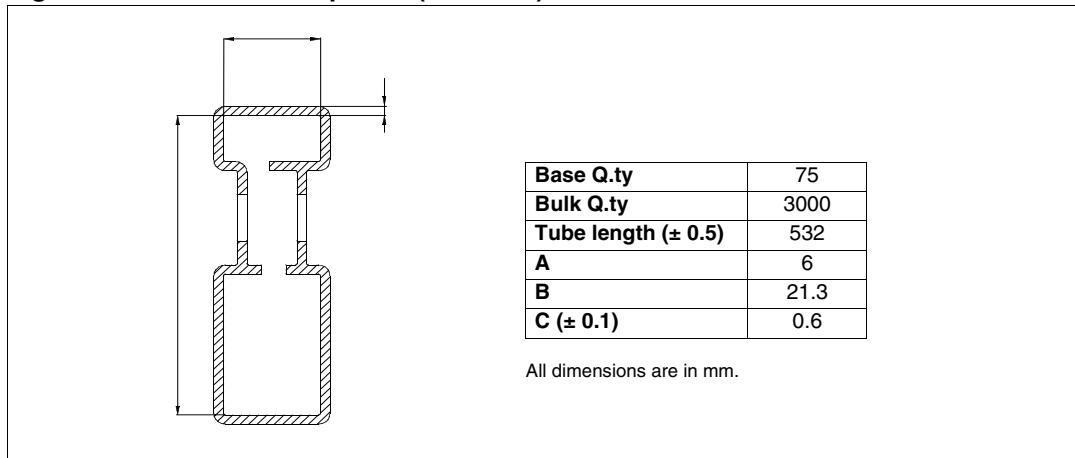

## 6 Revision history

**Table 12. Document revision history**

| Date        | Revision | Changes                                                                               |
|-------------|----------|---------------------------------------------------------------------------------------|
| Oct-1997    | 1        | Initial release.                                                                      |
| 22-Aug-2006 | 2        | Document restructured.                                                                |
| 12-Dec-2008 | 3        | Document restructured and reformatted.<br>Added <i>ECOPACK® packages</i> information. |
| 25-Sep-2013 | 4        | Updated disclaimer.                                                                   |

**Please Read Carefully:**

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

**UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.**

**ST PRODUCTS ARE NOT DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.**

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

[www.st.com](http://www.st.com)

