



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

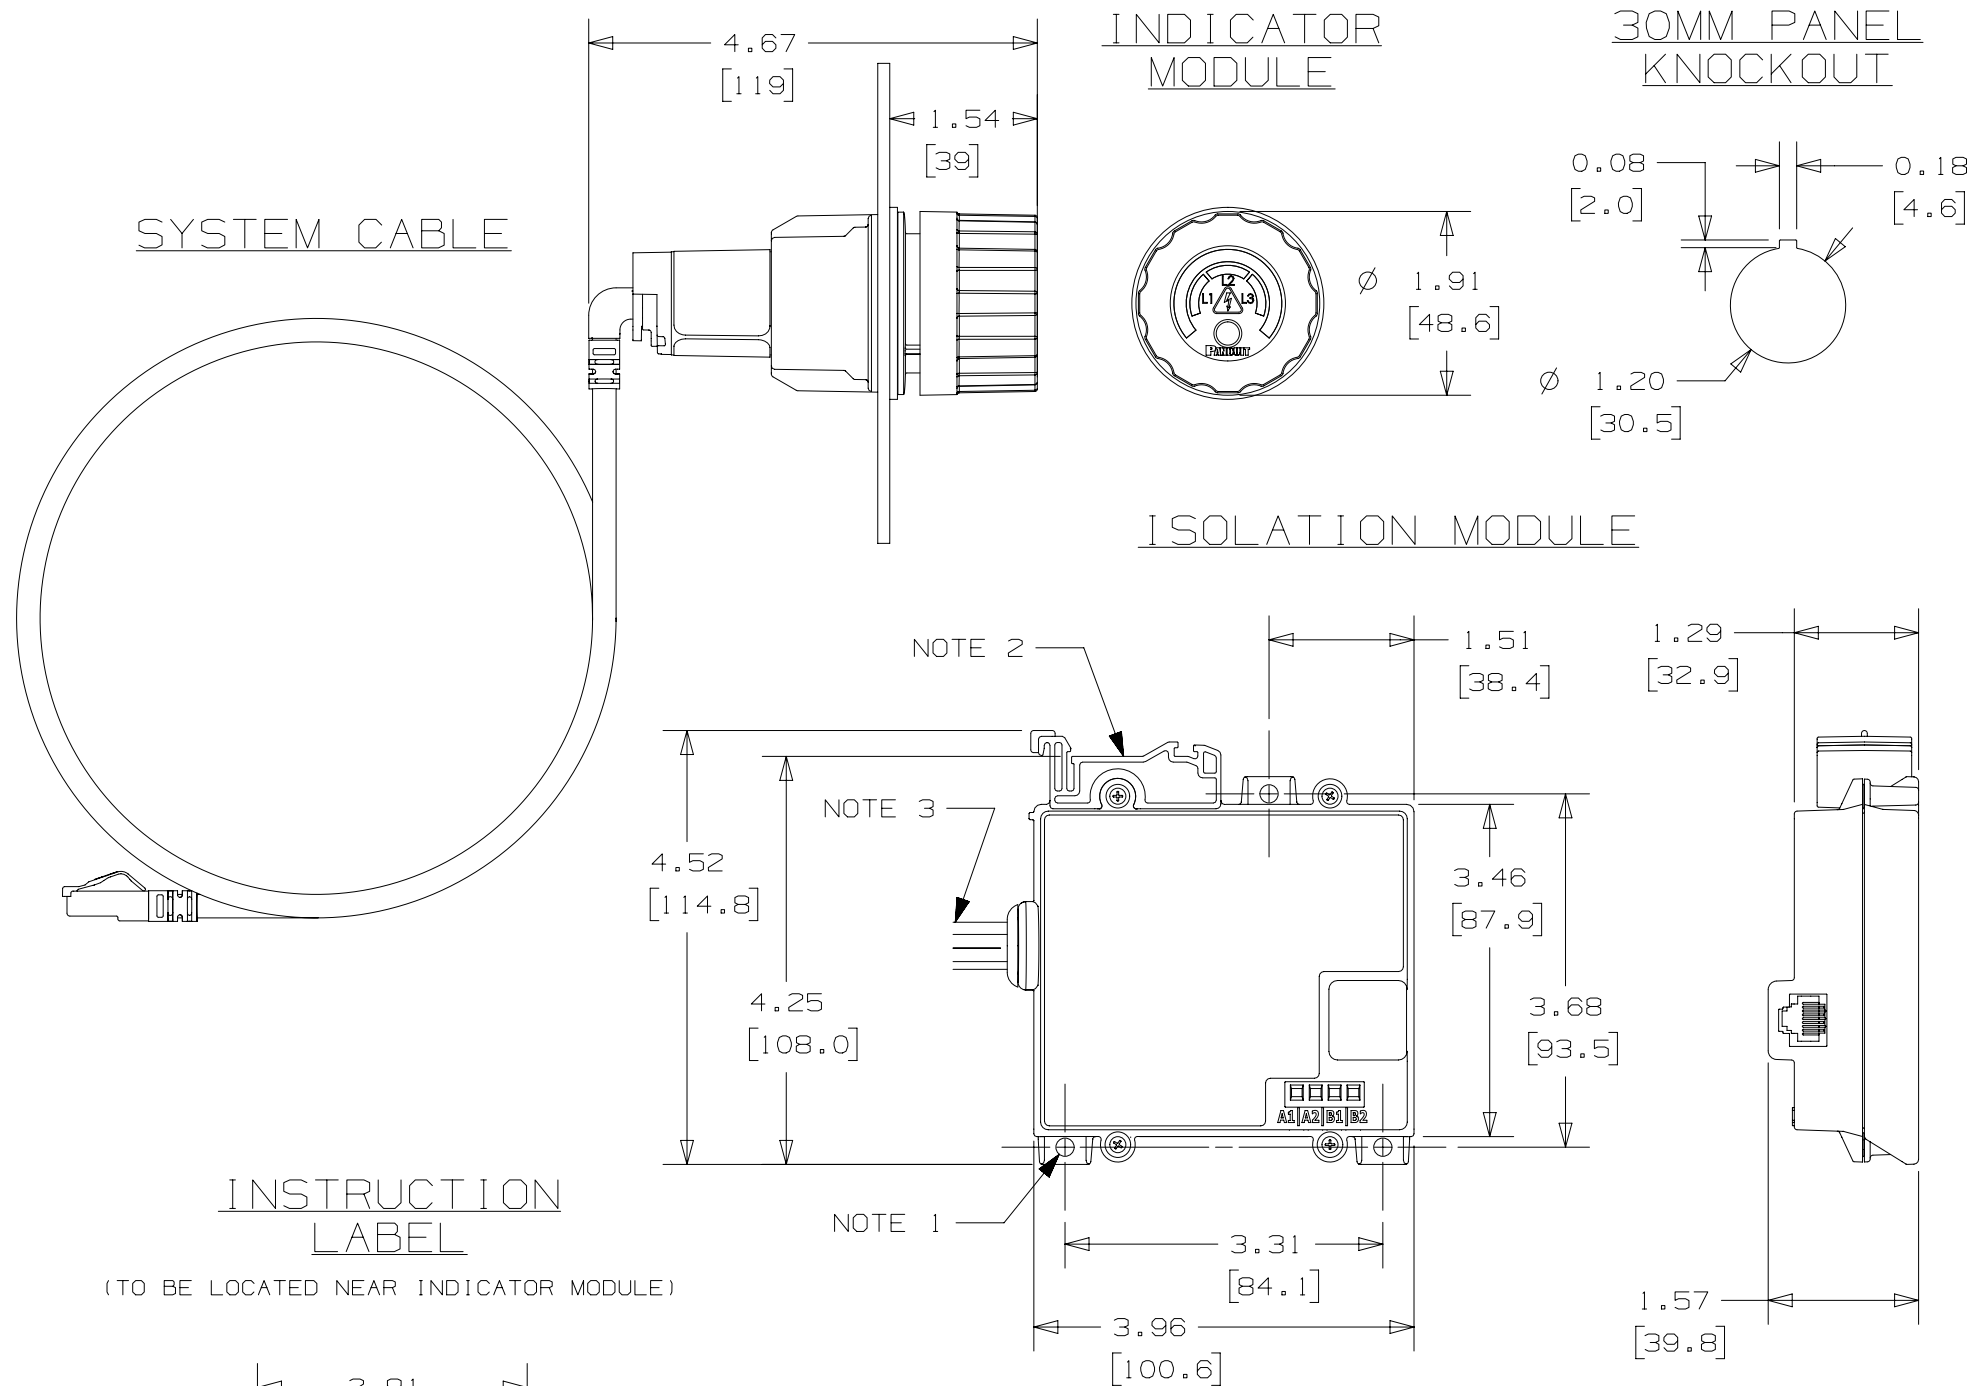

NOTES, UNLESS OTHERWISE SPECIFIED

1. Mount for #8 Pan Head Screw. 3 Places.
2. DIN Rail Mounting Feature
3. Lead Wires. QTY 8 - 14 AWG (2.08mm²)

READ PRODUCT INSTRUCTIONS BEFORE USING

PANDUIT PART NUMBER:

VS-AVT2-C02L03 (2 FT SYSTEM CABLE, 3 FT LEADS)
VS-AVT2-C08L10 (8FT SYSTEM CABLE, 10 FT LEADS)

GENERAL SPECIFICATIONS

**Rated for use in Class 1 Division 2 and Class 1 Zone 2
hazardous locations per ISA 12.12.01 and CSA C22.2 NO. 213**

Electrical System:	For use in 1, 2, or 3-phase AC systems
Voltage Detection Range:	Up to 600V AC (50/60Hz), 600V DC
Absence of Voltage Threshold:	3V
Overvoltage Category:	III (600V)
Degree of Protection:	NEMA 1, 12, 4, 4X, 13 / IP66, IP67*



Environmental

Operating Temperature:	0°C to +60°C (32°F to 140°F)
Storage Temperature:	-45°C to +85°C (-49°F to +185°F)
Humidity:	5 to 95% non-condensing
Pollution Degree:	3

Battery
Voltage: Industrial 3.6V Lithium AA
Serviceability: User Replaceable.

Weight
Units with 2 ft system cables and 3 ft leads weigh 1202 gms / 2.65 lbs
Units with 8 ft system cables and 10 ft leads weigh 1792 gms / 3.95 lbs

***Degree of protection specified is related to Indicator Module only**

							TITLE VERISAFE HAZ-LOC ABSENCE OF VOLTAGE TESTER					
							CUSTOMER DRAWING					
							ITEM REVISION NAME 18I216AG/00					
							DATASET FILE NAME 18I216AG_DC/00					
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .1 [2.54] .XXX ± .005 [.127] .XX ± .01 [.25] ANGLES ± 5 °			MATERIAL: N/A		
							 THIRD ANGLE PROJECTION			DRAWING NUMBER: 18I216AG_DC		
0	5/9/18	DFA	CLW	MSAD	INITIAL RELEASE	GAECN05272						
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	DRAWN BY DFA	DATE 5/9/18	CHK MSAD	SCALE NTS	SHT 1 OF 1	SIZE B