



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






KBPC1, KBPC6 SERIES

3A, 6A single phase rectifier bridges

Maximum Ratings

	KBPC1	KBPC6	Units
I_O	3	6	A
I_{FSM}	50Hz	50	A
	60Hz	55	A
I^2t	50Hz	12.5	A ² s
	60Hz	11.4	A ² s
V_{RRM}	50 to 1000		V

Circuit

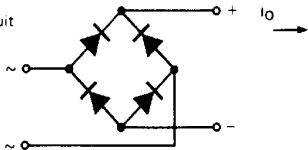


Description

3A and 6A single phase encapsulated bridge rectifiers consisting of four single diodes connected as a full bridge. They are suitable for general applications in industrial and consumer equipment.

Features

- Suitable for printed circuit board or chassis mounting
- Compact construction
- High surge current capability

KBPC1, KBPC6

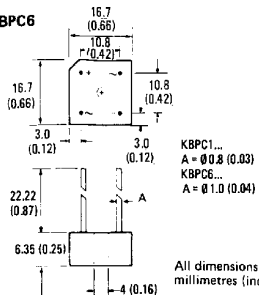

Electrical Specifications

		KBPC1	KBPC6	Units	Conditions
I_O	Maximum DC Output current	3.0	6.0	A	$T_C = 50^\circ\text{C}$, Resistive and inductive load
		2.4	4.7	A	$T_C = 50^\circ\text{C}$, capacitive load
I_{FSM}	Maximum peak one cycle, non-repetitive surge current	50	125	A	$t = 10\text{ms}, 20\text{ms}$ Following any rated load condition and with rated V_{RRM} reapplied
		55	137	A	$t = 8.3\text{ms}, 16.7\text{ms}$
I^2t	Maximum I^2t capability for fusing	12.5	78	A^2s	$t = 10\text{ms}$ Initial $T_J = T_J \text{ max}$
		11.4	71	A^2s	$t = 8.3\text{ms}$ 100% V_{RRM} reapplied
		17.7	110	A^2s	$t = 10\text{ms}$ Initial $T_J = T_J \text{ max}$
		16.1	100	A^2s	$t = 8.3\text{ms}$ No voltage reapplied
$I^2\sqrt{t}$	Maximum $I^2\sqrt{t}$ capability for fusing	177	1105	$A^2\sqrt{s}$	$t = 0.1$ to 10ms , No voltage reapplied
V_{FM}	Maximum peak forward voltage per diode	1.1	1.2	V	$I_{FM} = 0.5 \times I_O$, $T_J = 25^\circ\text{C}$
I_{RM}	Typical peak reverse leakage current per diode	10	10	μA	$T_J = 25^\circ\text{C}$
		1.0	1.0	mA	$T_J = 150^\circ\text{C}$ 100% V_{RRM}
f	Operating frequency range	40 to 1000		Hz	

Thermal and Mechanical Specifications

		KBPC1	KBPC6	Units	Conditions
T_J	Operating temperature range	-40 to 150		$^\circ\text{C}$	
T_{stg}	Storage temperature range	-40 to 150		$^\circ\text{C}$	
W	Approximate weight	5 (0.18)	6 (0.21)	g (oz)	

Voltage Specifications

Part number		V_{RRM} Maximum repetitive peak reverse voltage	V_{RSM} Maximum non-repetitive peak reverse voltage	V_{RMS} Maximum recommended RMS supply voltage
		V	V	V
KBPC1005	KBPC6005	50	50	20
KBPC102	KBPC602	200	200	80
KBPC104	KBPC604	400	400	125
KBPC106	KBPC606	600	600	250
KBPC108	KBPC608	800	800	380
KBPC110	KBPC610	1000	1000	500

Fig. 1 – Case Temperature Ratings

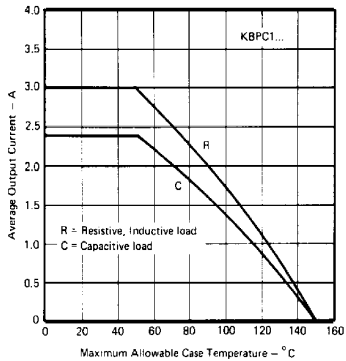


Fig. 2 – Case Temperature Ratings

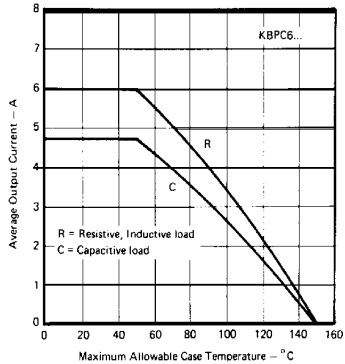


Fig. 3 – Non-Repetitive Surge Ratings

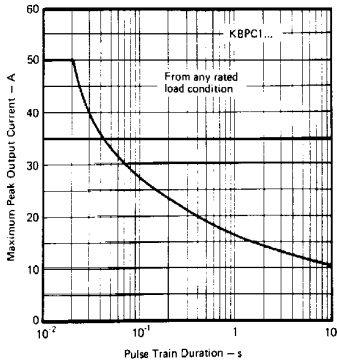


Fig. 4 – Non-Repetitive Surge Ratings

