



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SERIES: VSKM-S10 | **DESCRIPTION:** MEDICAL AC-DC POWER SUPPLY

FEATURES


- up to 10 W continuous power
- compact board mount design
- universal input (85~264 Vac / 120~370 Vdc)
- single output from 3.3~24 V
- over current and short circuit protections
- full medical approvals
- efficiency up to 80%



MODEL	output voltage	output current	output power	ripple and noise ¹	efficiency
	(Vdc)	max (A)	max (W)	typ (mVp-p)	typ (%)
VSKM-S10-3R3U	3.3	2	6.6	50	70
VSKM-S10-5U	5	2	10	50	74
VSKM-S10-9U	9	1.1	10	50	76
VSKM-S10-12U	12	0.9	10	50	76
VSKM-S10-15U	15	0.7	10	50	78
VSKM-S10-24U	24	0.45	10	50	80

Notes: 1. Ripple and noise measured at 20 MHz bandwidth

PART NUMBER KEY

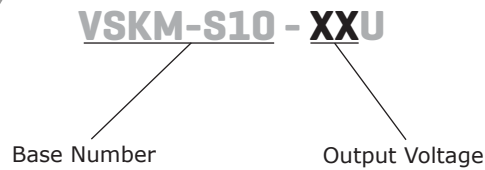

INPUT

parameter	conditions/description	min	typ	max	units
voltage		85 120		264 370	Vac Vdc
frequency		47		63	Hz
current	at 110 Vac at 230 Vac		230 150		mA mA
inrush current	at 110 Vac at 230 Vac		10 20		A A
input fuse	slow blow, 250 V		2		A
leakage current	230 V ac, 50 Hz		0.1		mA

OUTPUT

parameter	conditions/description	min	typ	max	units
line regulation			±0.5		%
load regulation	10 ~ 100%		±1		%
temperature coefficient			0.02		%/°C
hold-up time	at 230 Vac		50		ms
voltage set point accuracy	3.3 V output all other models		±3 ±2		% %
switching frequency			60		kHz

PROTECTIONS

parameter	conditions/description	min	typ	max	units
over current protection				110	%
short circuit protection	auto recovery with no damage from a short on any output				

SAFETY & COMPLIANCE

parameter	conditions/description	min	typ	max	units
isolation voltage	primary to secondary (for 1 minute)	4,000			Vac
safety approvals	IEC 60601-1, EN 60601-1, UL 60601-1				
safety class	class II				
EMI/EMC ¹	EN 55011 (level B), IEC/EN 61000-4-2 level 4 (8kV/15kV), IEC/EN 61000-4-3, IEC/EN 61000-4-4 level 4 (4kV), IEC/EN 61000-4-5 level 4 (2kV/4kV)				
RoHS compliant	yes				
MTBF	25°C	300,000			hrs


Notes: 1. external EMC application circuit is required

ENVIRONMENTAL


parameter	conditions/description	min	typ	max	units
operating temperature		-25		70	°C
storage temperature		-40		105	°C
case temperature				95	°C
operating humidity	non-condensing			95	%

DERATING CURVES

1. output power vs. ambient temperature

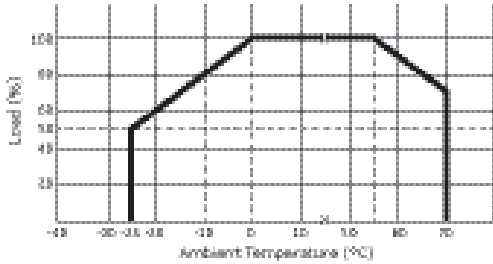

2. output power vs. input voltage


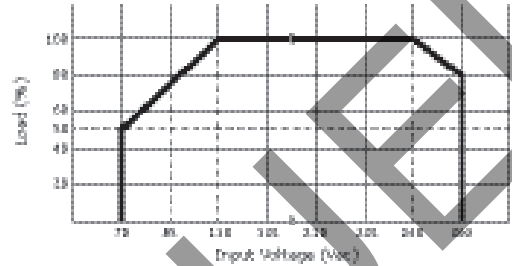


MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	2.1 x 1.12 x 0.75 (53.5 x 28.5 x 19.0 mm)				inch
case material	UL94V-0				
weight		47	50	53	g


MECHANICAL DRAWING

units: mm [inches]
 tolerance: ±0.5 [±0.02]
 pin section tolerance: ±0.10 mm [±0.004]

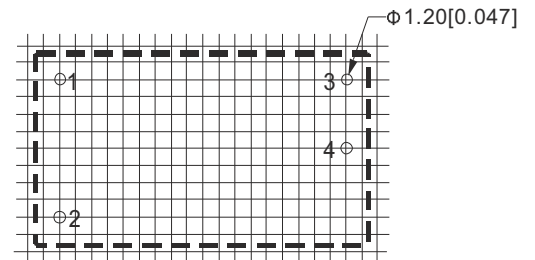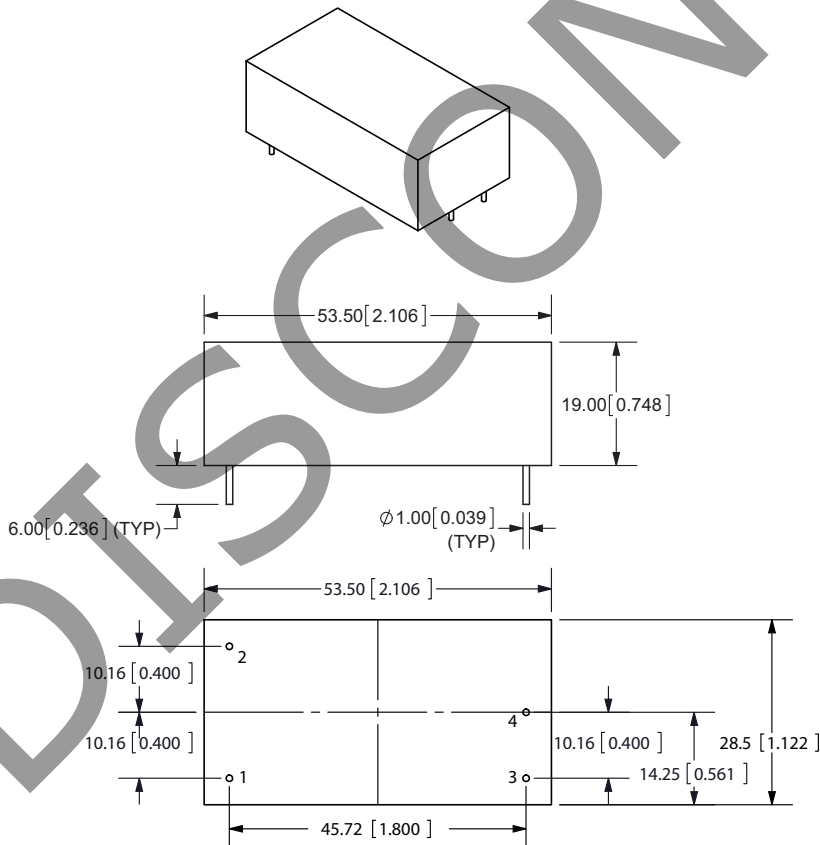

PIN CONNECTIONS	
PIN	FUNCTION
1	AC(N)
2	AC(L)
3	+Vo
4	-Vo

TYPICAL APPLICATION CIRCUIT

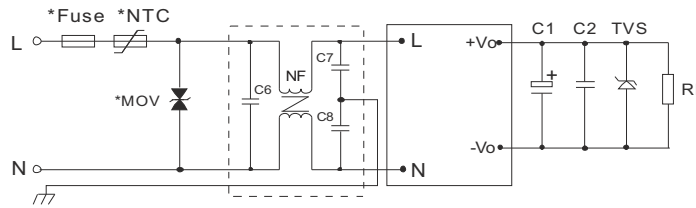

EXTERNAL CAPACITORS TYPICAL VALUE (Unit: μF)			
MODEL	C1	C2	TVS
VSKM-S10-3R3U	220 $\mu\text{F}/10\text{ V}$	0.1 $\mu\text{F}/50\text{ V}$	P6KE6.8A
VSKM-S10-5U	220 $\mu\text{F}/10\text{ V}$	0.1 $\mu\text{F}/50\text{ V}$	P6KE6.8A
VSKM-S10-9U	120 $\mu\text{F}/25\text{ V}$	0.1 $\mu\text{F}/50\text{ V}$	P6KE12A
VSKM-S10-12U	120 $\mu\text{F}/25\text{ V}$	0.1 $\mu\text{F}/50\text{ V}$	P6KE20A
VSKM-S10-15U	120 $\mu\text{F}/25\text{ V}$	0.1 $\mu\text{F}/50\text{ V}$	P6KE20A
VSKM-S10-24U	68 $\mu\text{F}/35\text{ V}$	0.1 $\mu\text{F}/50\text{ V}$	P6KE30A

- Notes:
- Output filtering capacitor C1 is an electrolytic capacitor. It is recommended to use high frequency and low impedance electrolytic capacitors. For capacitance and current of capacitor please refer to manufacture's datasheet. Voltage derating of capacitor should be 80% or above. C2 is ceramic capacitor, it is used to filter high frequency noise. TVS is a recommended component to protect post-circuits (if converter fails).
 - MOV is required to protect the device under surge.
 - It is recommended to use a 2A/250V slow blow FUSE. External input NTC is recommended to use 5D-9.
 - If EMC performance is required, it is recommended to add "EMC filter" at the input end (see EMC Application Figure).
 C6: X capacitor, recommended parameter 0.1 $\mu\text{F}/275\text{V}$;
 C7,C8: Y capacitor, recommended parameter 2200pF/400V;
 NF: common model choke, recommended inductance is about 10mH-30mH.

REVISION HISTORY

rev.	description	date
1.0	initial release	01/19/2012
1.01	V-Infinity branding removed	09/11/2012

The revision history provided is for informational purposes only and is believed to be accurate.



CUI INC[®]

Headquarters
 20050 SW 112th Ave.
 Tualatin, OR 97062
800.275.4899

Fax 503.612.2383
cui.com
 techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.