

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







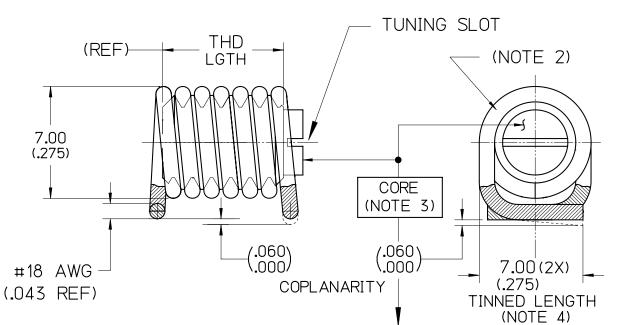

KNOWLES P/N	MIN	NOM	L <i>(nH)</i> MAX	NO CORE	Q (@ 100 MHz)	SRF (GHz)	TURNS	THD LGTH mm (in)
VTC02E030TRSM	32	33	34	39	90	1.2	2	6(.236)
VTC03E048TRSM	46	49	52	59	95	1.0	3	6(.236)
VTC03E055TRSM	50	55	60	64	95	1. 0	3	6(.236)
VTC04E065TRSM	60	64	68	78	101	0 . 9	4	6(.236)
VTC05E088TRSM	74	81	87	99	114	0.9	5	8(.315)
VTC06E110TRSM	94	107	119	123	119	0.7	6	8(.315)
VTC07E130TRSM	104	118	133	142	121	0.7	7	10(.394)

MI DRG. NO.

VTCXXEYYYTRSMA

VTCXXEYYYTRSM

Α

VARIABLE INDUCTOR COIL (NONMAGNETIC)

U.S. PATENT No. 8,248,198

FILE: AIROUT

NOTES:

- 1. a. DIMENSIONS: mm
 - b. DIMENSIONS: (inches) FOR REFERENCE
- 2. COIL :
 - a. MATERIAL: COPPER ALLOY (COATED)
 - b. COATING ABLE TO WITHSTAND 275°C FOR 100 HOURS AS PER NEMA "CLASS 200". (REF ASTM D2307)
- 3. CORE :
 - a. MATERIAL:
 PTFE / COPPER ALLOY
 - b. SELF-RESONANT FREQUENCY (SRF) IS MEASURED WITH THE CORE) FULLY ENGAGED AS DEPICTED
 - c. L MIN MEASURED WITH CORE ENGAGING FULL WINDINGS. L MAX MEASURED WITH CORE ENGAGING A SINGLE TURN.
- 4. TINNING :
 - a. MATERIAL:
 RoHS COMPLIANT "SAC" ALLOY

READINGS TAKEN ON AGILENT/8358-A METER.

Knowles

DLI - Johanson MFG - Novacap - Syfer - Voltronics

Knowles Cazenovia 2777 Route 20 East Cazenovia, NY 13035

	Α	11/06	/17	MAI		-	-	001457	
	LEVEL	DATE		DRN.	CHK.		APP.	ECN	
	REVISIONS								
	DRN. CHR		CHk			APP.		SCALE	
			MAI		MAI		NONE		
	DATE DA		E		DATE		.XX ± .762		
	11/06/17 11/		/07/17 11/		11/0	7/17	.XXX ± .254		