



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



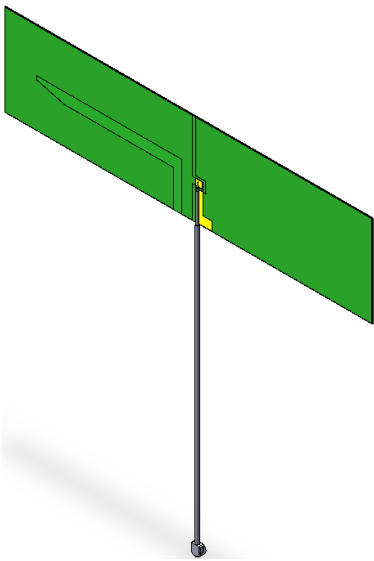

Application note

High Efficiency Wideband LTE Dipole Antenna

*Covered frequency range:
698MHz – 960MHz
and 1710MHz – 2690MHz*

Pulse Part Number: W3554


Status

| | | | |
|--------------------|------|----------------|------------|
| Author | TLa | Version | 1.0.1 |
| Checked by | KiKo | Date | 2012.03.23 |
| Approved by | KiKo | Date | 2012.03.23 |

Table of Contents

| | |
|--------------------------------------------------------|-----------|
| <i>General Features and Applications.....</i> | <i>3</i> |
| <i>Antenna Dimensions and Coaxial Feed Cable</i> | <i>4</i> |
| <i>Test Setup for Electrical Measurements</i> | <i>5</i> |
| <i>Electrical Performance Test Results</i> | <i>7</i> |
| <i>Contact Information.....</i> | <i>11</i> |

High Efficiency Wideband LTE Dipole Antenna



Features

- Coaxial Feed
- Single Feed Point
- Size W x L x H (30mm x 120mm x 0.2mm)
- Low Weight (1.5g)
- Lead Free Materials
- Lead Free Soldering Compatible
- RoHS Compliant
- Coaxial Cable Connector:
 - Hirose Connector U.FL- Series (I.PEX Connector MHF- Series Compatible)

Applications

LTE devices operating on GSM bands (GSM850, EGSM900, PCN1800, PCS1900), WCDMA band 1, LTE700 and LTE2.6GHz.

Electrical specifications @ +25 °C

Note: Antenna's electrical characteristics depend on test board ground plane (GP) size, antenna positioning in relative to GP, antenna distance to test board and antenna surrounding mechanics.

W3554: Typical electrical characteristics of High Efficiency Wideband LTE Dipole Antenna.


Antenna measured in Free Space Environment (FS) without test board presence (see slide 6).

| Operating Band | Frequency Range [MHz] | 3D Efficiency [%] / [dB] | Return loss at band edges [dB] | Impedance [Ω] | Operating Temperature [°C] |
|----------------|-----------------------|--------------------------------------------------------|--------------------------------|------------------------|----------------------------|
| LTE700* | 698 - 798 | 61 / -2.2 ; 80 / -0.9 (band edges) 80 / -0.9 (peak) | -5.4 / -12.2 | 50 | -40 to +85 |
| GSM850 | 824 - 894 | 86 / -0.6 ; 68 / -1.7 (band edges) 86 / -0.6 (peak) | -15.5 / -8.6 | | |
| EGSM900 | 880 - 960 | 64 / -1.9 ; 49 / -3.0 (band edges) 68 / -1.7 (peak) | -10 / -4.7 | | |
| PCN1800 | 1710 - 1880 | 61 / -2.2 ; 63 / -2.0 (band edges) 63 / -2.0 (peak) | -6.6 / -8.2 | | |
| PCS1900 | 1850 - 1990 | 63 / -2.0 ; 65 / -1.9 (band edges) 65 / -1.9 (peak) | -7.6 / -10.2 | | |
| WCDMA band 1 | 1920 - 2170 | 64 / -1.9 ; 76 / -1.2 (band edges) 76 / -1.2 (peak) | -8.5 / -15 | | |
| LTE2.6GHz** | 2500 - 2690 | 86 / -0.7 ; 80 / -1 (band edges) 87 / -0.6 (peak) | -20.5 / -10.7 | | |
| LTE2.4GHz*** | 2300 - 2400 | 85 / -0.7 (band edges) 85 / -0.7 (peak) | -20 / -27.1 | | |

* (E)-UTRA/FDD bands 12, 13, 14, 15. ** (E)-UTRA/FDD band 7. *** (E)-UTRA/TDD band 40.

High Efficiency Wideband LTE Dipole Antenna

Antenna Dimensions and Coaxial Feed Cable

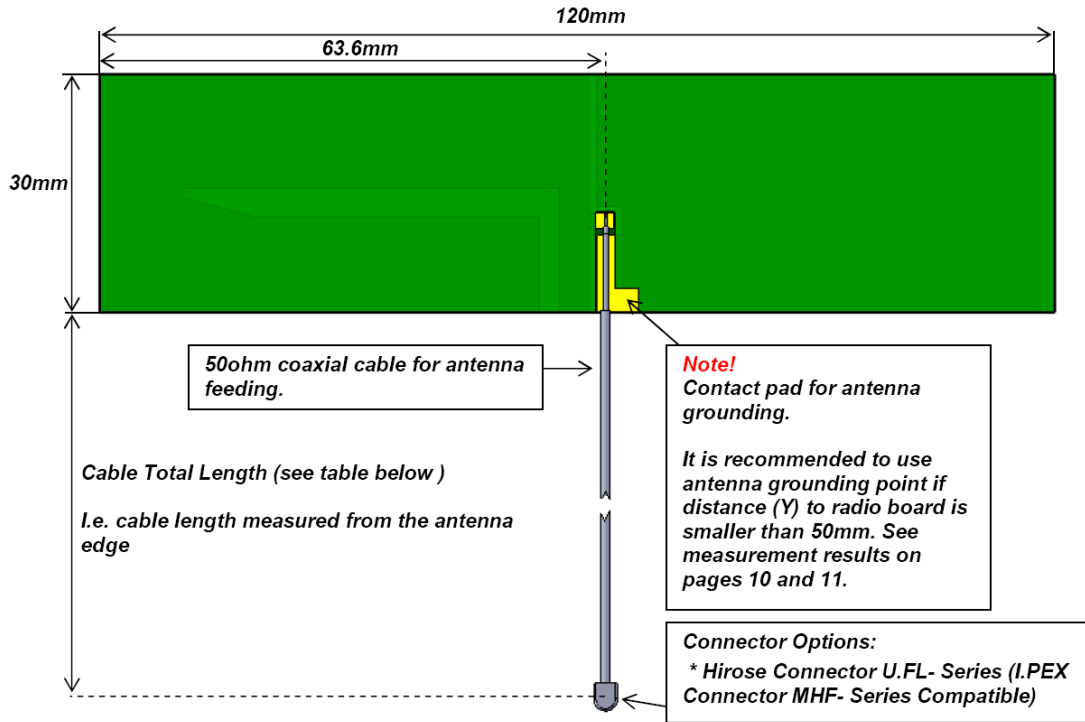


| Part No. | Cable length | Connector type |
|------------|--------------|-----------------------|
| W3554B0140 | 140mm | MHF-Series Compatible |

High Efficiency Wideband LTE Dipole Antenna

Test Setup

Antenna was measured in Free Space Environment (FS) without test board presence.

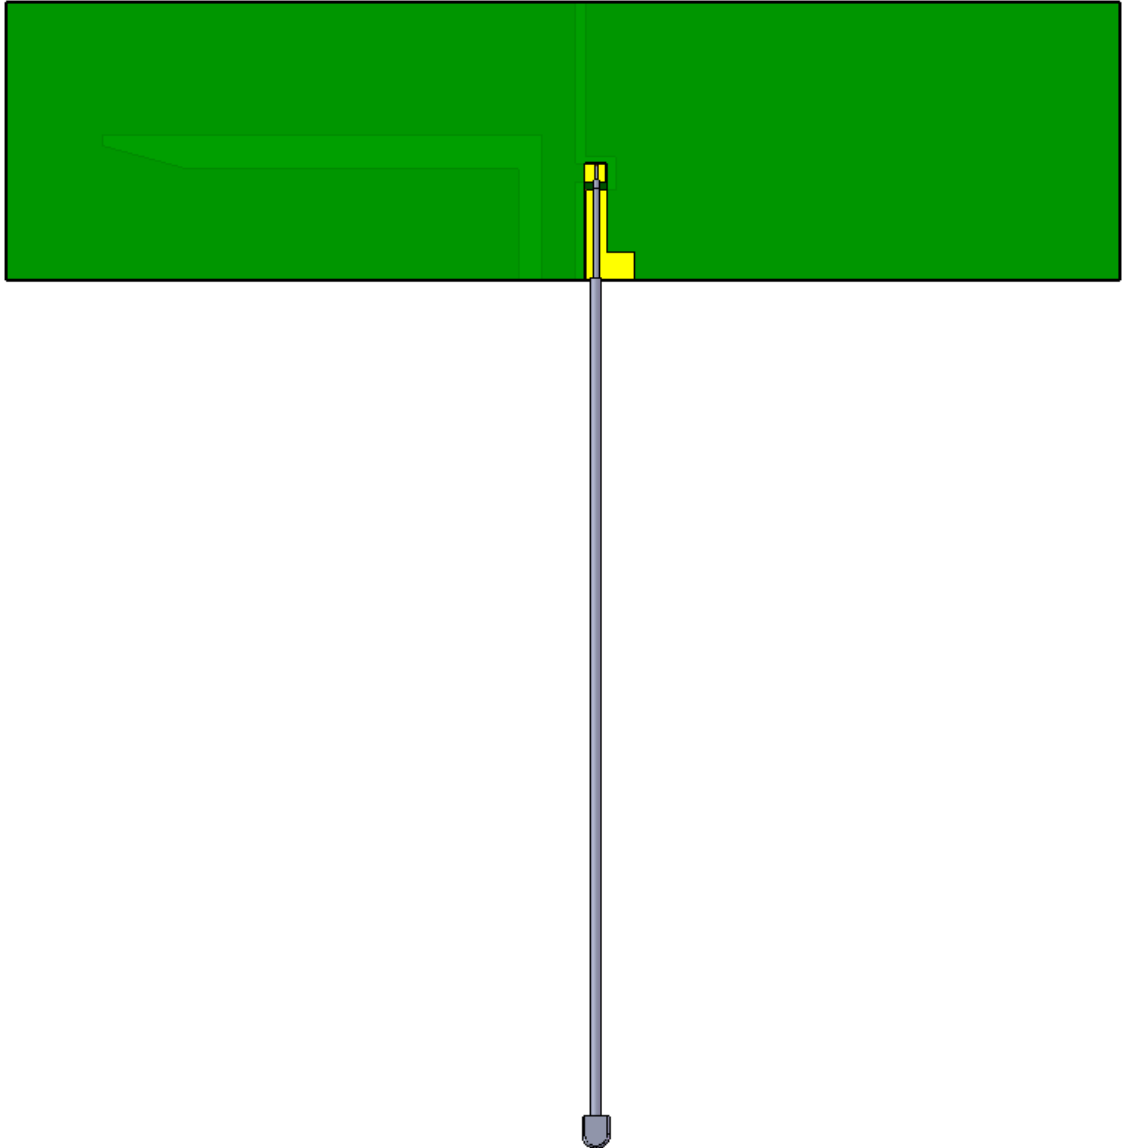


Test Setup Matrix for Electrical Measurements

Antenna was tested totally with 6 different measurement setups as presented in table below. Antenna distance (Y) to test board GP was changed. Also antenna grounding effect to antenna's electrical characteristics was investigated.

W3554 Test Setup Matrix for Electrical Measurements

| Test No. | NOTE | Y [mm] | Antenna grounding in use |
|----------|-----------------------------|--------|--------------------------|
| 1 | Without test board presence | - | - |
| 2 | | 50 | No |
| 3 | | 50 | Yes |
| 4 | | 30 | Yes |
| 5 | | 30 | Yes |
| 6 | | 10 | Yes |

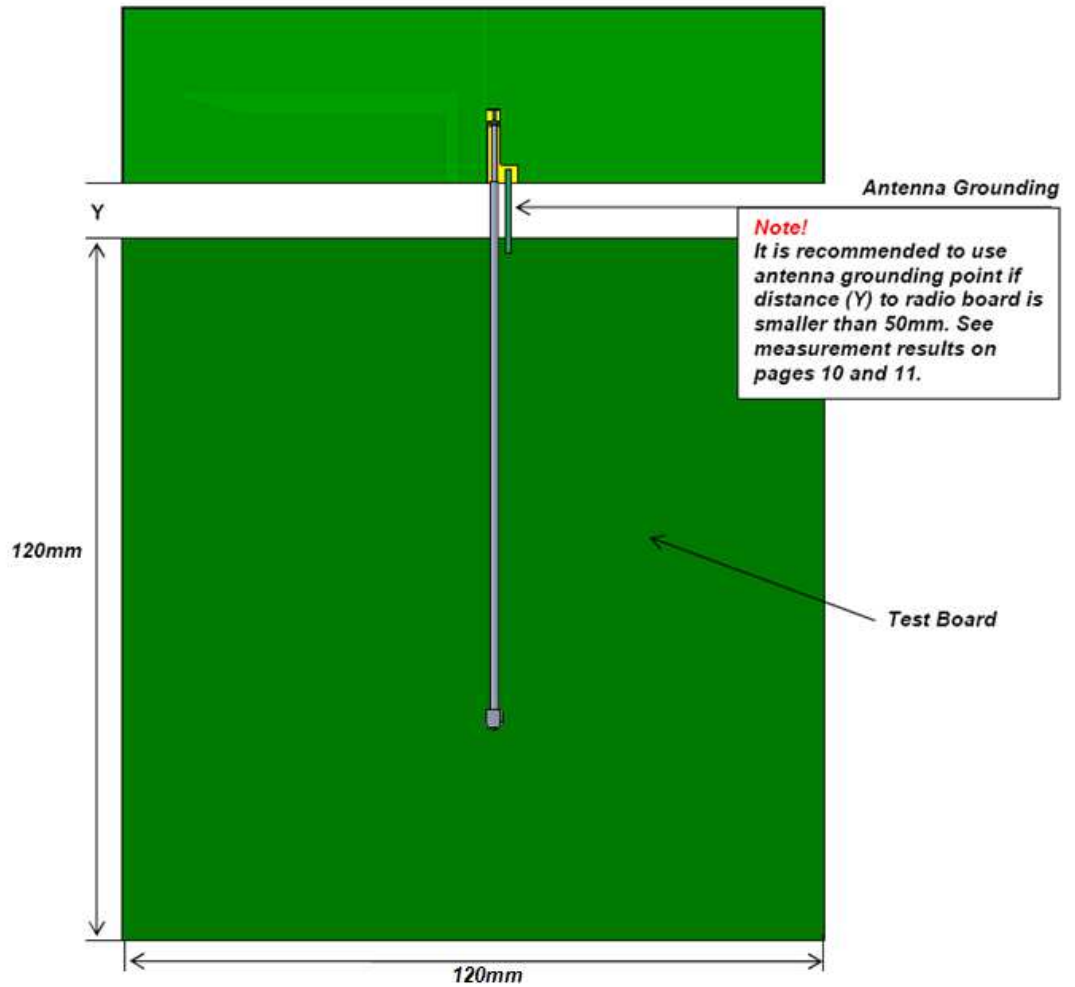


High Efficiency Wideband LTE Dipole Antenna

Typical Electrical Characteristics (T=25 °C)


Antenna was measured in Free Space Environment (FS) without test board presence (see page 6).

W3554 Typical Return Loss in dB

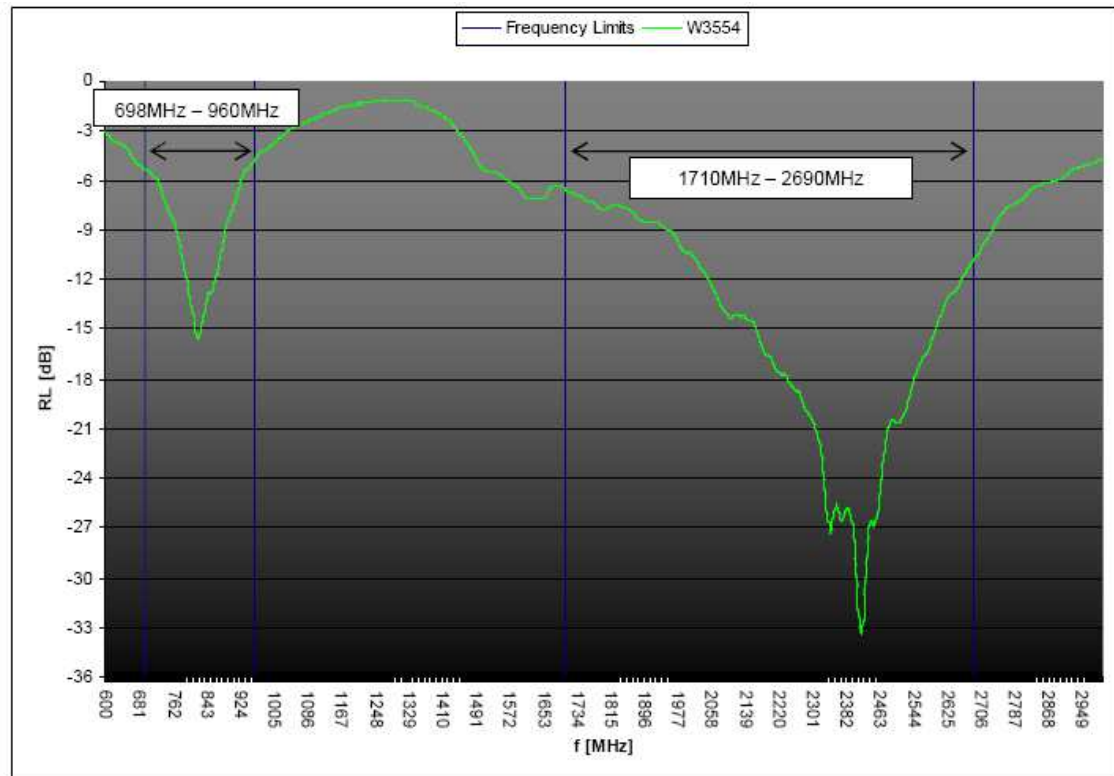


Antenna was tested totally with 6 different measurement setups as presented in table on page 7. Antenna distance (Y) to test board GP was changed. Also antenna grounding effect to antenna's electrical characteristics was investigated.

W3554 Typical Return Loss in dB

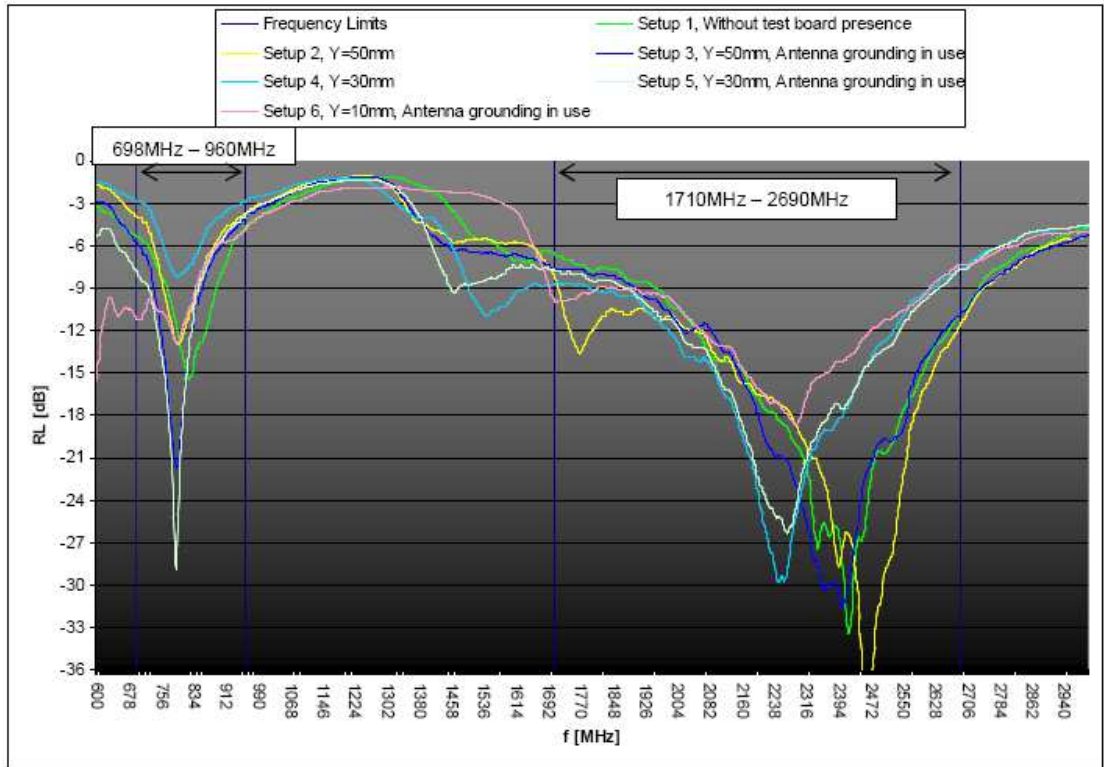


Antenna was measured in Free Space Environment (FS) without test board presence (see page 6).

W3554 Typical Total Efficiencies in %

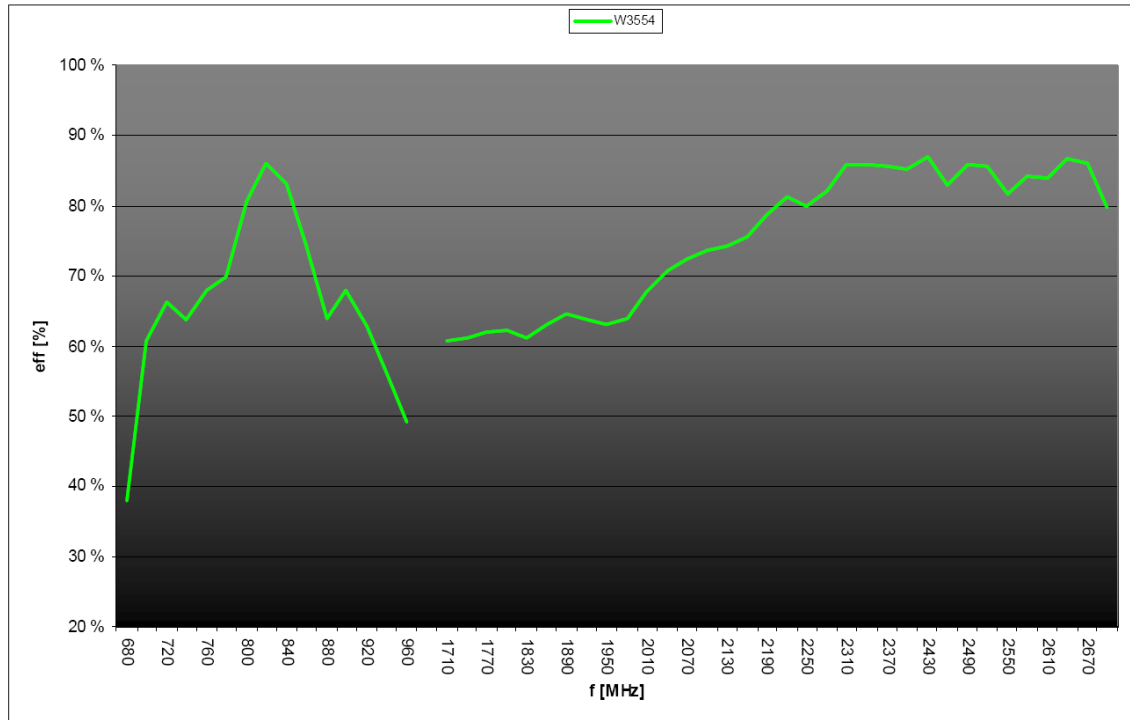


Antenna was tested totally with 6 different measurement setups as presented in table on page. Antenna distance (Y) to test board GP was changed. Also antenna grounding effect to antenna's electrical characteristics was investigated (see page 7).

W3554 Typical Total Efficiencies in %

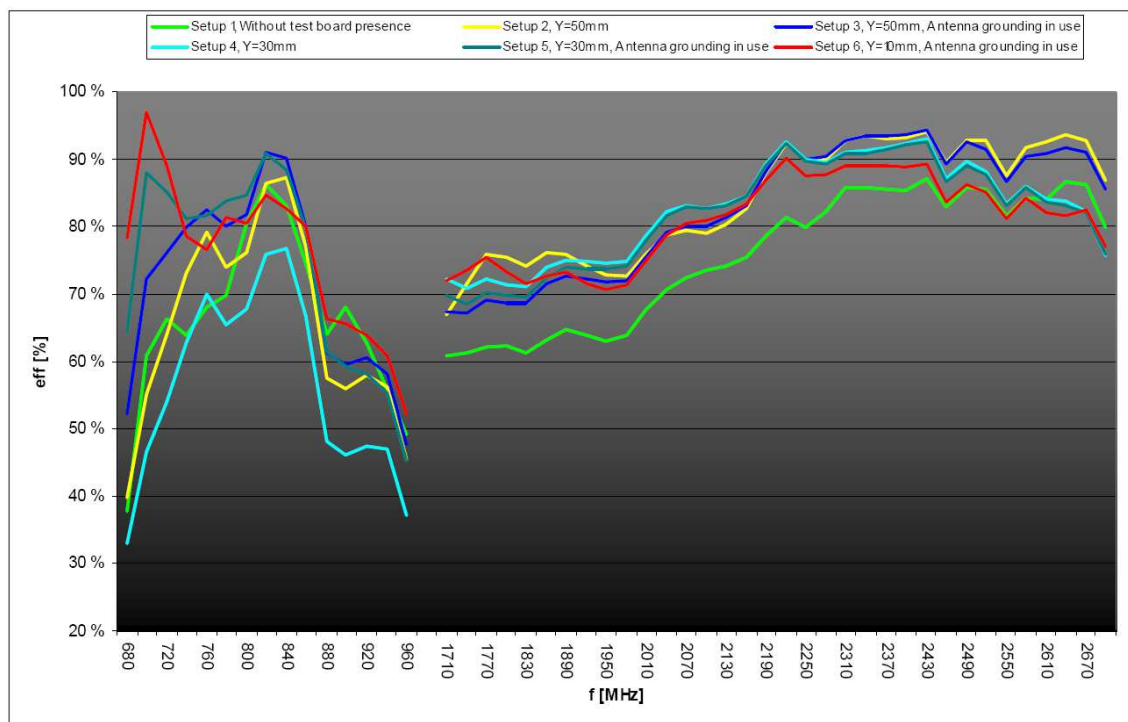


Antenna was measured in Free Space Environment (FS) without test board presence (see page 6).

W3554 Typical Total Efficiencies in dB

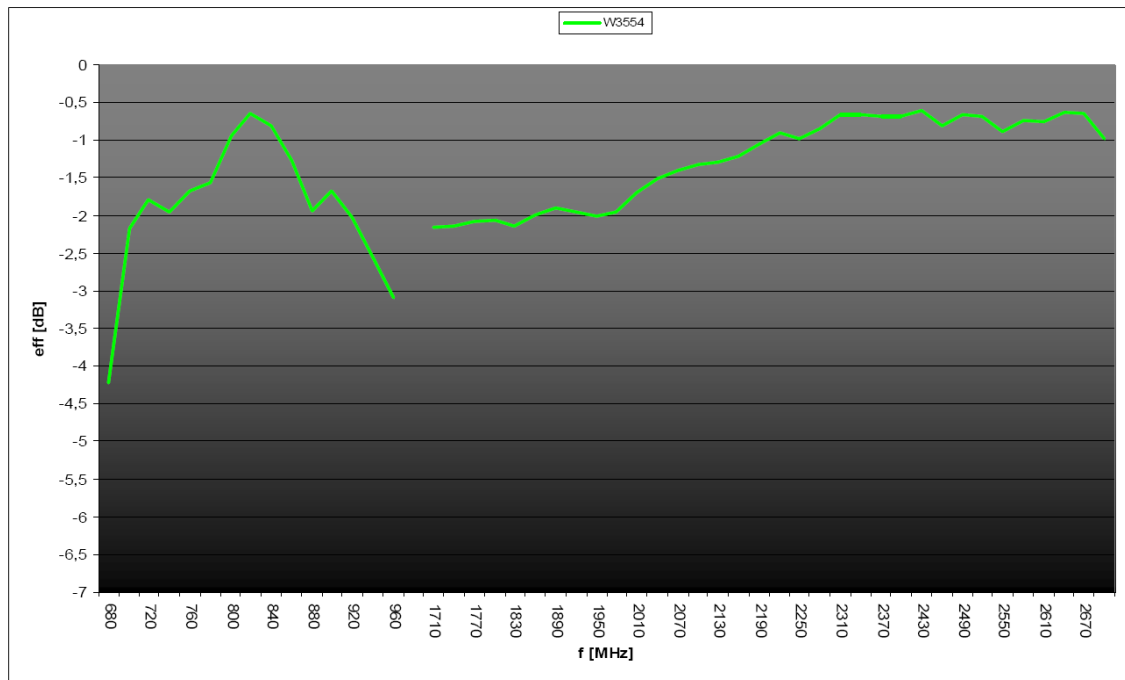

Antenna was tested totally with 6 different measurement setups as presented in table on page. Antenna distance (Y) to test board GP was changed. Also antenna grounding effect to antenna's electrical characteristics was investigated (see page 7).

W3554 Typical Total Efficiencies in dB

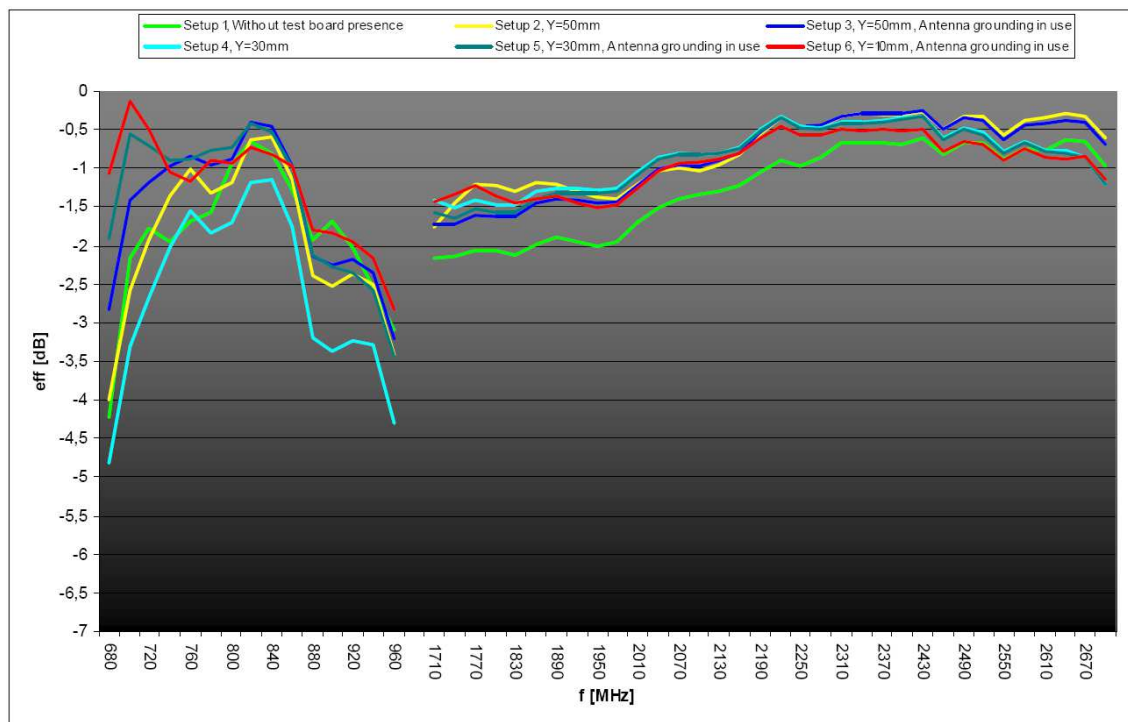

For More Information, please contact:

Pulse Finland Oy

Takatie 6

90440 Kempele

Finland

Tel. +358 207 935 500

Fax +358 207 935 501

Domicile: Kempele

Business ID: 1933992-8

antennasales.europe@pulseelectronics.com

www.pulseelectronics.com

This is a "Preliminary" product application notes. Products mentioned on this application notes are in development and in the process of being qualified. These products are not fully released nor are they in production. Features, specifications and performance of products offered are subject to change without notice. Other brand and product names mentioned herein may be products and/or registered trademarks of their respective ones. For current info on this product, please contact the Pulse San Diego office.

© Copyright, 2011. Pulse Finland Oy. All rights reserved.