



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



pin-locator
1882-24008
attached




Operating instructions

- Please remove support while using pin-locator
- Pin locator must be tight screwed on wire-anvil
- Please mount support while using socket-locator
- Adjust fixing of socket-locator to assure its gliding functionality

Ausführung: Workmanship:

- Leichte Handhabung
Easy handling
- Linearer Hub
Straight action principle
- Entriegelbare Zwangssperre
Ratchet release
- Kontaktpositionierung mit Klapppositionierer
Contact positioning with flap locator
- Präzise geschliffene Profile
Precisely ground profiles
- Oberfläche brüniert
Burnished surface
- Ergonomisch geformte Soft-Handgriffe
Farbe: Türkisgrün (ähnl. RAL 6016)
Ergonomically formed soft-grips
Colour: green similar (similar RAL 6016)
- Voll recyclefähig;
RoHS(Richtlinie.2002/95/EG) konform
Fully recyclable;
RoHS(Directive.2002/95/EG) compliant

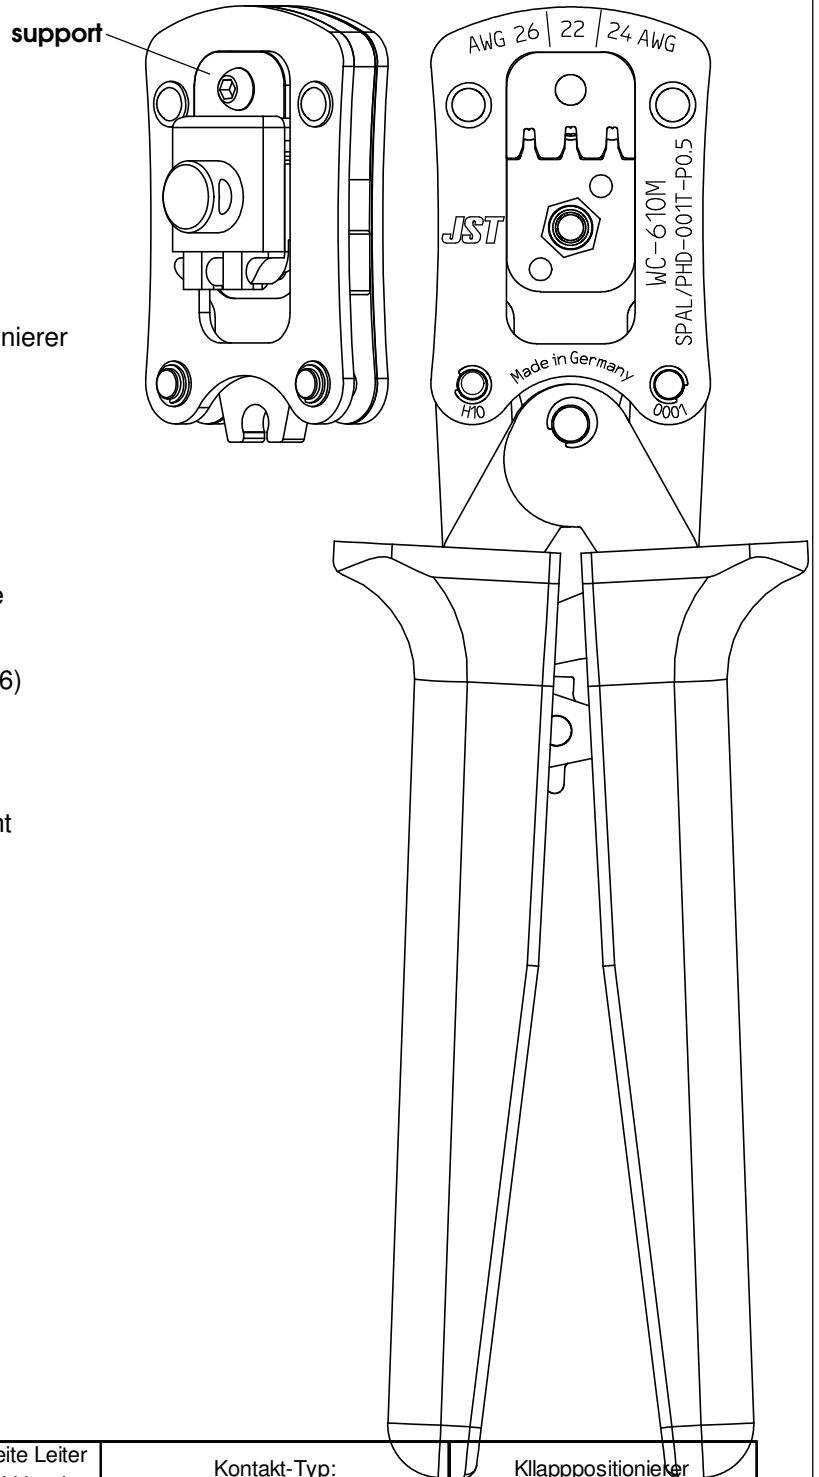

Abmessungen: Dimensions:

- Länge: ca. 195 mm
Length: approx. 195 mm
- Breite: ca. 63 mm
Width: approx. 63 mm
- Gewicht: ca. 290 g
Weight: approx. 290 g

Bedienhinweis auf Rückseite
Operating instructions see overleaf

Anwendungsbereich: Application range:

Leiterquerschnitt Cross section range	Crimphöhe Leiter Crimp height wire ±0,05	Crimpbreite Leiter Crimp width wire Ref	Kontakt-Typ: Contact Type:	Klapppositionierer flap locator
AWG 26	0,65	1,38	SPHD-001T-P0.5 Buchse/Socket SPAL-001T-P0.5 Stift/Pin	1182-24005 Buchse/Socket 1182-24008 Stift/Pin
AWG 22	0,75			
AWG 24	0,7			