



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



INVERTER FOR CCFL LAMP

● Part NO: WICCFL1

Input DC	5V ± 10%
Normal operating Volt	650Vrms
Input Current	0.45A MAX
Frequency	37.0 KHz ± 5%
Operating Temp	-10° C ~ 80° C
Operating Temp	-20° C ~ 85° C

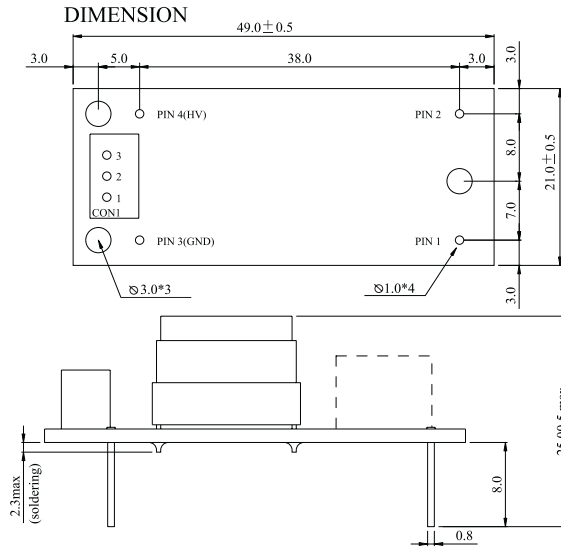

INPUT CONNECTOR

PIN NUMBER	FUNCTION
PIN 1	V+
PIN 2	GND

OUTPUT(CON1) CONNECTOR 2532-03


PIN NUMBER	FUNCTION
1	GND
2	NC
3	HV

The non-specified tolerance of dimension is ±0.3mm

UNIT: mm

● Part NO: WICCFL2

Input DC	12V ± 10%
Normal operating Volt	750Vrms
Input Current	0.30A MAX
Frequency	37.0 KHz ± 5%
Operating Temp	-10° C ~ 80° C
Operating Temp	-20° C ~ 85° C

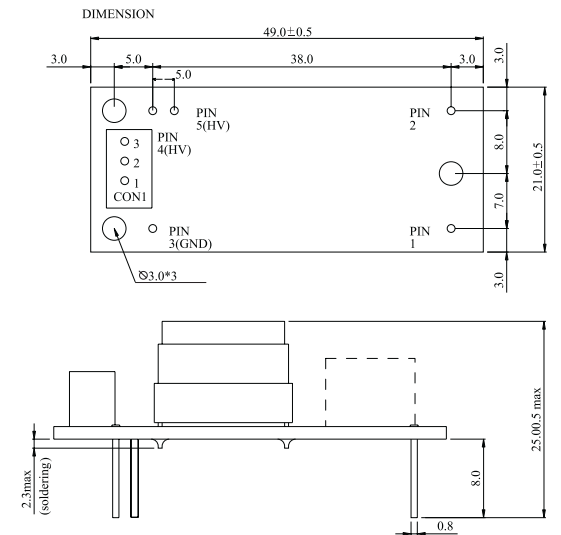

INPUT CONNECTOR

PIN NUMBER	FUNCTION
PIN 1	VIN
PIN 2	GND

OUTPUT(CON1) CONNECTOR 2532-03

PIN NUMBER	FUNCTION
1	GND
2	NC
3	HV


The non-specified tolerance of dimension is ±0.3mm

UNIT: mm

INVERTER FOR
CCFL LAMP

● Part NO: WICCFL3

Input DC	5V ± 10%
Normal operating Volt	750Vrms
Input Current	0.32A MAX
Frequency	45.0 KHz ± 5%
Operating Temp	-10° C ~ 80° C
Operating Temp	-20° C ~ 85° C

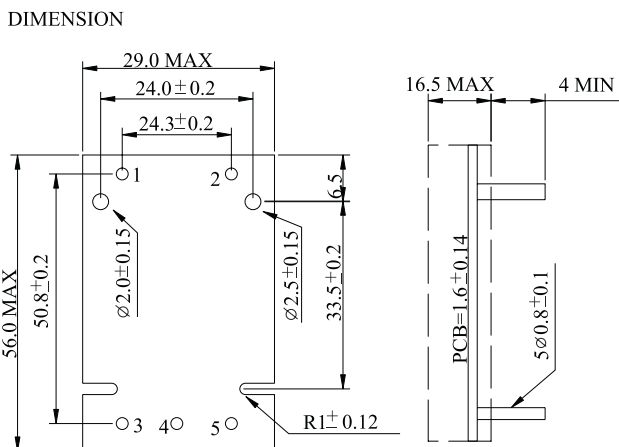

PIN ASSIGNMENT

PIN NUMBER	FUNCTION
1	+VIN
2	GND
3	Iout1
4	Iout2
5	Iout-return

The non-specified tolerance of dimension is ±0.3mm

UNIT: mm