



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



INVERTER FOR CCFL LAMP

● Part NO: WICCFL4

Input DC	5V ± 10%
Normal operating Volt	950Vrms
Input Current	0.35A MAX
Frequency	38.0 KHz ± 5%
Operating Temp	-10°C ~ 80°C
Operating Temp	-20°C ~ 85°C

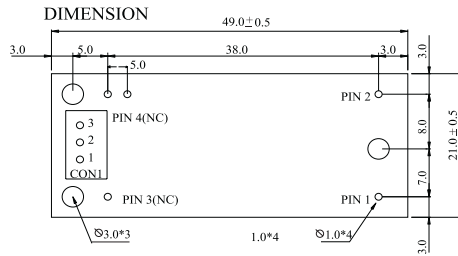


INPUT CONNECTOR

PIN NUMBER	FUNCTION
PIN 1	VIN
PIN 2	GND

OUTPUT(CON1) CONNECTOR 2532-03

PIN NUMBER	FUNCTION
1	NC
2	NC
3	X

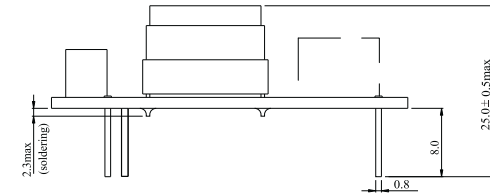


PIN ASSIGNMENT

UNIT: mm

The non-specified tolerance of dimension is ±0.3mm

● Part NO: WICCFL5

Input DC	12V ± 10%
Normal operating Volt	850Vrms
Input Current	0.35A MAX
Frequency	38.0 KHz ± 5%
Operating Temp	-10°C ~ 80°C
Operating Temp	-20°C ~ 85°C

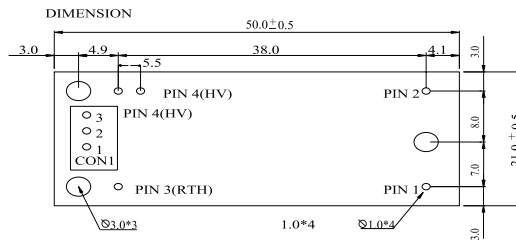


INPUT CONNECTOR

PIN NUMBER	FUNCTION
PIN 1	VIN
PIN 2	GND

OUTPUT(CON1) CONNECTOR 2532-03

PIN NUMBER	FUNCTION
1	RTH
2	NC
3	HV

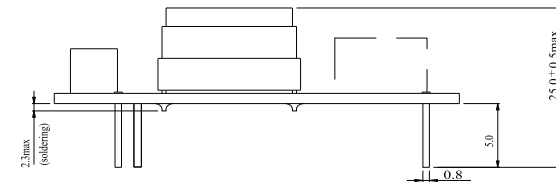


UNIT: mm

The non-specified tolerance of dimension is ±0.3mm

INVERTER FOR CCFL LAMP

● Part NO: WICCFL6

Input DC	5V ± 10%
Normal operating Volt	1000Vrms
Input Current	0.41A MAX
Frequency	34.0 KHz ± 5%
Operating Temp	-10°C ~ 80°C
Operating Temp	-20°C ~ 85°C

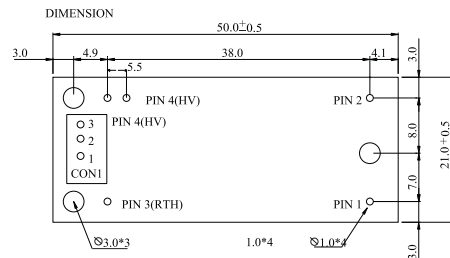


INPUT CONNECTOR

PIN NUMBER	FUNCTION
PIN 1	VIN
PIN 2	GND

OUTPUT(CON1) CONNECTOR 2532-03

PIN NUMBER	FUNCTION
1	RTH
2	NC
3	HV

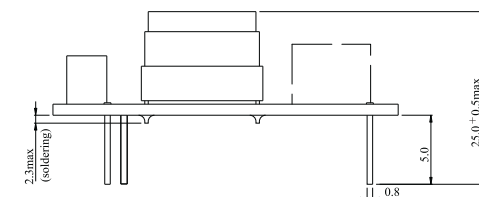

PIN ASSIGNMENT

UNIT: mm

The non-specified tolerance of dimension is ±0.3mm