



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



1480/1550(1585)NM WDM/ TAP COUPER/ ISOLATOR HYBRID COMBINATION

WTIH1514 Series

Product Description

Oplink's WTIH is a combination of a wavelength division multiplexer, tap coupler and an isolator in a compact package. This product has an extremely low insertion loss, and a very stable tap-coupling ratio. Fiber optic amplification is the ideal application for this product.

Oplink can provide customized designs to meet specialized feature applications. Also, Oplink offers modular assemblies that integrate other components to form a full function module or subsystem.



Performance Specification

WTIH1514 Series		Single Stage	Dual Stage	Unit
Operating Wavelength Range	Signal Channel	C band : 1528 ~ 1564 L band : 1570 ~ 1605		nm
	Pump Channel	1450 ~ 1495		nm
Insertion Loss ^[1]	Signal Port	< 1.1	< 1.2	dB
	Pump Port	< 0.6		
	Tap Port	1% Tap Ratio	19.2 ~ 21.0	dB
		2% Tap Ratio	16.2 ~ 18.0	
		5% Tap Ratio	12.2 ~ 14.0	
10% Tap Ratio		9.6 ~ 10.8		
Wavelength Dependent Loss	Signal to Common	< 0.4	< 0.5	dB
Wavelength Isolation	Signal to Common @ Pump Wavelength Range	> 25		dB
	Pump to Common @ Signal Wavelength Range	> 15		
Reverse Direction Isolation (over signal wavelength range, 0~70°C, all SOP)	Common to Signal	> 21	> 36	dB
Polarization Dependent Loss		< 0.1	< 0.2	dB
Polarization Mode Dispersion (standard)		< 0.25	< 0.05	ps
Directivity		≥ 55		dB
Return Loss		≥ 50		dB
Maximun Power Handling		≤ 500		mW
Operating Temperature		0 to +70		°C
Storage Temperature		-40 to +85		°C
Fiber Type	Signal & Tap Ports	Corning SMF-28		
	Common & Pump Ports	Corning HI1060 FLEX		
Package Dimension ^[3]		P2 : (Ø) 5.5 x (L) 40.0		mm

Features

- ◆ Wide Operating Wavelength Range
- ◆ Compact Size
- ◆ High Isolation
- ◆ Ultra Low PDL & PMD
- ◆ High Stability & Reliability
- ◆ Epoxy-free Optical Path

Applications

- ◆ Fiberoptic Amplifiers
- ◆ CATV Fiberoptic Links
- ◆ WDM Systems
- ◆ Fiberoptic Instruments
- ◆ Transmitters and Fiber Lasers
- ◆ Laboratory R&D



Values are referenced without connector loss

^[1] The maximum IL is under all states of polarization and within the full operating temperature and wavelength ranges specified. Add 0.3dB on signal port IL for 10% tapping case.

^[2] All the parameters are excluding connectors.

^[3] The mechanical tolerance should be +/-0.2mm on all package dimensions unless otherwise custom specified.

Mechanical Drawing / Package Dimensions (dimension in mm)

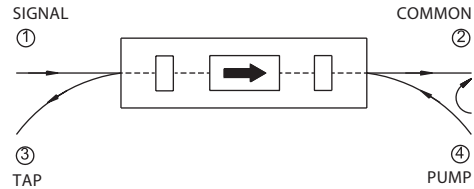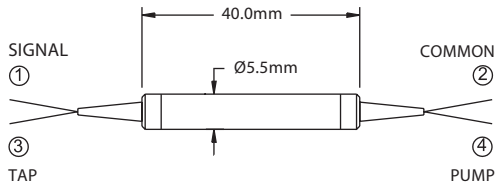

Ordering Information

Oplink can provide a remarkable range of customized optical solutions. For detail, please contact Oplink's OEM design team or account manager for your requirements and ordering information (510) 933-7200.

