



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





J1708/J1939 TO  
WI-FI ADAPTER



# WIRELESS VEHICLE BUS ADAPTER

Wireless adapter installs in minutes without cab-cluttering cables to give Transportation Solution Providers access to vehicle bus data

Digi's Wireless Vehicle Bus Adapter (WVA) is a rugged, compact plug-in device that provides easy access to vehicle data via standard Wi-Fi and web services. The WVA installs in minutes by connecting directly into the diagnostic port of the vehicle. Support for J1708 and J1939 standards allows the WVA to work with almost any fleet vehicle on the road today.

The WVA enables Transportation Solution Providers to reduce their development costs, have fastest time to market and expand their solution offering. Low-cost hardware plus a zero dollar installation cost allows TSPs to target medium and


small fleets with their solution; something that has been cost prohibitive until now.

A web services API accelerates integration with existing applications. Vehicle data can be read, subscribed to, or have programmed alert levels. The WVA handles the J1708/J1939 protocols and delivers only the vehicle data your application needs. The WVA stays up-to-date with the latest J1939 standards, meaning an application does not need to change when the standard changes.


## BENEFITS

- On-board J1939/J1708 message processing simplifies integration with applications
- Less than 5 minutes to install, uninstall or replace
- No cabling, no cluttering of the cab
- Supports emerging mobile devices: Android and iOS smartphones, tablets and OBCs
- Power management to minimize drain on vehicle battery
- Open architecture based on industry standards: Linux, REST APIs, Wi-Fi 802.11
- 3-year warranty on hardware
- Best-in-class tech support and integration services

## APPLICATION EXAMPLE

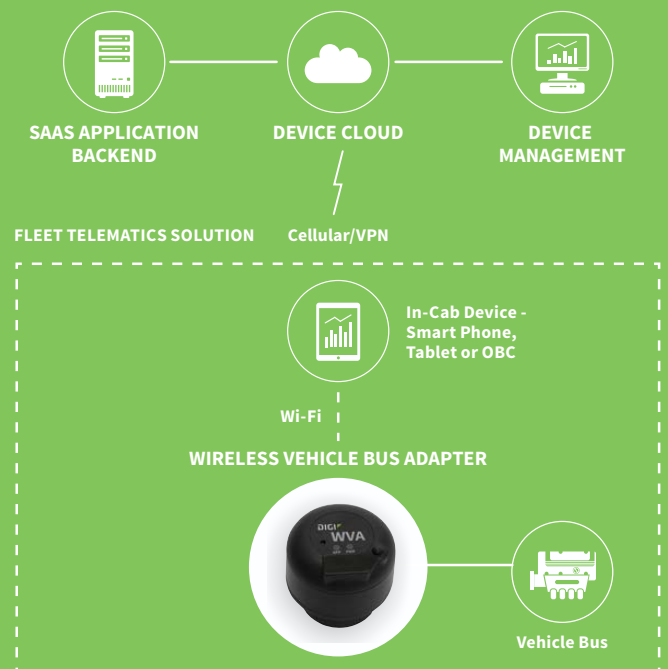

## RELATED PRODUCTS

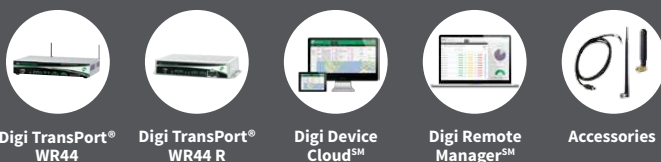

## SPECIFICATIONS

## Wireless Vehicle Bus Adapter

GENERAL	
MANAGEMENT	WebUI, Digi Device Cloud
SOFTWARE	REST web services
OPERATING SYSTEM	Linux
SECURITY	HTTPS, WPA2, Admin password
MEMORY	Total: 128 MB Flash, 64 MB RAM; Available user space: 20 MB Flash
LEDS	Power, SW defined
ANTENNA	Internal
MECHANICAL	
DEVICE CONNECTOR	9-Pin Deutsch
DIMENSIONS (HEIGHT X DIAMETER)	2.33 in x 2.15 in (5.9 cm x 5.5 cm)
WEIGHT	0.26 lb (0.12 kg)
WI-FI	
802.11	b/g/n
DATA RATE	Up to 72.2 Mbps
TRANSMIT POWER	1 MB: 12.5 dBm; 54 MB: 12.25 dBm; 65 MB: 9.25 dBm
RECEIVER SENSITIVITY	1 MB: -91 dBm; 54 MB: -75 dBm; 65 MB: -71 dBm
MODES	Access Point, Client and Dual Modes
WI-FI SECURITY	WPA2
INTERFACES	
USB	Type A; Host mode only
BUZZER	Yes; SW defined
ACCELEROMETER	3 Axis (2/4/8g selectable)
VEHICLE BUS	Dual J1939 (CAN) and J1708
CAN BAUD RATES	Up to 500 kbps
POWER REQUIREMENTS	
POWER INPUT/POWER SUPPLY	9-36 VDC
POWER CONSUMPTION	Peak: 2.5 W, Idle: 1.5 W, Sleep 30 mW
ENVIRONMENTAL/REGULATORY APPROVALS	
NEMA	IP54
OPERATING TEMPERATURE	-40° C to +70° C (-40° F to +158° F)
STORAGE TEMPERATURE	-40° C to +85° C (-40° F to +185° F)
SAFETY	UL 60950-1, EN 60950-1, CSA 22.2 No. 60950
EMC	FCC part 15 subpart C section 15.247, CISPR25, EN55022, EN55024, Industry Canada RSS210 Issue 8, CISPR 22
AUTOMOTIVE	ISO-10452, ISO-10605, SAE 1455, ISO 7637, J1113-2

## PART NUMBERS

## DESCRIPTION

WVA-J200	Wireless Vehicle Bus Adapter (WVA), Wi-Fi, Telematics Version
WVA-J200-10	Wireless Vehicle Bus Adapter (WVA), Wi-Fi, Telematics Version, 10 Unit Bulk Pack

WVA is not certified for use in Europe

**DIGI SERVICE AND SUPPORT** / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2016 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

91002422  
B3/616

**DIGI INTERNATIONAL WORLDWIDE HQ**  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

**DIGI INTERNATIONAL FRANCE**  
+33-1-55-61-98-98 / [www.digi.fr](http://www.digi.fr)

**DIGI INTERNATIONAL JAPAN**  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

**DIGI INTERNATIONAL SINGAPORE**  
+65-6213-5380

**DIGI INTERNATIONAL CHINA**  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

