



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



10/100 BASE – TX SINGLE PORT TRANSFORMER MODULES

Ruggedized



- 10K VAC for 60 second
- 350uH OCL with 8mA DC
- Operating Temperature: -40°C to +85°C
- Storage Temperature: -55°C to +125°C
- Pure tin finish
- Withstands 245°C Max Reflow Temperature
- MSL: 3
- Pure Tin
- RoHS6

Electrical Specifications 25°C — Operating Temperature -40°C to +130°C




Part Number	Insertion Loss (dB MAX)				Return Loss (dB MIN)						Crosstalk (dB MIN)				Differential to Common Mode Rejection (dB MIN)			
	0.1-30MHz	60MHz	80MHz	100MHz	5MHz	30MHz	50MHz	60MHz	80MHz	100MHz	1MHz	30MHz	60MHz	100MHz	30MHz	60MHz	100MHz	200MHz
X-1644F	-1	-2	-2.5	-3.5	-18	-9	-6	-5	-3	-2	-45	-30	-27	-25	-36	-32	-30	-25

Notes: 1. Add suffix NL for RoHS compliant part; i.e. X-1644FNL 2. For Tape&Reel Packaging, add "T" suffix at the end of the part number; i.e. X-1644FT

Mechanical

Schematic

X-1644F

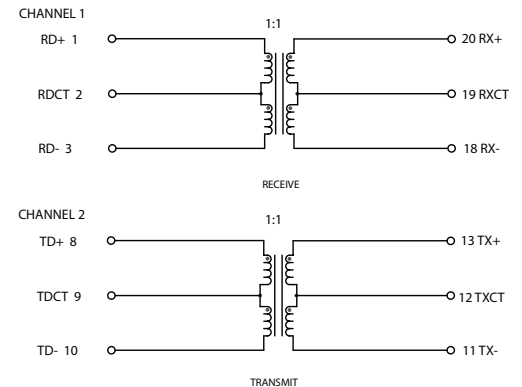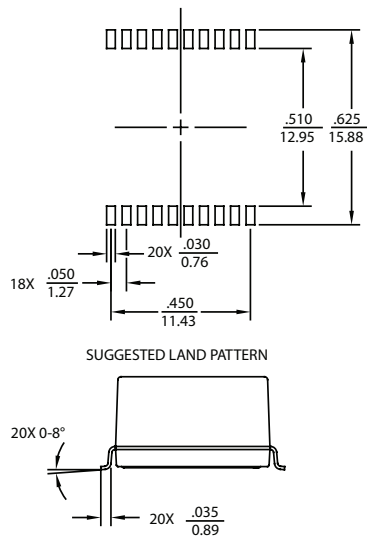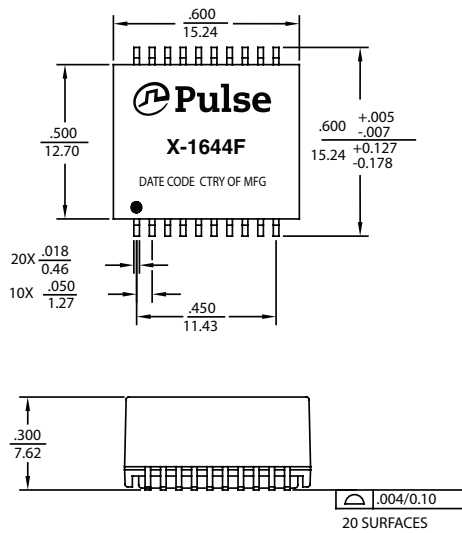

Weight2.6 grams
 Tube 20/tube
 Tape & Reel 300/reel

Dimensions: Inches
 mm
 Unless otherwise specified, all tolerances are 3 .010
 0,25

For More Information

Corporate Headquarters

PulseR, LLC

Two Pearl Buck Court
 Bristol, PA 19007
 U.S.A.

Tel: 215 781 6400

Fax: 215 781 6403

For Global Sales Representatives and Locations

Visit: <http://www.pulseruggedized.com>

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2018.PulseR, LLC. All rights reserved.