



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





CUSTOMIZABLE
COMMERCIAL-GRADE
3G ROUTING GATEWAYS



CONNECTPORT® X4 FAMILY

Remote M2M device networking gateways designed for commercial grade and rugged outdoor applications

ConnectPort X4 customizable 3G cellular M2M routing gateways offer a variety of LAN/WAN interface options for end-to-end networking of remote devices. The gateways include comprehensive IP protocols and IPSec VPN support for high-end routing and security. The easy DIA/Python development environment enables custom applications to run locally while interfacing across cellular networks for WAN connectivity to a centralized server.

ConnectPort X4 gateways feature a compact commercial grade enclosure or an optional outdoors IP66/NEMA 4X enclosure with Class 1, Division 2 rating for more rugged applications.


Interface options include Ethernet, serial and ZigBee/RF for flexible connectivity to virtually any remote device.

All ConnectPort X4 gateways feature an end-to-end development environment using comprehensive Digi ESP™ IDE and DIA/Python programming languages. Digi Device Cloud™ add secure, scalable cloud based management and web services integration for a complete remote asset platform.

BENEFITS

- WAN connectivity via 3G HSPA+/CDMA networks
- Flexible interfaces: ZigBee/802.15.4, software selectable RS-232/422/485 serial and USB and 2 AIO/2 DIO
- Small commercial grade enclosure or NEMA 4X/IP66 case with Class 1, Division 2 certifications
- Full routing/IP filtering plus IPsec/SSL VPNs with DES, 3DES or AES encryption
- Easy development environment via DIA and Python scripting as part of Digi ESP IDE
- Support for Modbus/Modbus TCP
- Digi Device Cloud support for secure, scalable access to an unlimited number of remote assets

APPLICATION EXAMPLE

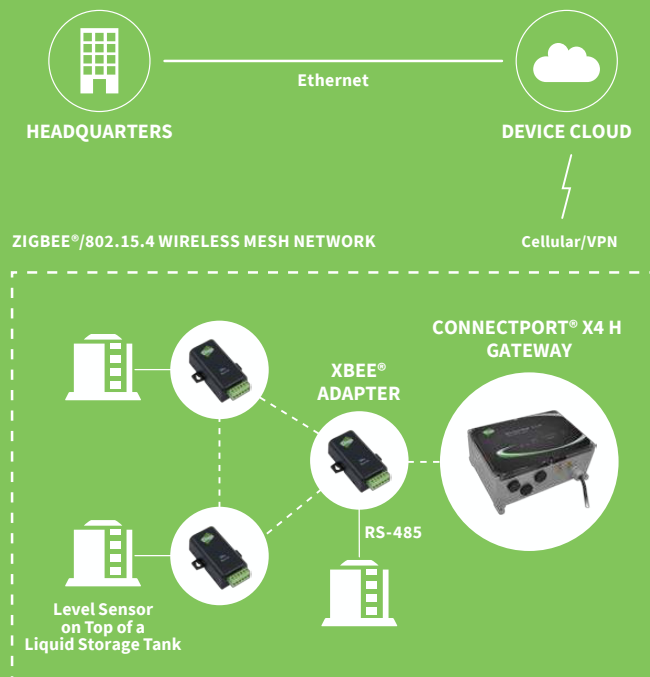

RELATED PRODUCTS



ConnectPort® X2



XBee® ZigBee Gateway



Digi Connect® WAN



Digi TransPort® WR11



Digi TransPort® WR21

SPECIFICATIONS

ConnectPort® X4

| ConnectPort® X4 IA

| ConnectPort® X4 H

WIRELESS INTERFACES

WWAN**

HSPA+ (U9)	850/900/1700 (AWS)/1900/2100 MHz; Transfer rate (max): 5.76 Mbps up, 21 Mbps down	
CDMA 1XRTT (BX)	800/1900 MHz; Transfer rate (max): 153 Kbps up/down	
CONNECTOR	1 or 2 x SMA (Center pin - on device: female; on antenna: male)	1 x SMA (Center pin - on device: female; on antenna: male)
SIM SLOTS	2 or 0 (CDMA variants)	1
SIM SECURITY	SIM slot cover plate	Internal SIM slot

RF

STANDARD	ZigBee (2.4 GHz), DigiMesh® (2.4 GHz or 900 MHz), XBee-PRO® 900HP, 802.15.4 or 868	
CONNECTOR	1 x RP-SMA (Center pin - on device: male; on antenna: female)	

OTHER

SATELLITE	N/A	
GPS	N/A	
WI-FI	N/A	

WIRED INTERFACES

SERIAL

PORTS	1	
STANDARD	RS-232	RS-232/422/485 (Software selectable)
DTE/DCE	DTE	
SIGNAL SUPPORT	TXD, RXD, RTS, CTS, DTR, DSR and DCD	
FLOW CONTROL	Hardware and software flow control	
COM PORT REDIRECTOR	RealPort®	
THROUGHPUT	Up to 230 Kbps	
CONNECTOR	DB-9 Male	Screw-down terminal block

ETHERNET

PORTS	1	
STANDARD	IEEE 802.3	
PHYSICAL LAYER	10/100Base-T	
DATA RATE	10/100 Mbps (auto-sensing)	
MODE	Full or Half duplex (auto-sensing)	
INTERFACE	Auto MDI/MDIX	
CONNECTOR	RJ-45	

I/O

PORTS	N/A	2 analog and 2 digital
CONNECTOR	N/A	Screw-down terminal block

USB

PORTS	1	
STANDARD	USB 1.1	
SIGNALING	Full-speed	
CONNECTOR	Type A	

OTHER

SENSOR	N/A	1 sensor port for use with Watchport® sensors	N/A
---------------	-----	---	-----

SOFTWARE/MANAGEMENT

MANAGEMENT (CLOUD-BASED)	Digi Device Cloud SM		
MANAGEMENT (LOCAL)	Web Interface via HTTP/HTTPS, Password access control, IP service port control; CLI via serial port, Telnet, Python scripting; Digi SureLink™ "always-on" connection		
SECURITY	SSL tunnels, SSHv2, FIPS 197 (IPsec, HTTPS)		

SPECIFICATIONS

ConnectPort® X4

| ConnectPort® X4 IA

| ConnectPort® X4 H

SOFTWARE/MANAGEMENT (CONTINUED)

NETWORK PROTOCOLS	UDP/TCP, DHCP, SNMPv1/v2
VPN	IPsec with IKE/ISAKMP; Multiple tunnel support; DES, 3DES and up to 256-bit AES encryption; VPN pass-through, GRE forwarding; Simple Certificate Enrollment Protocol (SCEP) for X.509 certificate
ROUTING	NAT, NAT-T (NAT traversal) VPN tunneling, Port forwarding, VPN/GRE pass-through; Access control lists (IP filtering), IP pass-through, Virtual Router Redundancy Protocol (VRRP) per RFC 3768
INDUSTRIAL PROTOCOL SUPPORT	Modbus bridge enables Modbus serial to Modbus/TCP conversion; Integrated Python code allows gateway to act as Modbus client/master or Modbus server/slave; Functions like an Ethernet to serial bridge, but uses XBee to transport serial data; Handles unique timing issues per Modbus protocol rules; Uses Modbus Unit ID to look up IP or mesh MAC address.
REAL-TIME CLOCK	Yes
MEMORY	16 MB Flash, 32 MB RAM

POWER

INPUT	6-30 VDC	100-240 VAC
CONSUMPTION	Idle: 1.5 W, Max: 10.4 W	Approx. 15 W
PROTECTION	4 kV burst (EFT) per-4-4, 2 kV surge per EN61000-4	2 kV burst (EFT) (with included power supply)
CONNECTOR	Locking barrel	Compression terminal block
DC POWER CORD*	Available upon request	N/A
AC POWER SUPPLY*	12 VDC power supply for 0° C to 40° C (32° F to 104° F) included; Extended temperature power supply available separately	Internal
BATTERY BACKUP	N/A	

PHYSICAL

DIMENSIONS (L X W X H)	5.25 in x 3.35 in x 1.00 in (13.33 cm x 8.50 cm x 2.54 cm)	9.50 in x 6.25 in x 3.75 in (240 mm x 160 mm x 95 mm)
WEIGHT	0.44 lb (0.20 kg)	3.10 lb (1.41 kg)
STATUS LEDS	Ethernet status, Power, Cellular link/activity, Signal strength (4 bars), XBee link/activity	Ethernet status, Power, Cellular link/activity, Signal strength (5 bars), XBee® link/activity
ENCLOSURE MATERIAL	Industrial (metal)	NEMA 4X
ENCLOSURE RATING	N/A	IP66
MOUNTING	Wall-mount bracket sold separately	DIN rail bracket included
		4x mounting feet on the unit's flange

ENVIRONMENTAL

OPERATING TEMPERATURE ***	-30° C to +75° C (-22 F to +167 F)	
STORAGE TEMPERATURE	-40 to +85C	
RELATIVE HUMIDITY	5% to 95% (non-condensing)	N/A (enclosure is water-tight)
ETHERNET ISOLATION	1500 VAC min per IEEE 802.3/ANSI X3.263	
SERIAL PORT PROTECTION (ESD)	+15 kV Air Gap and +8 kV contact discharge per IEC 1000-4-2	
HAZARDOUS (CLASS 1 DIV 2)	No	Yes
CONFORMAL COATING	N/A	

APPROVALS

GSM/UMTS	PTCRB, NAPRD.03, GCF-CC, R&TTE, EN 301 511
CDMA/EV-DO	CDG, TIA/EIA-690, TIA/EIA-98-E
CELLULAR CARRIERS	Certified by most major carriers. See www.digi.com for current listing.
SAFETY	UL 60950, CSA 22.2 No. 60950, EN60950; Class 1 Div 2 (IA model only)
EMISSIONS/IMMUNITY	CE, FCC Part 15 (Class A), AS/NZS CISPR 22, EN55024, EN55022, Class A

WARRANTY

PRODUCT WARRANTY	5 years
-------------------------	---------

* Optional hardware

** Transfer rates are network operator dependent

*** Reduced cellular performance may occur above +60° C. Standard Temperature power supplies may reduce temperature range.

PART NUMBERS	DESCRIPTION
ConnectPort X4 - ZigBee	
X4-Z11-E-A	ConnectPort X4 - XBee ZigBee to Ethernet
X4-Z11-E-W	ConnectPort X4 - XBee ZigBee to Ethernet (International)
X4-Z1J-U901-W	ConnectPort X4 - XBee ZigBee to Ethernet & Cellular (HSPA+) (International)
X4-Z1U-B101-A	ConnectPort X4 - XBee ZigBee to Ethernet & Cellular (1xRTT Sprint)
X4-Z1U-B201-A	ConnectPort X4 - XBee ZigBee to Ethernet & Cellular (1xRTT Verizon)
X4-Z1U-U901-A	ConnectPort X4 - XBee ZigBee to Ethernet & Cellular (HSPA+)
ConnectPort X4 - DIGIMESH 2.4 GHZ	
X4-M11-B201-A	ConnectPort X4 - XBee (DigiMesh 2.4 GHz) to Ethernet & Cellular (1xRTT Verizon)
X4-M11-E-A	ConnectPort X4 - XBee (DigiMesh 2.4 GHz) to Ethernet
X4-M11-E-W	ConnectPort X4 - XBee (DigiMesh 2.4 GHz) to Ethernet (International)
X4-M11-U901-W	ConnectPort X4 - XBee (DigiMesh 2.4 GHz) to Ethernet & Cellular (HSPA+) (International)
ConnectPort X4 - 802.15.4	
X4-A11-E-A	ConnectPort X4 - XBee (802.15.4) to Ethernet
X4-A11-E-W	ConnectPort X4 - XBee (802.15.4) to Ethernet (International)
X4-A1J-U901-W	ConnectPort X4 - XBee (802.15.4) to Ethernet & Cellular (HSPA+) (International)
X4-A1U-U901-A	ConnectPort X4 - XBee (802.15.4) to Ethernet & Cellular (HSPA+)
ConnectPort X4 - 868 MHZ	
X4-P8J-U901-W	ConnectPort X4 - XBee (XBee 868LP) to Ethernet & Cellular (HSPA+) (International)
ConnectPort X4 - 900 MHZ	
X4-HMU-B201-A	ConnectPort X4 - XBee (XBee-PRO 900HP) to Ethernet & Cellular (1xRTT Verizon)
X4-HMU-E-A	ConnectPort X4 - XBee (XBee-PRO 900HP) to Ethernet
X4-HMU-U901-A	ConnectPort X4 - XBee (XBee-PRO 900HP) to Ethernet & Cellular (HSPA+)
X4-HMA-U901-AU	ConnectPort X4 - XBee (XBee-PRO 900HP) to Ethernet & Cellular (HSPA+) (Australia)
ConnectPort X4 H - ZigBee	
X4H-Z1U-B101-US	ConnectPort X4 H - XBee ZigBee S2B to Ethernet & Cellular (1xRTT Sprint)
X4H-Z1U-B201-US	ConnectPort X4 H - XBee ZigBee S2B to Ethernet & Cellular (1xRTT Verizon)
X4H-Z1U-U901-US	ConnectPort X4 H - XBee ZigBee S2B to Ethernet & Cellular (HSPA+)
ConnectPort X4 H - 900 MHZ	
X4H-HMU-U901-US	ConnectPort X4 H - XBee (XBee-PRO 900HP) to Ethernet & Cellular (HSPA+)
ConnectPort X4 IA - ZigBee	
X4-Z11-PE-A	ConnectPort X4 IA - XBee ZigBee to Ethernet
X4-Z11-PE-W	ConnectPort X4 IA - XBee ZigBee to Ethernet (International)
X4-Z1J-U905	ConnectPort X4 IA - XBee ZigBee to Ethernet & Cellular (HSPA+) (International)
X4-Z1U-B105	ConnectPort X4 IA - XBee ZigBee to Ethernet & Cellular (1xRTT Sprint)
X4-Z1U-B205	ConnectPort X4 IA - XBee ZigBee to Ethernet & Cellular (1xRTT Verizon)
X4-Z1U-U905	ConnectPort X4 IA - XBee ZigBee to Ethernet & Cellular (HSPA+)
ConnectPort X4 IA - 802.15.4	
X4-A1J-U905	ConnectPort X4 IA - XBee (802.15.4) to Ethernet & Cellular (HSPA+) (International)
X4-A1U-U905	ConnectPort X4 IA - XBee (802.15.4) to Ethernet & Cellular (HSPA+)
ConnectPort X4 IA - 868 MHZ	
X4-P8J-U905	ConnectPort X4 IA - XBee (XBee 868LP) to Ethernet & Cellular (HSPA+) (International)

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2016 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001460
E3/616

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

