



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





MESH NETWORKING
EMBEDDED RF
MODULES FOR OEMS



XBEE® DIGIMESH® 2.4

Embedded RF modules deliver wireless connectivity using the innovative and easy-to-deploy DigiMesh protocol

XBee and XBee-PRO DigiMesh 2.4 embedded RF modules provide wireless connectivity to electronic devices using a globally deployable 2.4 GHz transceiver. These modules use the DigiMesh networking protocol. This innovative, peer-to-peer mesh network offers users added network stability through self-healing, dense network operation and support for sleeping routers, extending the operational life of battery dependent networks.

XBee modules are ideal for low-power applications. XBee-PRO modules are power-amplified versions of XBee modules for extended-range applications. Products in the XBee family are easy to use, share a common hardware


footprint, and are fully interoperable with other XBee products utilizing the same technology. They are available in a variety of different protocols to suit different applications, enabling users to substitute one XBee module for another with minimal development time and risk.

Digi's unsurpassed offering of XBee products provide users with seamless communication between devices. XBee adapters deliver wireless connectivity to electronic devices in wired networks. ConnectPort® X gateways enable users to access and configure remote devices in a network.


BENEFITS

- No configuration needed for out-of-the-box RF communications
- Common XBee footprint for a variety of RF modules
- Simple topology to deploy and grow
- 2.4 GHz for worldwide deployment
- Low-power XBee or extended-range XBee-PRO (pin/over-the-air compatible)
- Multiple antenna options
- Outdoor RF line-of-sight range up to 1 mile (1.6 km) with high-gain antennas
- DigiMesh peer-to-peer mesh networking protocol
 - Self-healing and discovery for network stability
 - Sleeping routers supported for long battery life

RELATED PRODUCTS

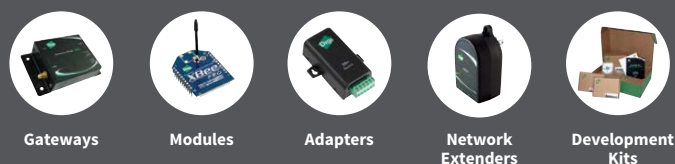

APPLICATION EXAMPLE

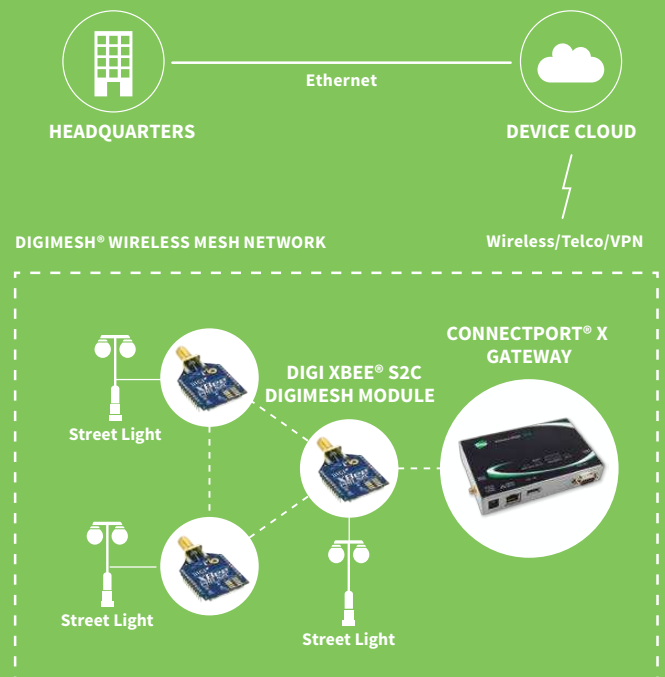

SPECIFICATIONS

Legacy XBee DigiMesh® 2.4

Legacy XBee-PRO DigiMesh® 2.4

Legacy XBee-PRO DigiMesh® 2.4 (Int'l)

PERFORMANCE

RF DATA RATE	250 Kbps	250 Kbps	250 Kbps
INDOR/URBAN RANGE	100 ft (30 m)	300 ft (90 m)	200 ft (60 m)
OUTDOOR/RF LINE-OF-SIGHT RANGE	300 ft (90 m)	1 mile (1.6 km)	2500 ft (750 m)
TRANSMIT POWER	1 mW (+0 dBm)	63 mW (+18 dBm)	10 mW (+10 dBm)
RECEIVER SENSITIVITY (1% PER)	-92 dBm	-100 dBm	-100 dBm

FEATURES

SERIAL DATA INTERFACE	3.3V CMOS serial UART	3.3V CMOS serial UART	3.3V CMOS serial UART
CONFIGURATION METHOD	AT & API	AT & API	AT & API
FREQUENCY BAND	2.4 GHz ISM	2.4 GHz ISM	2.4 GHz ISM
INTERFERENCE IMMUNITY	DSSS (Direct Sequence Spread Spectrum)	DSSS (Direct Sequence Spread Spectrum)	DSSS (Direct Sequence Spread Spectrum)
SERIAL DATA RATE	Up to 115.2 Kbps	Up to 115.2 Kbps	Up to 115.2 Kbps
ADC INPUTS	(6) 10-bit ADC inputs	(6) 10-bit ADC inputs	(6) 10-bit ADC inputs
DIGITAL I/O	13	13	13
ANTENNA OPTIONS	Chip, Wire Whip, U.FL, RPSMA	Chip, Wire Whip, U.FL, RPSMA	Chip, Wire Whip, U.FL, RPSMA

NETWORKING & SECURITY

ENCRYPTION	128-bit AES	128-bit AES	128-bit AES
RELIABLE PACKET DELIVERY	Retries/Acknowledgments	Retries/Acknowledgments	Retries/Acknowledgments
ADDRESSING OPTIONS	PAN ID, channel, 64-bit address	PAN ID, channel, 64-bit address	PAN ID, channel, 64-bit address
CHANNELS	16	12	12


POWER REQUIREMENTS

SUPPLY VOLTAGE	2.8 – 3.4VDC	2.8 – 3.4VDC	2.8 – 3.4VDC
TRANSMIT CURRENT	45 mA	250 mA (Wire, Chip, U.FL), 340 mA (RPSMA)	150 mA (Wire, Chip, U.FL), 180 mA (RPSMA)
RECEIVE CURRENT	50 mA	55 mA	55 mA
POWER-DOWN CURRENT	<50 uA	<50 uA	<50 uA


REGULATORY APPROVALS

FCC (USA)	Yes	Yes	Yes
IC (CANADA)	Yes	Yes	Yes
ETSI (EUROPE)	Yes	No	Yes
C-TICK AUSTRALIA	Yes	Yes	Yes
TELEC (JAPAN)	Yes	No	Yes
ANATEL (BRAZIL)	Yes	Yes	Yes


DigiMesh




Side Views



Top View

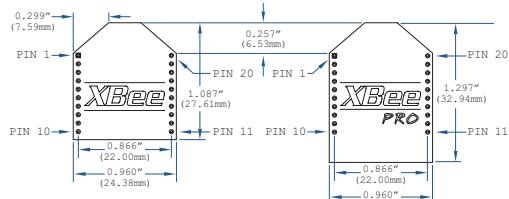

Top View



PART NUMBERS	DESCRIPTION
XB24-DMDK	North American/International (except Japan) DigiMesh 2.4 Development Kit w/ 2 XBee and 2 XBee-PRO modules
XB24-DMDK-WJ	Japan DigiMesh 2.4 Development Kit w/ 2 XBee and 2 XBee-PRO modules (International)
XB24-DMUIT-250	XBee DigiMesh 2.4 low power module w/ U.FL connector
XB24-DMSIT-250	XBee DigiMesh 2.4 low power module w/ RPSMA connector
XB24-DMWIT-250	XBee DigiMesh 2.4 low power module w/ wire antenna
XB24-DMPIT-250	XBee DigiMesh 2.4 low-power module w/ PCB antenna
XBP24-DMSIT-250	XBee-PRO DigiMesh 2.4 extended range module w/ RPSMA connector
XBP24-DMSIT-250J	XBee-PRO DigiMesh 2.4 extended range module w/ RPSMA connector (International)
XBP24-DMWIT-250	XBee-PRO DigiMesh 2.4 extended range module w/ wire antenna
XBP24-DMWIT-250J	XBee-PRO DigiMesh 2.4 extended range module w/ wire antenna (International)
XBP24-DMUIT-250	XBee-PRO DigiMesh 2.4 extended range module w/ U.FL connector
XBP24-DMUIT-250J	XBee-PRO DigiMesh 2.4 extended range module w/ U.FL connector (International)
XBP24-DMPIT-250	XBee-PRO DigiMesh 2.4 extended range module w/ PCB antenna
XBP24-DMPIT-250J	XBee-PRO DigiMesh 2.4 extended range module w/ PCB antenna (International)

XBee S1 hardware will be obsoleted in 2017 in favor of XBee S2C or newer hardware.

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2016 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001486
C3/1016

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

