

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







PowerStor XB Series

Snap-in cylindrical supercapacitors



Features and benefits

- · Over 10-year operating life at room temperature
- · Low ESR for high power density
- Large capacitance for high energy density
- · Long cycle life
- · Environmentally friendly electrolyte
- · UL Recognized

Applications

- · Hybrid battery or fuel cell systems
- · High pulse current applications
- · UPS / hold up power

Description

Eaton PowerStor supercapacitors are unique, ultra-high capacitance devices utilizing electrochemical double layer capacitor (EDLC) construction combined with new, high performance materials. This combination of advanced technologies allows Eaton to offer a wide variety of capacitor solutions tailored to specific applications that range from a few microamps for several days to several amps for milliseconds.



The PowerStor brand of supercapacitors (formerly of the Bussmann Division of Cooper Industries) is now part of Eaton's Electrical Group, Electronics Division.





Specifications

Capacitance	300F to 600F
Working voltage	2.5V
Surge voltage	2.85V
Capacitance tolerance	-10% to +10%
Operating temperature range	-25°C to 70°C

Standard Product¹

Capacitance (F)	Part number	Max. initial DC ESR (mΩ) (Equivalent Series Resistance)	Max continous current (A) ²	Peak current (A)³	Max leakage current (mA) ⁴	Max power (W)⁵	Stored energy (Wh) ⁶	Typical mass (g)
300	XB3550-2R5307-R	7	15	120	0.30	220	0.26	69
400	XB3560-2R5407-R	4.5	19	180	0.45	350	0.35	80
600	XB3585-2R5607-R	3.7	29	235	0.70	420	0.52	122


- 1. Capacitance, ESR and Leakage current are all measured according to IEC 62391-1 at 20°C
- 2. 15°C Temperature Rise
- 3. Peak Current is for 1 second = ½ Working Voltage x Capacitance / (1 + DC ESR x Capacitance)
- 4. Leakage current measured after 72 hours, 20°C
- 5. Max. Power = Working Voltage² / 4 / DC ESR
- 6. Stored energy = $\frac{1}{2}$ Capacitance x Working Voltage² / 3600

Performance

Parameter		Capacitance change (% of initial value)	ESR (% of max. initial value)		
Life					
@ Max. operating voltage and temp)	1500 hours	≤ 20%	≤ 200%		
Charge/discharge cycling ¹	500,000	≤ 20%	≤ 200%		
Storage Life					
-25°C to +70°C	1500 hours	≤ 20%	≤ 200%		
≤ 30°C	3 years	≤ 5%	≤ 10%		

^{1.} Cycling between max operating and 50% of max operating voltage at room temperature

Dimensions - mm

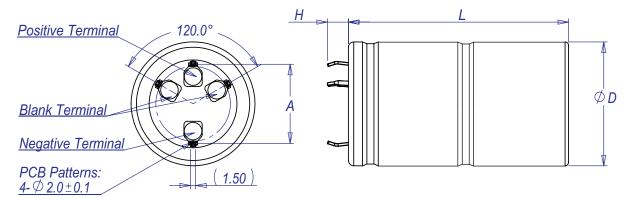

Part number	D ±1.0	L ±1.0	H ±1.0	A ±0.1
XV3550-2R7307-R	35	53	6	22.5
XV3560-2R7407-R	35	63	6	22.5
XV3585-2R7607-R	35	87.5	6	22.5

Part Numbering System

ХВ					-		R					-R
Series Code		Dimensions				Voltage (V) R = Decimal			Val	ue	Multiplier	
XB = Series	Diam	neter	Len	igth		2R5 = 2.5V		Example: 407 = 40 x 10 ⁷ µF or 400F			RoHS Compliant	

Packaging information

· Standard packaging: 20 pieces per box

Part marking

- · Manufacturer
- Capacitance (F)
- · Nominal Working Voltage (V)
- · Series Code (or part number)
- Polarity

North America

Eaton's Electrical Group Electronics Division 1225 Broken Sound Parkway NW Suite F Boca Raton, FL 33487-3533 Tel: 1-561-998-4100 Fax: 1-561-241-6640

Toll Free: 1-888-414-2645

Eaton's Electrical Group Electronics Division P.O. Box 14460 St. Louis, MO 63178-4460 Tel: 1-636-394-2877 Fax: 1-636-527-1607

Europe

Eaton's Electrical Group Electronics Division Burton-on-the-Wolds Leicestershire, LE 12 5th UK Phone: +44 (0) 1509 882 600 Fax: +44 (0) 1509 882 786

Eaton's Electrical Group Electronics Division Avda Santa Eulalia, 290 Terrassa, Barcelona 08223 Spain Phone: +34-93-736-2813 Fax: +34-93-783-5055

Asia Pacific

Eaton's Electrical Group Electronics Division No.2, #06-01 Serangoon North Avenue 5 Singapore 554911 Tel: +65 6645 9888 Fax: +65 6728 3155

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.



Eaton's Electrical Group Electronics Division 114 Old State Road Ellisville, MO 63021 United States www.eaton.com/elx

© 2014 Eaton All Rights Reserved Publication No. 4423 — BU-SB14xxx November 2014 Eaton is a registered trademark.

All other trademarks are property of their respective owners.