



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

## CMOS Logic

- ◆ CMOS Logic 2-channel Multiplexer
- ◆ Operating Voltage Range : 2V ~ 5.5V
- ◆ High Speed Operations :  $t_{pd} = 4.1\text{ns(TYP.)}$
- ◆ Low Power Consumption :  $2\mu\text{ A(MAX.)}$
- ◆ MSOP-8B Package

### ■ APPLICATIONS

- Palmtops
- Digital equipment

### ■ GENERAL DESCRIPTION

XC74WL157ASR is 2-channel multiplexer manufactured using silicon gate CMOS processes. The small quiescent current, which is one of the features of the CMOS logic, gives way to high speed operations which enables LS-TTL.

With wave forming buffers connected internally, stabilized output can be achieved as the series offers high noise immunity.

As the series is integrated into a mini molded, MSOP-8B package, high density mounting is possible.

### ■ FEATURES


**High Speed Operations** :  $t_{pd} = 4.1\text{ns(TYP.)}$  ( $V_{CC}=5\text{V}$ )

**Operating Voltage Range** : 2V ~ 5.5V

**Low Power Consumption** :  $2\mu\text{ A (MAX.)}$

**Small Package** : MSOP-8B

### ■ PIN CONFIGURATION

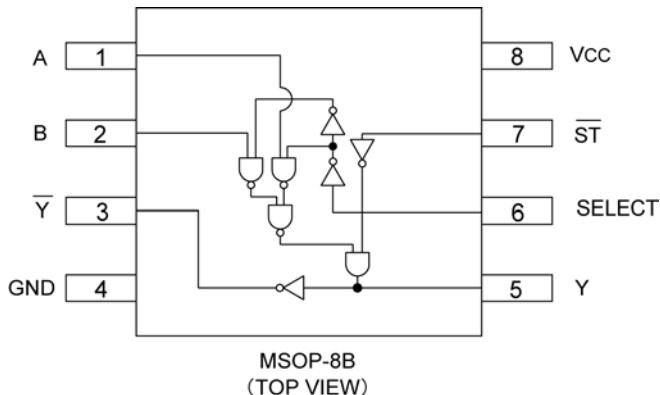

### ■ FUNCTIONS

INPUT				OUTPUT	
ST	SELECT	A	B	Y	Y-bar
H	X	X	X	L	H
L	L	L	X	L	H
L	L	H	X	H	L
L	H	X	L	L	H
L	H	X	H	H	L

H=High level

L=Low level

X=Don't care

## ■ ABSOLUTE MAXIMUM RATINGS

T<sub>a</sub>=-40°C~85°C

PARAMETER	SYMBOL	RATINGS	UNITS
Supply Voltage	V <sub>CC</sub>	-0.5~+6.0	V
Input Voltage	V <sub>IN</sub>	-0.5~+6.0	V
Output Voltage	V <sub>OUT</sub>	-0.5~V <sub>CC</sub> +0.5	V
Input Diode Current	I <sub>IK</sub>	-20	mA
Output Diode Current	I <sub>OK</sub>	± 20	mA
Switch Output Current	I <sub>OUT</sub>	± 25	mA
V <sub>CC</sub> ,GND Current	I <sub>CC</sub> ,I <sub>GND</sub>	± 50	mA
Power Dissipation (T <sub>a</sub> = 25°C)	P <sub>D</sub>	300	mW
Storage Temperature Range	T <sub>STG</sub>	-65~+150	°C

Note : Voltage is all ground standardized.

## ■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	CONDITIONS	UNITS
Supply Voltage	V <sub>CC</sub>	2~5.5	V
Input Voltage	V <sub>IN</sub>	0~5.5	V
Output Voltage	V <sub>OUT</sub>	0~V <sub>CC</sub>	V
Operating Temperature Range	T <sub>OPR</sub>	-40~+85	°C
Input Rise and Fall Time	t <sub>r</sub> , t <sub>f</sub>	0~200 ( V <sub>CC</sub> =3.3V ) 0~100 ( V <sub>CC</sub> =5V )	ns

## ■ DC ELECTRICAL CHARACTERISTICS

PARAMETER	SYMBOL	CONDITIONS		Ta=25°C			Ta=-40°C~85°C		UNITS
				MIN.	TYP.	MAX.	MIN.	MAX.	
Input Voltage	V <sub>IH</sub>	2.0	VIN=V <sub>IH</sub>	1.50	-	-	1.50	-	V
		3.0		2.10	-	-	2.10	-	
		5.5		3.85	-	-	3.85	-	
	V <sub>IL</sub>	2.0		-	-	0.50	-	0.50	V
		3.0		-	-	0.90	-	0.90	
		5.5		-	-	1.65	-	1.65	
Output Voltage	V <sub>OH</sub>	2.0	VIN=V <sub>IH</sub>	1.90	2.00	-	1.90	-	V
		3.0		2.90	3.00	-	2.90	-	
		4.5		4.40	4.50	-	4.40	-	
		3.0		IoH=-4mA	2.58	-	2.48	-	
		4.5		IoH=-8mA	3.94	-	3.80	-	
	V <sub>OL</sub>	2.0	VIN=V <sub>IL</sub>	-	-	0.10	-	0.10	V
		3.0		-	-	0.10	-	0.10	
		4.5		-	-	0.10	-	0.10	
		3.0		IoL=4mA	-	0.36	-	0.44	
		4.5		IoL=8mA	-	0.36	-	0.44	
Input Current	I <sub>IN</sub>	0~5.5	VIN=V <sub>CC</sub> or GND	-0.10	-	0.10	-1.00	1.00	μA
Static Supply Current	I <sub>CC</sub>	5.5	VIN=V <sub>CC</sub> or GND	-	-	2.00	-	20.0	μA

## ■ SWITCHING ELECTRICAL CHARACTERISTICS

(tr=tf=3ns)


PARAMETER	SYMBOL			CONDITIONS	Ta=25°C			Ta=-40°C~85°C		UNITS
		CL	Vcc(V)		MIN.	TYP.	MAX.	MIN.	MAX.	
Delay Time (A, B-Y, Ȳ)	tPLH	15pF	3.3		-	6.2	9.7	1.0	11.5	ns
			5.0		-	4.1	6.4	1.0	7.5	
		50pF	3.3		-	8.7	13.2	1.0	15.0	ns
			5.0		-	5.6	8.4	1.0	9.5	
	tPHL	15pF	3.3		-	6.2	9.7	1.0	11.5	ns
			5.0		-	4.1	6.4	1.0	7.5	
		50pF	3.3		-	8.7	13.2	1.0	15.0	ns
			5.0		-	5.6	8.4	1.0	9.5	
Delay Time (SEDECT-Y, Ȳ)	tPLH	15pF	3.3		-	8.4	13.2	1.0	15.5	ns
			5.0		-	5.3	8.1	1.0	9.5	
		50pF	3.3		-	10.9	16.7	1.0	19.0	ns
			5.0		-	6.8	10.1	1.0	11.5	
	tPHL	15pF	3.3		-	8.4	13.2	1.0	15.5	ns
			5.0		-	5.3	8.1	1.0	9.5	
		50pF	3.3		-	10.9	16.7	1.0	19.0	ns
			5.0		-	6.8	10.1	1.0	11.5	
Delay Time (ST-Y, Ȳ)	tPLH	15pF	3.3		-	8.7	13.6	1.0	16.0	ns
			5.0		-	5.6	8.6	1.0	10.0	ns
		50pF	3.3		-	11.2	17.1	1.0	19.5	ns
			5.0		-	7.1	10.6	1.0	12.0	ns
	tPHL	15pF	3.3		-	8.7	13.6	1.0	16.0	ns
			5.0		-	5.6	8.6	1.0	10.0	ns
		50pF	3.3		-	11.2	17.1	1.0	19.5	ns
			5.0		-	7.1	10.6	1.0	12.0	ns
Input Capacitance	C <sub>IN</sub>	-	-		-	4	10	-	10	pF
Power Dissipation Capacitance	C <sub>PD</sub>	-	-		-	20	-	-	-	pF

## ■ NOISE CHARACTERISTICS

(tr=tf=3ns)

PARAMETER	SYMBOL			CONDITIONS	Ta=25°C			UNITS
		CL	Vcc(V)		MIN.	TYP.	MAX.	
Non Functional Output Maximum Dynamic VOL	VO <sub>LP</sub>	50pF	5.0		-	0.3	0.8	V
Non Functional Output Minimum Dynamic VOL	VO <sub>LV</sub>	50pF	5.0		-0.8	-0.3	-	V
Minimum Dynamic VIH	VI <sub>HD</sub>	50pF	5.0		-	-	3.5	V
Maximum Dynamic Vil	VI <sub>LD</sub>	50pF	5.0		-	-	1.5	V

## ■ TEST CIRCUIT

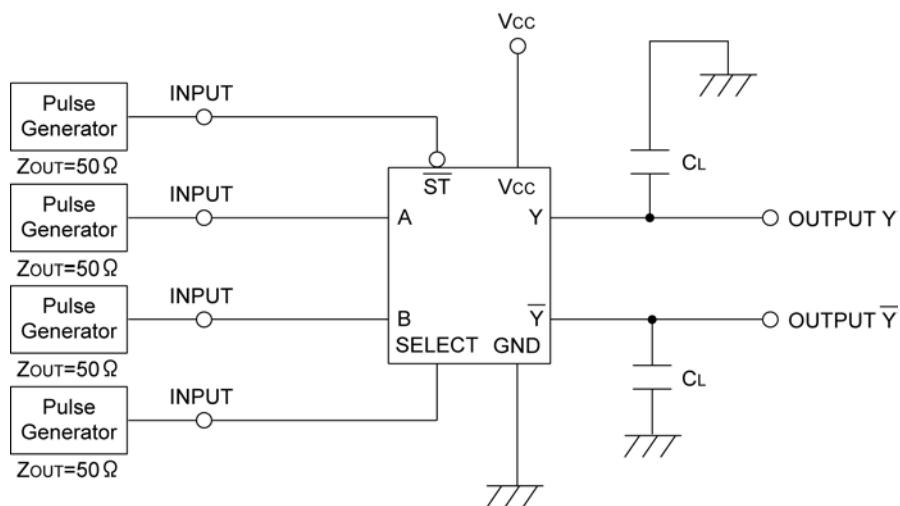

## ■ WAVEFORM

