



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





XPress™ DR / XPress™ DR-IAP

Industrial Device
Servers



REMOTELY CONFIGURE,
PROGRAM, MONITOR, AND
MANAGE:

Connect PLCs, drives, process controls, power monitoring equipment, barcode scanners, and other factory floor serial devices.

The XPress™ DR and XPress DR-IAP Device Servers enable virtually any industrial device with serial capability to be connected to a new or existing Ethernet network. By encapsulating serial data and transporting it over Ethernet, the XPress DR/DR-IAP establishes virtual serial links over Ethernet. By using these units, limited-distance, point-to-point, direct serial connections can now be extended within the plant, throughout the facility, or across the global enterprise.

When used in conjunction with an OPC server, most Windows® based HMI, SCADA, and PC-based control applications have full access to information in the connected device. Existing COM-port based Windows® applications can access network-enabled devices using Lantronix Com Port Redirector software. Com Port Redirector allows the creation of virtual serial ports, which can be mapped to remote device servers over Ethernet and connected to the XPress DR and XPress DR-IAP.

The XPress DR-IAP installable communication drivers allow specific support for various industrial communication protocols. With native support for these protocols, devices that previously allowed only one connection can now support multiple connections simultaneously.


Flexible configuration options allow the unit to be set up locally using the serial port, or remotely over Ethernet using Telnet or a common web browser. DeviceInstaller™, a Windows® based configuration software, simplifies installation and configuration, enables access to the Web Manager and Telnet communications, and ping attached devices over the network. Flash memory provides for maintenance-free, non-volatile storage, and allows future system upgrades.

Packaged in a rugged DIN-rail mount case and featuring 2000V galvanic isolation, 1500V Ethernet isolation, a wide 0° to 60°C operating range, and a 9-30VDC/9-24VAC power input, the XPress DR and XPress DR-IAP are ideal for virtually any industrial application.

XPress DR / XPress DR-IAP Highlights

- Connect enterprise (ERP, MES) systems to factory floor devices without disturbing existing control networks
- Allow remote firmware upgrades, saving money and time from manual upgrades
- XPress DR-IAP version supports industrial communication protocols
- Configurable serial interface supports RS-232, RS-422, or RS-485
- 10Base-T/100Base-TX Ethernet (RJ45)
- Isolated serial and Ethernet ports
- UL-approved for hazardous locations Class I, Division 2
- RoHS compliant

LANTRONIX

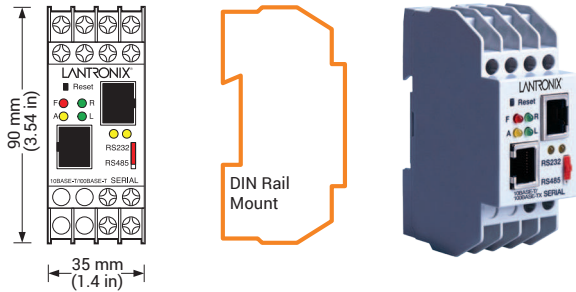

Features and Specifications

Serial Interface

- Interface: RS-232, RS-422, or RS-485
- Connector: Screw terminals or RJ45
- Data Rates: 300 to 115,200 bps
- Characters: 7 or 8 data bits
- Parity: odd, even, none
- Stop Bits: 1 or 2
- Flow Control:
- Software: XON/XOFF
- Hardware: RTS/CTS
- Installable Serial Protocols (XPress DR-IAP only)

Network Interface

- Standards: ARP, UDP/IP, TCP/IP, ICMP, SNMP, BOOTP,
- DHCP, TFTP, Telnet, and HTTP
- Interface: 10Base-T/100Base-TX Ethernet
- Connector: RJ45
- Installable Application Layer Protocols (XPress DR-IAP only)

Indicators

- Ready, Fault/Configuration, Activity, Link, Serial Transmit Data, Serial Receive Data

Management

- SNMP, serial, Telnet, and HTTP (web browser)

Isolation

- Ethernet:
 - 1500 Vrms from Serial Port
 - 2000 Vrms from Power Input Port
- Serial: 2000 Vrms from Power Input Port

Power

- Input: 9 to 30VDC/9-24VAC, 3W maximum
- Connector: Screw terminals for power and ground

Environmental (Operating)

- Temperature: 0° to 60°C (32° to 140°F)
- Humidity: 20% to 90% RH, non-condensing

Packaging

- Mounting: DIN-rail (35 mm)
- Material: High-impact plastic
- Dimensions: 60 x 36 x 90 mm (2.4 x 1.4 x 3.54 in)

Agency Approvals

- UL, CSA, CE, RCM, VCCI

Warranty

- 1-Year Limited Warranty



Software

- DeviceInstaller, a Windows® based configuration software, simplifies initial set up and device configuration (available as a free download)

Shipping Dimensions

- Size: (L x W x H) 187.3 x 228.6 x 111 mm (7.375 x 9.0 x 4.375 in)

Master/Slave Application

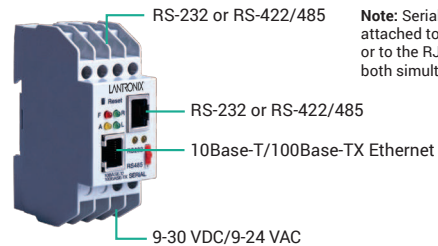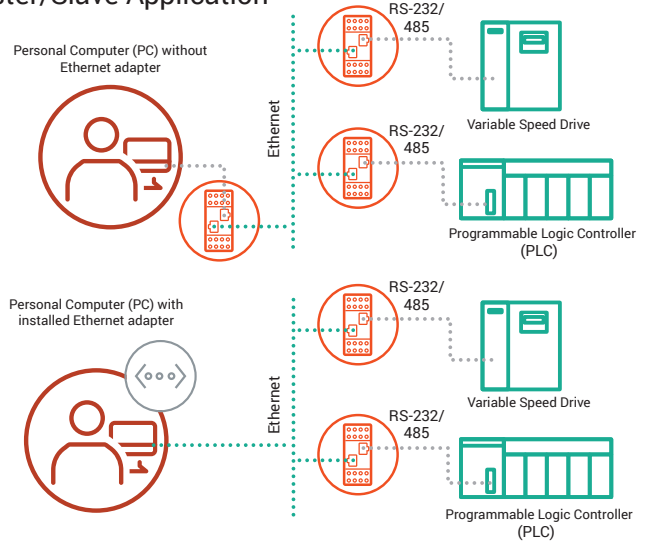

Note: Serial connections may be attached to either the terminal block or to the RJ45 connector – but not both simultaneously.

Part Number Description

Part Number	Description
XSDRSN-03	XPress DR Industrial Device Server, DIN Rail Mount, Serial Interface (RS-232/RS-422/RS-485 - terminal block or RJ45), 10Base-T/100Base-TX, 9-30VDC/ 9-24VAC, RoHS
XSDRIN-03	XPress DR-IAP Industrial Device Server with Installable Industrial Protocols, DIN Rail Mount, Serial Interface (RS-232/RS-422/RS-485 - terminal block or RJ45), 10Base-T/100Base-TX, 9-30VDC/9-24VAC, RoHS

Ordering Information

Americas

Call: 800.422.7055
 sales@lantronix.com
 Buy Online:
<http://www.lantronix.com>
 NASDAQ: LTRX

China

Call: +86.021.6237.8868
 Shanghai@lantronix.com

Europe

Call: +31 (0) 76.52.3.6.74 4
 EMEA@lantronix.com

Asia/Pacific

Call: +852 3428.2338
 asiapacific_sales@lantronix.com

Japan

Call: +81.3.6277.8802
 japan_sales@lantronix.com