



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





1 WATT/900 MHZ
STAND-ALONE
RADIO MODEMS

XTEND[®]-PKG RF MODEMS



900 MHz radio modems offer long-range performance, advanced networking and simple out-of-the-box operation with multiple data interface options

Digi's XTend-PKG RF modems provide everything you need for out-of-the-box serial cable replacement, enabling quick wireless connectivity of electronic devices across a broad range of applications. Simply feed data into one modem and the data is transported to the other end of a long range wireless link. Data security is provided by 256-bit AES encryption (128-bit AES is available outside of North America). If more advanced functionality is needed, the modems support an extensive set of AT and binary commands.

Available in multiple interface options, including RS-232/422/485 and USB, XTend modems are ideally suited for remote monitoring, building automation/security, industrial automation/SCADA, fleet management/asset tracking and sensor data capture in embedded systems.

BENEFITS

- Outdoor line-of-sight range up to 40 miles (with high gain antenna)
- Outstanding receiver sensitivity (-110 dBm @ 9600 bps)
- Adjustable power output from 100 mW to 1 W; up to 4 W EIRP (with 6 dB antenna)
- Low power consumption for power-sensitive applications
 - Pin, serial port and cyclic sleep modes available
- Streaming, acknowledged and multi-transmit modes supported
- Easy out-of-the box operation — no configuration necessary
- Durable industrial grade enclosure

RELATED PRODUCTS



XTend[®] OEM
RF Module



Digi XLR PRO™



ConnectPort[®]
X2




XCTU



Accessories

APPLICATION EXAMPLE

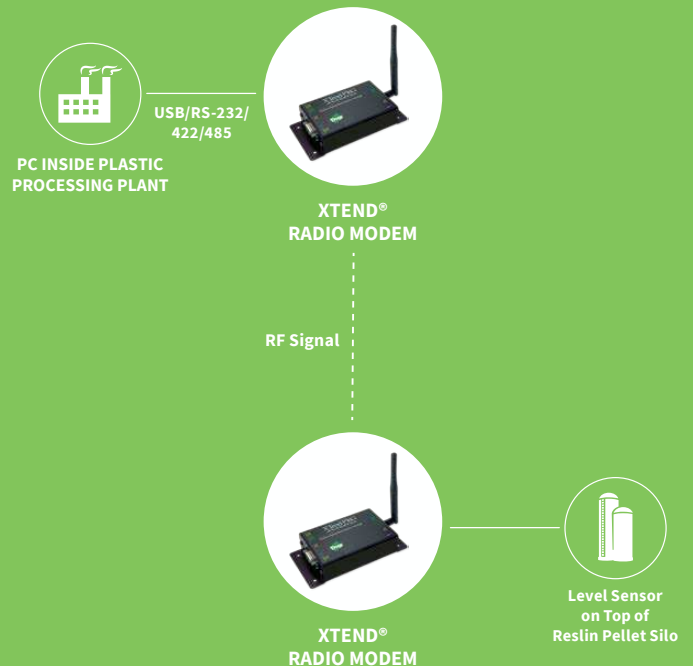

SPECIFICATIONS

XTend®-PKG-R

XTend®-PKG-U

PERFORMANCE

INDOOR/URBAN RANGE (W/ 2.1 DB DIPOLE ANTENNA)	Up to 1000 feet (305 m)
OUTDOOR RF LINE-OF-SIGHT RANGE (W/ 2.1 DB DIPOLE ANTENNA)	Up to 9 miles (14 km)
OUTDOOR RF LINE-OF-SIGHT RANGE (W/ HIGH-GAIN ANTENNA)	Up to 40 miles (64 km)
TRANSMIT POWER OUTPUT (SOFTWARE SELECTABLE)	100 mW - 1 W (20 - 30 dBm)
INTERFACE DATA RATE	10 - 230,400 bps (including non-standard baud rates)
RF DATA RATE	10 Kbps to 125 Kbps
RECEIVER SENSITIVITY	-110 dBm (@9,600 bps throughput data rate), -100 dBm (@115,200 bps)

POWER REQUIREMENTS

SUPPLY VOLTAGE	7 - 28V	7 - 28V
RECEIVE CURRENT	110 mA	100 mA (Self Power)
TRANSMIT CURRENT	Up to 580 mA	88 - 480 mA
PIN SLEEP POWER-DOWN	18 mA	17 mA
IDLE CURRENT (VARIOUS CYCLIC SLEEP INTERVALS)	19 - 39 mA	21 - 35 mA (Self Power)
SERIAL PORT SLEEP POWER-DOWN	45mA	45mA

GENERAL





CONNECTION OPTIONS	RS-232/422/485, DB-9	USB
DIMENSIONS (L X W X H)	2.75 in x 5.50 in x 1.13 in (6.99 cm x 13.97 cm x 2.86 cm)	2.75 in x 5.50 in x 1.13 in (6.99 cm x 13.97 cm x 2.86 cm)
WEIGHT	7.10 oz (200 g)	7.10 oz (200 g)
OPERATING TEMPERATURE	-40° C to 85° C (industrial)	0° C to 70° C (commercial)
ANTENNA OPTIONS	RPSMA (Reverse Polarity SMA)	RPSMA (Reverse Polarity SMA)
IMPEDANCE	50 ohms unbalanced	50 ohms unbalanced

NETWORKING & SECURITY

OPERATING FREQUENCY	ISM 902 - 928 MHz
SPREAD SPECTRUM	FHSS (Frequency Hopping Spread Spectrum)
MODULATION	FSK (Frequency Shift Keying)
SUPPORTED NETWORK TOPOLOGIES	Peer-to-Peer (no master/slave dependencies), Point-to-Point, Point-to-Multipoint
CHANNEL CAPACITY	10 hop sequences share 50 frequencies
ENCRYPTION	256-bit AES Encryption (AES algorithm meets Federal Information Processing Standard-197 (FIPS-197))

AGENCY APPROVALS

FCC PART 15.247	MCQ-XBPSX
INDUSTRY CANADA (IC)	1846A-XBPSX
AUSTRALIA	RCM



PART NUMBERS	DESCRIPTION
XTP9B-PKI-R	XTend Replacement, PKG, Serial, North America
XTP9B-PKI-RA	XTend Replacement, PKG, Serial, w/ Accessories, North America
XTP9B-PKI-RA-NL	XTend Replacement, PKG, Serial, w/ Accessories, No label, North America
XTP9B-PKI-RA-NA	XTend Replacement, PKG, Serial, w/ Accessories, 128-bit AES, North America
XTP9B-PKC-UA	XTend Replacement, PKG, USB, w/ Accessories, North America
XTPH9B-PKI-RA-NA	XTend Replacement, PKG, RS232/485, Includes Accessories, 128-bit AES, Australia

FOR MORE INFORMATION
PLEASE VISIT WWW.DIGI.COM

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2016 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001409
C4/716

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL FRANCE
+33-1-55-61-98-98 / www.digi.fr

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

