



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# XT Supercapacitors

## Snap-in cylindrical cells



### Features and benefits

- 3.0 V operating voltage for high power and energy
- Ultra low ESR for very high power density
- Large capacitance for high energy density
- UL recognized

### Applications

- Smart meters: electric, water, gas
- RF radio pulse power
- Storage server
- Industrial backup/ridethrough
- Pulse power
- Solar capture

### Description

Eaton supercapacitors are unique, ultra-high capacitance devices utilizing electrochemical double layer capacitor (EDLC) construction combined with new, high performance materials.

This combination of advanced technologies allows Eaton to offer a wide variety of capacitor solutions tailored to specific applications that range from a few micro-amps for several days to several amps for seconds.

The XT family advances the energy density by 20% and power density by 10%. These advances allow longer operating life and/or lower cost systems.



*Powering Business Worldwide*

## Ratings

Capacitance	275 F to 555 F
Working voltage	3.0 V
Surge voltage	3.3 V
Capacitance tolerance	-5% to +20% (+20 °C)
Operating temperature range	-40 °C to +65 °C
Extended operating temperature range	-40 °C to +85 °C (with linear voltage derating to 2.6 V @ +85 °C)

## Specifications

Capacitance <sup>1</sup> (F)	Part Number	Maximum initial ESR <sup>1</sup> (mΩ)	Continuous current <sup>5</sup> (A)	Peak current <sup>5</sup> (A)	Nominal leakage current <sup>2</sup> (mA)	Peak power <sup>4</sup> (W)	Stored energy <sup>3</sup> (mWh)	Typical thermal resistance <sup>7</sup> Rth (°C/W)	Short circuit current <sup>**8</sup> (A)
275	XT3550-3R0287-R	4.5	20.4	184	0.60	500	344	8	670
370	XT3560-3R0377-R	3.2	25.9	254	0.85	700	463	7	940
555	XT3585-3R0567-R	2.6	33.0	341	1.30	870	694	5	1150

\*\* Short circuit will cause permanent damage to the leads

## Performance

Parameter	Capacitance Change (% of initial value)	ESR (% of initial maximum value)
Lifetime — 1,500 hours at maximum rated voltage and operating temperature	≤ 20%	≤ 200%
Charge/discharge cycling <sup>9</sup> — 500,000 at +20 °C	≤ 20%	≤ 200%
Storage, uncharged, up to +35 °C — 3 years	≤ 5%	≤ 10%

1. Capacitance, Equivalent Series Resistance (ESR) and Leakage current are measured according to IEC62391-1.

2. Leakage current at +20 °C after 72 hour charge and hold.

3. Stored Energy (mWh) =  $\frac{0.5 \times C \times V^2 \times 1000}{3600}$

4. Peak Power (W) =  $\frac{V^2}{4 \times \text{ESR}}$

5. Peak current for 1 second from full rate voltage to half voltage.(A) =  $\frac{0.5 \times V \times C}{(1 + \text{ESR} \times C)}$

6. Continuous current with a 15 °C temperature rise. Continuous current (A) =  $\sqrt{\frac{3V}{\text{ESR} \times \text{Rth}}}$

7. Thermal resistance (Rth) cell body temperature to ambient in open air in degrees C per Watt (°C/W).


8. Short circuit current is for safety information only. Do not use as operating current.

9. Cycling between maximum working voltage and half voltage with 3 seconds rest at +20 °C.

## Safety and Certifications

Agency information	UL810a
Shock and vibration	MIL-STD-202G
Environmental	RoHS and REACH compliant, lead free, halogen free,
Warnings	Do not overvoltage, do not reverse polarity
Shipping	No restrictions, per UN3499 with all cells <10 watt-hours

**Dimensions (mm) and Mass (g)**

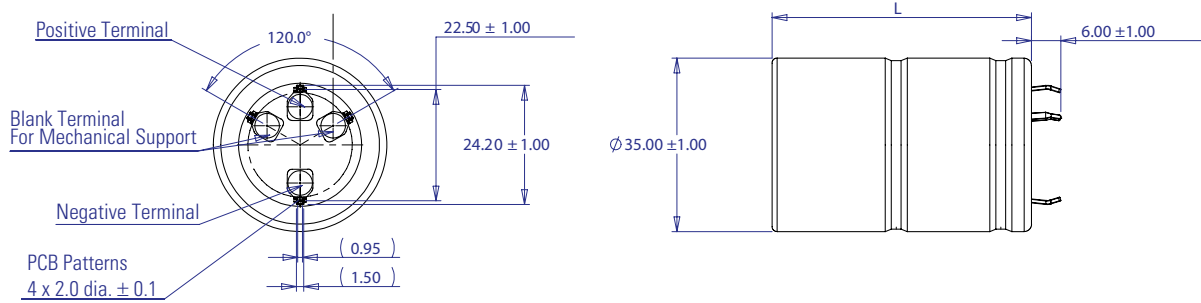

Part Number	L (±1.0)	Typical Mass (g)
XT3550-3R0287-R	53	62
XT3560-3R0377-R	63	72
XT3585-3R0567-R	87.5	108

**Part numbering system**

XT	3560	-3R0	37	7	-R	
Family code	Size reference (mm)		Voltage (V) R = decimal	Capacitance (µF) Value	Multiplier	Standard product
XT = Family Code	Diameter = 35	Length = 60	3R0 = 3.0 V	Example 377 = 37 x 10 <sup>7</sup> µF or 275 F		


**Packaging information**

- Standard packaging: Bulk, 20 parts per box

**Part Marking**

- Manufacturer
- Capacitance (F)
- Maximum working voltage (V)
- Family code or part number
- Polarity
- 2D matrix serial code

### Wave solder profile

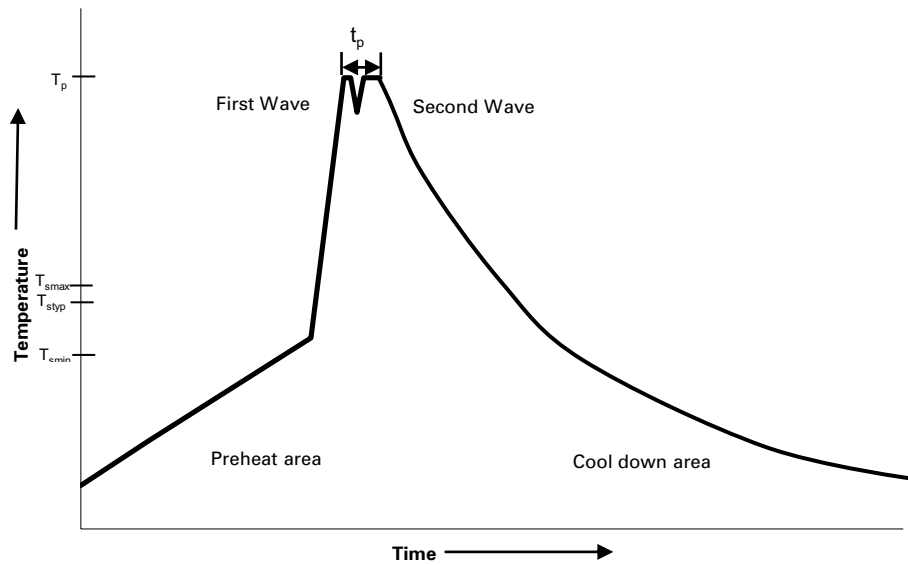

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and soak		
• Temperature max. ( $T_{smax}$ )	100 °C	100 °C
• Time max.	60 seconds	60 seconds
$\Delta$ preheat to max Temperature	160 °C max.	160 °C max.
Peak temperature ( $T_p$ )*	220 °C – 260 °C	250 °C – 260 °C
Time at peak temperature ( $t_p$ )	10 seconds max 5 seconds max each wave	10 seconds max 5 seconds max each wave
Ramp-down rate	~ 2 K/s min ~3.5 K/s typ ~5 K/s max	~ 2 K/s min ~3.5 K/s typ ~5 K/s max
Time 25 °C to 25 °C	4 minutes	4 minutes

### Manual solder

+350 °C, 4-5 seconds. (by soldering iron), generally manual, hand soldering is not recommended.

### Cleaning/Washing

Avoid cleaning of circuit boards, however if the circuit board must be cleaned use static or ultrasonic immersion in a standard circuit board cleaning fluid for no more than 5 minutes and a maximum temperature of +60 °C. Afterwards thoroughly rinse and dry the circuit boards. In general, treat supercapacitors in the same manner you would an aluminum electrolytic capacitor.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin

**Eaton**  
Electronics Division  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
www.eaton.com/electronics

© 2018 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. 10762 BU-MC18002  
February 2018

Eaton is a registered trademark.

All other trademarks are property of their respective owners.