



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Bulk Metal® Foil Technology Industrial Grade Miniature Voltage Divider with TCR Tracking of 1.5 ppm/°C and Ratio Stability of 0.001 % (10 ppm)



The VSR144 is an industrial version of the 300144. This device has the stability that is inherent in foil but does not offer the tight match, TCR, or TCR tracking of the 300144. This product is quite satisfactory for most industrial purposes and should be considered when the total performance of the 300144 is not necessary.



### FEATURES

- Temperature coefficient of resistance (TCR):  
absolute:  $\pm 4$  ppm/°C (0 °C to + 60 °C)  
 $\pm 8$  ppm/°C (- 55 °C to + 125 °C,  
+ 25 °C ref.)  
tracking: 1.5 ppm/°C
- Tolerance: absolute and matching to  $\pm 0.01$  %
- Resistance range: 100R to 20K per resistive element
- Vishay Foil resistors are not restricted to standard values/ratios; specific “as requested” values/ratios can be supplied at no extra cost or delivery (e.g. 1K2345 vs. 1K)
- Power rating: 0.2 W at 70 °C, for the entire resistive element  $R_1$  and  $R_2$ , divided proportionally between the two elements
- Load life ratio stability: < 0.001 % (10 ppm) 0.2 W at 70 °C for 2000 h
- Maximum working voltage: 200 V
- Electrostatic discharge (ESD) up to 25 000 V
- Non-inductive, non-capacitive design
- Rise time: 1.0 ns effectively no ringing
- Current noise: 0.010  $\mu\text{V}_{\text{RMS}}/\text{V}$  of applied voltage (< - 40 dB)
- Thermal EMF: 0.05  $\mu\text{V}/^\circ\text{C}$  typical
- Thermal stabilization time < 1 s (nominal value achieved within 10 ppm of steady state value)
- Voltage coefficient: < 0.1 ppm/V
- Non-inductive: < 0.08  $\mu\text{H}$
- Non hot spot design
- Terminal finish: lead (Pb)-free or tin/lead alloy
- Compliant to RoHS directive 2002/95/EC
- Prototype quantities available in just 5 working days or sooner. For more information, please contact [foil@vishaypg.com](mailto:foil@vishaypg.com)
- For better performances, please see 300144 and 300144Z datasheets


**TABLE 1A - MODEL VSR144  
SPECIFICATIONS**

RESISTANCE VALUES	ABSOLUTE TOLERANCE	ABSOLUTE TCR (- 55 °C to + 125 °C, + 25 °C ref.) TYPICAL AND MAX. SPREAD
$\geq 500 \Omega$ to 20 k $\Omega$	$\pm 0.01$ %	$\pm 2$ ppm/°C $\pm 3$ ppm/°C
100 $\Omega$ to < 500 $\Omega$	$\pm 0.02$ %	

**TABLE 1B - MODEL VSR144  
SPECIFICATIONS**


RESISTANCE RATIO	TOLERANCE MATCH	TCR TRACKING MAX.
1:1	$\pm 0.01$ %	0.5 ppm/°C
> 1:1 to 4:1		1.0 ppm/°C
> 4:1 to 10:1	$\pm 0.02$ %	1.5 ppm/°C
> 10:1		2.0 ppm/°C

**FIGURE 1 - TEMPERATURE COEFFICIENT OF RESISTANCE**

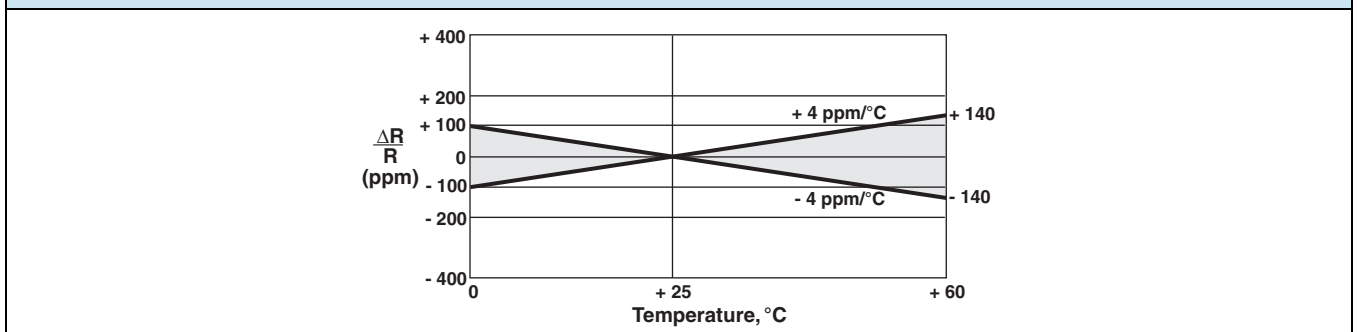

\* Pb containing terminations are not RoHS compliant, exemptions may apply

**FIGURE 2 - MODEL VSR144 STANDARD PRINTING AND DIMENSIONS** in inches (millimeters)

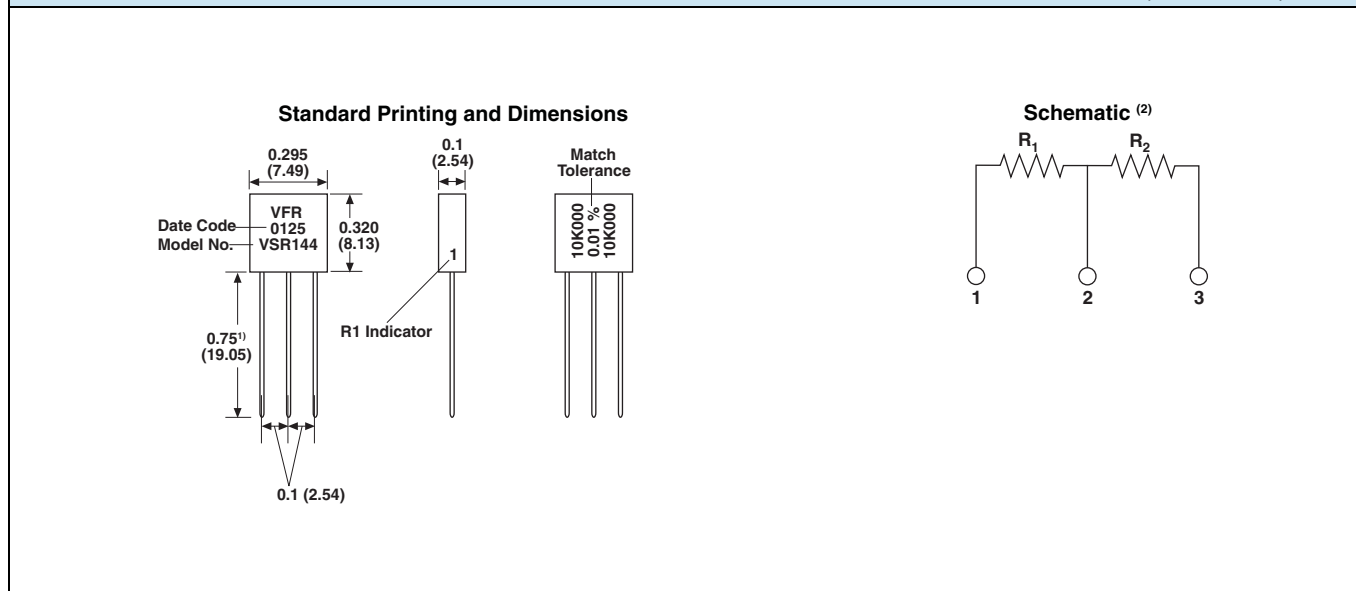

### Notes

- Tolerance:  $\pm 0.010\%$
- (1) Lead wires: #22 AWG solder coated copper, 0.75" minimum length
- (2) Each resistor contains 1 chip of two resistive elements

**TABLE 2 - MODELS VSR144 SPECIFICATIONS**

VFR MODEL	POWER RATING <sup>(1)(2)</sup>	STANDARD RESISTANCE TOLERANCE		TCR TRACKING AVAILABLE TO
		ABSOLUTE AVAILABLE TO	RATIO MATCH AVAILABLE TO	
VSR144	0.2 W at + 70 °C (for the entire resistive element R <sub>1</sub> and R <sub>2</sub> ) divided proportionally between the two values	$\pm 0.02\%$	$\pm 0.02\%$	< $\pm 1.5$ ppm/°C for like values < $\pm 2.0$ ppm/°C standard

### Note

- (1) Power is divided proportionally between the 2 values

**TABLE 3 - EXAMPLES OF VCODES FOR POPULAR VALUES** (other values available on request)


VSR144 RATIOS					
VCODES	R <sub>1</sub>	R <sub>2</sub>	VCODES	R <sub>1</sub>	R <sub>2</sub>
V0009	20K	20K	V0058	2K	20K
V0010	20K	10K	V0030	2K	18K
V0100	20K	2K	V0029	2K	4K
V0055	19K4	9K7	V0059	2K	2K
V0223	17K5	20K	V0103	2K	3K
V0097	15K	15K	V0154	1K5	3K
V0001	10K	10K	V0032	1K	16K
V0042	10K	8K323	V0121	1K	2K
V0006	10K	2K	V0004	1K	1K
V0166	10K	15K	V0379	1K	7K
V0226	9K	10K	V0374	800R	800R
V0003	9K	1K	V0022	511R	16K2
V0013	8K	16K	V0091	500R	500R
V0107	6K	20K	V0162	500R	15K
V0014	6K	7K	V0378	500R	4K5
V0160	6K	6K	V0061	300R	300R
V0159	5K5	7K7	V0088	100R	100R
V0005	5K	10K	V0380	100R	15K
V0002	5K	5K	V0375	100R	12K3
V0373	4K	12K	V0381	100R	50R
V0026	3K	19K2	V0377	50R	28K
V0156	3K	6K	V0376	35R	20K
V0158	2K7	10K	-	-	-

**Note**

- A combination of these values are available in reverse order and in values up to 5 digits

**TABLE 4 - GLOBAL PART NUMBER INFORMATION (1)**

NEW GLOBAL PART NUMBER: Y0094V0107QQ9L (preferred part number format)

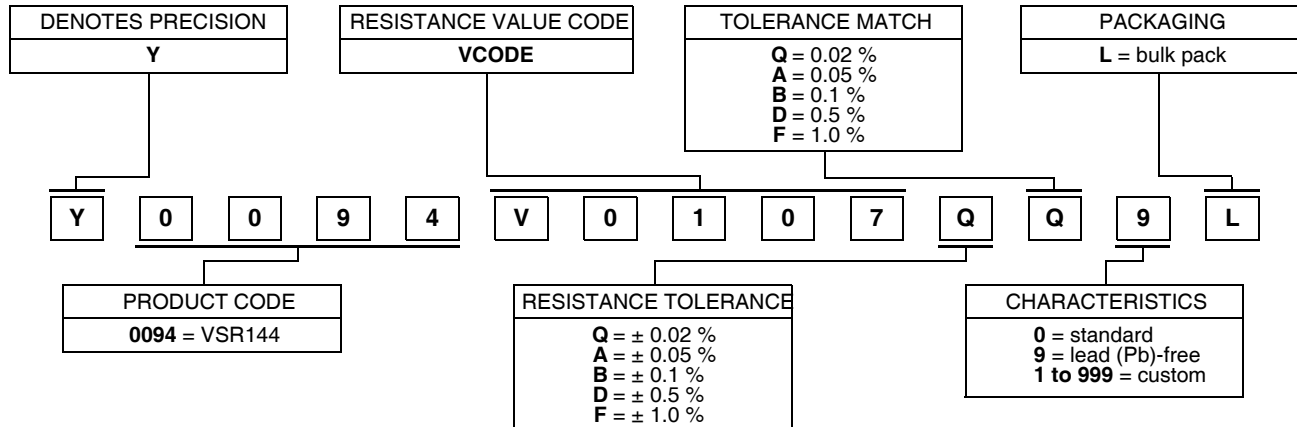

FOR EXAMPLE: ABOVE GLOBAL ORDER Y0094 V0107 Q Q 9 L:

TYPE: VSR144

VALUE: 6K/20K

ABSOLUTE TOLERANCE: ± 0.02 %

TOLERANCE MATCH: ± 0.02 %

TERMINATION: lead (Pb)-free

PACKAGING: bulk pack

HISTORICAL PART NUMBER: VSR144T 6K/20K TCR2 Q Q B (will continue to be used)

<b>VSR144</b>	<b>T</b>	<b>6K/20K</b>	<b>TCR2</b>	<b>Q</b>	<b>Q</b>	<b>B</b>
MODEL	TERMINATION	OHMIC VALUE	TCR Characteristic	ABSOLUTE TOLERANCE	TOLERANCE MATCH	PACKAGING
<b>VSR144</b>	<b>T = lead (Pb)-free None = tin/lead alloy</b>	<b>R1 = 6.0 kΩ R2 = 20.0 kΩ</b>		<b>Q = ± 0.02 % A = ± 0.05 % B = ± 0.1 % D = ± 0.5 % F = ± 1.0 %</b>	<b>Q = 0.02 % A = 0.05 % B = 0.1 % D = 0.5 % F = 1.0 %</b>	<b>B = bulk pack</b>

**Note**

(1) For non-standard requests, please contact application engineering



## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.