



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Ultra High Precision Z-Foil Power Resistor in TO-220 Configuration with TCR of $\pm 0.05 \text{ ppm}/^\circ\text{C}$, PCR of $4 \text{ ppm}/\text{W}$ and Load Life Stability of $\pm 0.005 \%$ (50 ppm)



Any value at any tolerance available within resistance range

INTRODUCTION

The Z-Foil Technology provides a significant reduction of the resistive component's sensitivity to ambient temperature variations (TCR) and applied power changes (PCR).

VPR221Z provides high rated power, excellent load life stability, low Temperature Coefficient (TCR) and low Power Coefficient (PCR) - all in one resistor. $\pm 0.05 \text{ ppm}/^\circ\text{C}$ Absolute TCR removes error due to temperature gradients.

By taking advantage of the overall stability and reliability of Bulk Metal[®] Z-Foil resistors, designers can significantly reduce circuit errors and greatly improve overall circuit performances.

Model VPR221Z is a 4 lead kelvin connected device.

Our Application Engineering Department is available to advise and make recommendations. For non-standard technical requirements and special applications, please contact us.

TABLE 1 - TCR AND TOLERANCE		
RESISTANCE RANGE (Ω)	TIGHTEST RESISTANCE TOLERANCE	TYPICAL TCR AND MAX. SPREAD ¹⁾
0.5 to < 1	$\pm 0.05 \%$	$\pm 0.2 \text{ ppm}/^\circ\text{C} \pm 2.8 \text{ ppm}/^\circ\text{C}$
1 to < 10	$\pm 0.02 \%$	$\pm 0.2 \text{ ppm}/^\circ\text{C} \pm 2.3 \text{ ppm}/^\circ\text{C}$
10 to 500	$\pm 0.01 \%$	$\pm 0.2 \text{ ppm}/^\circ\text{C} \pm 1.8 \text{ ppm}/^\circ\text{C}$

Notes

- MIL-Range (- 55 $^\circ\text{C}$ to + 125 $^\circ\text{C}$, + 25 $^\circ\text{C}$ Ref.)
- Contact Applications Engineering for other available values

FEATURES

- Temperature coefficient of resistance (TCR): $\pm 0.05 \text{ ppm}/^\circ\text{C}$ typical (0 $^\circ\text{C}$ to + 60 $^\circ\text{C}$)
 $\pm 0.2 \text{ ppm}/^\circ\text{C}$ typical (- 55 $^\circ\text{C}$ to + 125 $^\circ\text{C}$, + 25 $^\circ\text{C}$ ref.) (see table 1)
- Tolerance: to $\pm 0.01 \%$
- Power coefficient "ΔR due to self heating"
4 ppm/W typical
- Rated power: 8 W chassis mounted (MIL-PRF-39009)
- Load life stability: to $\pm 0.005 \%$ at 25 $^\circ\text{C}$ for 2000 hours, at 1.5 W
- Resistance range: 0.5 Ω to 500 Ω
- Electrostatic discharge (ESD) above 25 000 V
- Short time overload $\leq 0.001 \%$ (10 ppm)
- Non-inductive, non-capacitive design
- Rise time: 1 ns without ringing
- Current noise < - 40 dB
- Thermal EMF: 0.05 $\mu\text{V}/^\circ\text{C}$ typical
- Voltage coefficient < 0.1 ppm/V
- Non inductive: < 0.08 μH
- Non hot spot design
- Terminal finishes available: lead (Pb)-free tin/lead alloy
- Any value available within resistance range (e.g. 1K234)
- For better performances please contact us



APPLICATIONS

- Automatic test equipment (ATE)
- High precision instrumentation
- Electron beam application
- Current sensing applications
- Pulse applications
- Military
- Power amplifier
- Power supplies








FIGURE 1- POWER DERATING CURVE

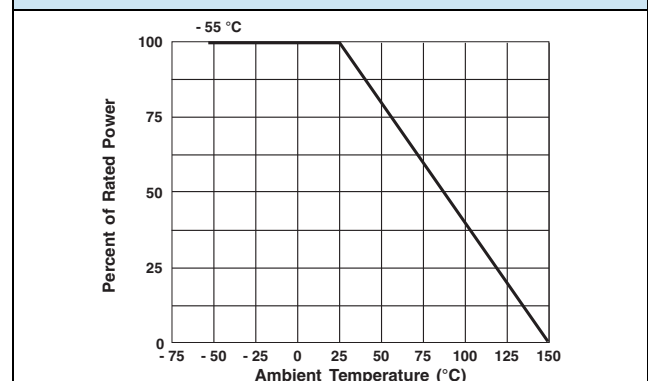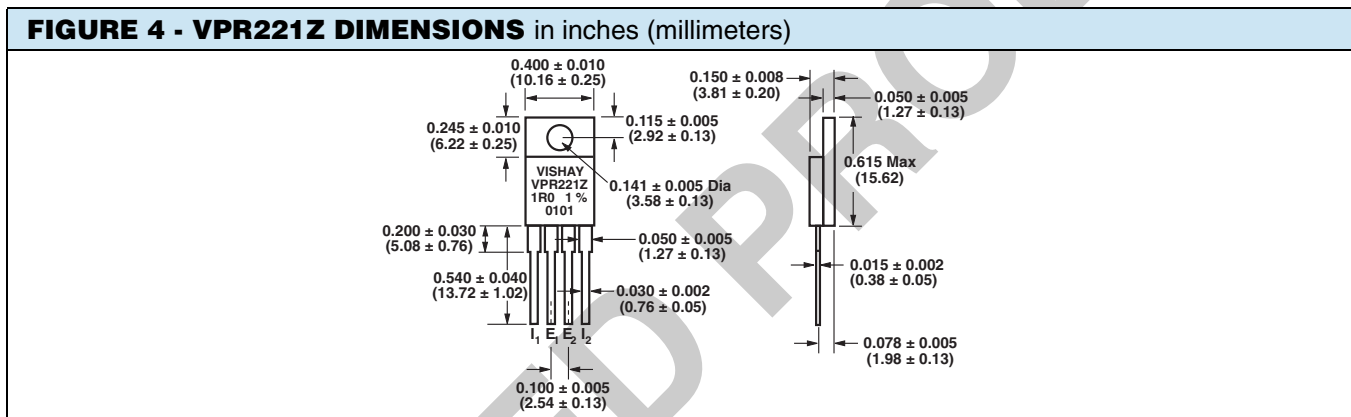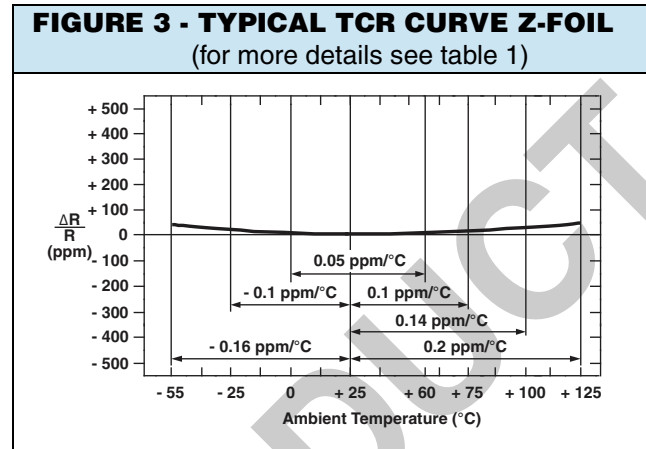

* Pb containing terminations are not RoHS compliant, exemptions may apply

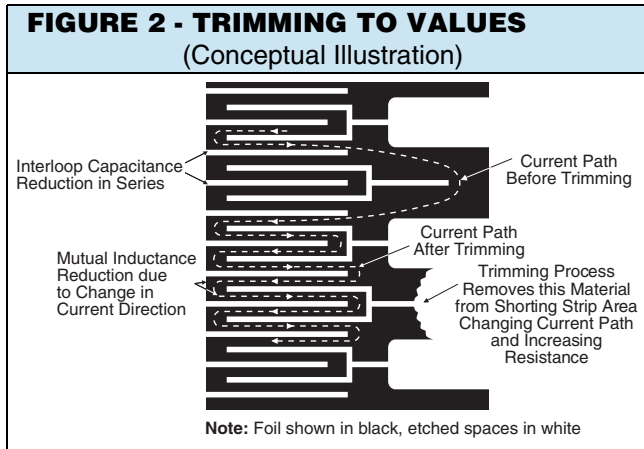

A surface mount version of this product is available see data sheets for VPR220S, VPR221S

TABLE 2 - SPECIFICATIONS	
Power Rating at + 25 °C	8 W or 3 A ²⁾ on heat sink ³⁾ 1.5 W in free air Further derating not necessary.
Current Noise	< 0.010 μV (rms)/V of applied voltage (- 40 dB)
High Frequency Operation Rise Time Inductance ⁴⁾ (L) Capacitance (C)	0.2 ns at 1 W 0.1 μH maximum: 0.03 μH typical ¹⁾ 1.0 pF maximum: 0.5 pF typical ¹⁾
Voltage Coefficient ⁵⁾	< 0.1 ppm/V
Operating Temperature Range	- 55 °C to + 150 °C
Maximum Working Voltage	300 V, Not to exceed power rating
Thermal EMF ⁶⁾	0.15 μV/°C maximum (lead effect)
Weight	1.2 g maximum

Notes

- Maximum is 1.0 % A.Q.L. standard for all specifications except TCR.
- Whichever is lower.
- Heat sink chassis dimensions are requirements per MIL-R-39009/1B:

- Inductance (L) mainly due to the leads.
- The resolution limit of existing test requirement (within the measurement capability of the equipment, "essentially zero").
- μV/°C relates to EMF due to lead temperature difference.

DIMENSIONS	inches	mm
L	6.00	152.4
W	4.00	101.6
H	2.00	50.8
T	0.04	1.0

TABLE 3 - PERFORMANCE SPECIFICATIONS¹⁾ MIL-PRF 39009


TEST OR CONDITION	MIL-PRF 39009	TYPICAL ΔR	MAXIMUM ΔR
Low temperature storage 24 hours at - 55 °C	$\pm 0.3 \% + 0.01 \Omega$	$\pm 0.001 \% (10 \text{ ppm})$	$\pm 0.002 \% (20 \text{ ppm})$
Dielectric withstanding voltage 300 V AC at Atm	$\pm 0.2 \% + 0.01 \Omega$	$\pm 0.001 \% (10 \text{ ppm})$	$\pm 0.002 \% (20 \text{ ppm})$
Dielectric withstanding voltage 200 V AC at Brm	$\pm 0.2 \% + 0.01 \Omega$	$\pm 0.001 \% (10 \text{ ppm})$	$\pm 0.002 \% (20 \text{ ppm})$
Insulation resistance	$> 10^4 M\Omega$		$> 10^4 M\Omega$
Low temperature operation	$\pm 0.3 \% + 0.01 \Omega$	$\pm 0.002 \% (20 \text{ ppm})$	$\pm 0.008 \% (80 \text{ ppm})$
Short time overload 5 x rated power for 5 seconds (in air)	$\pm 0.3 \% + 0.01 \Omega$	$\pm 0.001 \% (10 \text{ ppm})$	$\pm 0.002 \% (20 \text{ ppm})$
Moisture resistance + 65 °C to - 10 °C, 90 to 98 Rh, 10 days	$\pm 0.5 \% + 0.01 \Omega$	$\pm 0.005 \% (50 \text{ ppm})$	$\pm 0.015 \% (150 \text{ ppm})$
Terminal Strength	$\pm 0.2 \% + 0.01 \Omega$	$\pm 0.001 \% (10 \text{ ppm})$	$\pm 0.002 \% (20 \text{ ppm})$
Load life 8 W at + 25 °C, 2000 hours with heat sink	$\pm 1.0 \% + 0.01 \Omega$	$\pm 0.005 \% (50 \text{ ppm})$	$\pm 0.015 \% (150 \text{ ppm})$
Load life 1.5 W at + 25 °C for 2000 hours in free air	$\pm 1.0 \% + 0.01 \Omega$	$\pm 0.005 \% (50 \text{ ppm})$	$\pm 0.015 \% (150 \text{ ppm})$
High temperature exposure + 150 °C	$\pm 1.0 \% + 0.05 \Omega$	$\pm 0.005 \% (50 \text{ ppm})$	$\pm 0.01 \% (100 \text{ ppm})$

Note

1. Measurement error $\pm 0.001 \Omega$

TABLE 4 - GLOBAL PART NUMBER INFORMATION

NEW GLOBAL PART NUMBER: Y1690420R220T9L (preferred part number format)

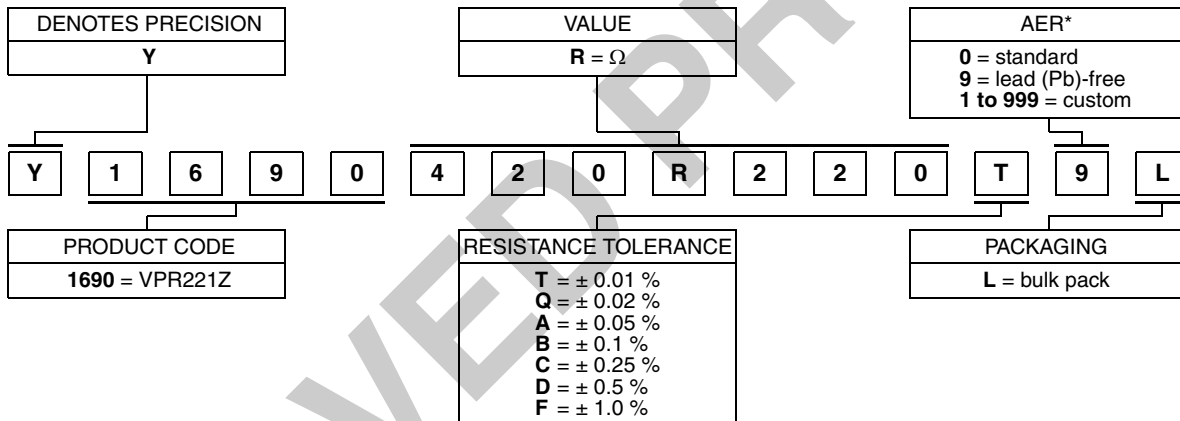

FOR EXAMPLE: ABOVE GLOBAL ORDER Y1690 420R220 T 9 L:

TYPE: VPR221Z

VALUE: 420.22 Ω

ABSOLUTE TOLERANCE: $\pm 0.01 \%$

TERMINATION: Lead (Pb)-free

PACKAGING: Bulk Pack

HISTORICAL PART NUMBER: VPR221Z T 420R22 TCR0.2 T B (will continue to be used)

VPR221Z	T	420R22	TCR0.2	T	B
MODEL	TERMINATION	OHMIC VALUE	TCR CHARACTERISTIC	ABSOLUTE TOLERANCE	PACKAGING
	T = lead (Pb)-free none = tin/lead	420.22 Ω	TCR0.2	T = $\pm 0.01 \%$ Q = $\pm 0.02 \%$ A = $\pm 0.05 \%$ B = $\pm 0.1 \%$ C = $\pm 0.25 \%$ D = $\pm 0.5 \%$ F = $\pm 1.0 \%$	B = bulk pack

Note

* For non-standard requests, please contact Application Engineering.

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

Vishay Precision Group makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, Vishay Precision Group disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on Vishay Precision Group's knowledge of typical requirements that are often placed on Vishay Precision Group products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.