



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

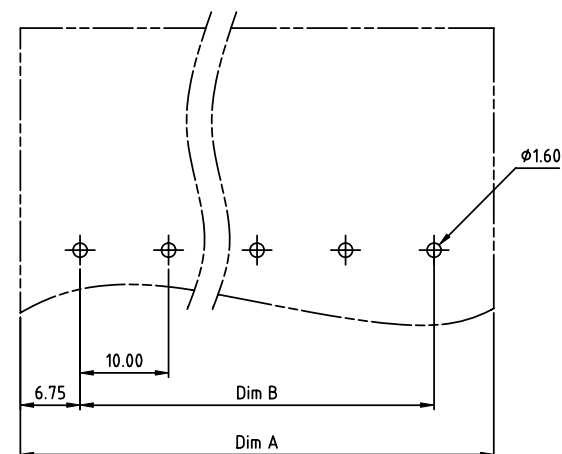
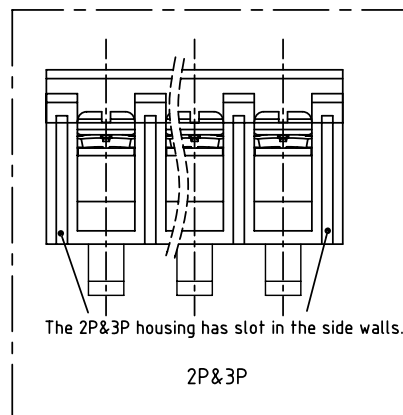
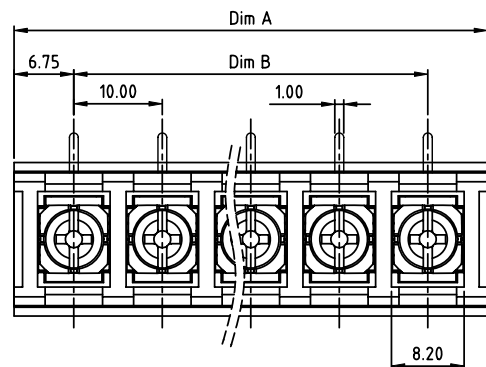
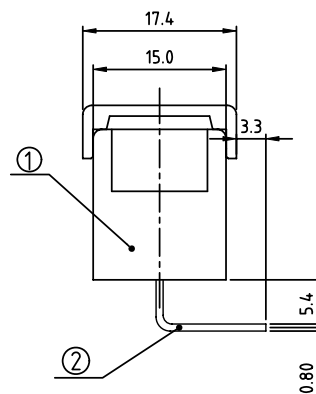
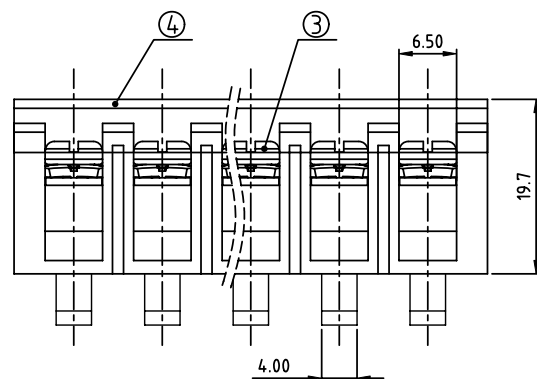


PRODUCT NUMBER

PITCH

YK605xx2x0J0G

10.00mm

RECOMMENDED P.C.B LAYOUT
TOP VIEWMATERIALS ELECTRICAL
RATED VOLTAGE & CURRENT:

300 V, 20 A

WITHSTAND VOLTAGE:

AC 2000 V/Min

INSULATION RESISTANCE:

1000 MΩ OR MORE AT DC 500 V

OPERATING TEMPERATURE RANG:

-40 °C ~ +115 °C

SCREW TORQUE VALUE:

12Lb-In.

WIRE RANGE:

22 - 12 AWG

1) HOUSING:

THERMOPLASTIC, UL 94 V-0 BLACK

2) TERMINAL:

BRASS, 0.8t

3) SCREWS:

STEEL, M3.5

4) COVER MATERIAL:

PC

APPROVAL: C. R. US

DIMENSION

Dim A	N×10.0±3.5
Dim B	(N-1)×10.0

N=Number of poles

Poles	Tolerance
2p-4p	±0.20
5p-10p	±0.30
11p-24p	±0.40
25p-30p	±0.50

PART NO.: YK 605xx 2 x 0 J0G

No. of poles
02 2 poles
03 3 poles
...
30 30 poles

Plated

Code	Terminal	Screw
0	G/F	G/F
1	G/F	Zinc
2	Tin	G/F
3	Tin	Zinc

RoHS compliant
(lead<4%)
In copper Alloy

mat'l. code				surface ASME Y14.5	tolerance ASME Y14.5	projection	product family	
ltr	ecn	no	dr	date	tolerances unless otherwise specified		TERMINAL BLOCK	
					angles	MM	title	
					angle		TERMINAL BLOCK	
					X'±1°	scale	BARRIER TYPE, WITH COVER	
					dr		dwg no	
					enr		YK605xx2x0J0G	
					chr		sheet 1 of 1	
					app		size	
							A4	
							type	
							CUSTOMER Drawing	
sheet index	revision	A						
	sheet	1						