



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




YS5

Y S 5 05A

① ② ③ ④

RoHS

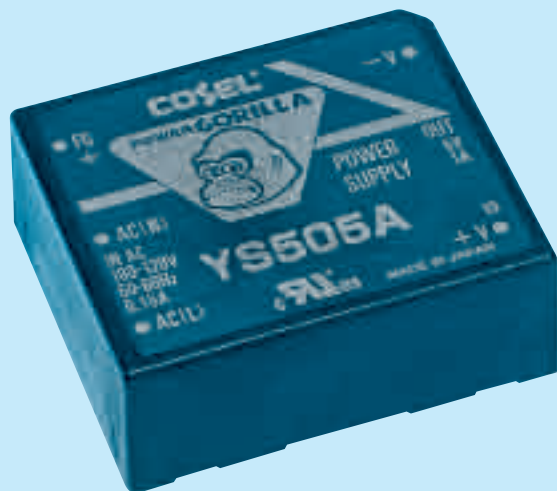

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Output voltage


| | | |
|-----------------------|---------|-----------|
| MODEL | YS505A | YS512A |
| MAX OUTPUT WATTAGE[W] | 5.0 | 5.4 |
| DC OUTPUT | 5V 1.0A | 12V 0.45A |

SPECIFICATIONS

| | MODEL | YS505A | YS512A | |
|------------------------------|---|---|-------------------|-----------------|
| INPUT | VOLTAGE[V] | AC85 - 132 1 ϕ or DC110 - 170 | | |
| | CURRENT[A] | ACIN 100V | 0.15typ (Io=100%) | |
| | FREQUENCY[Hz] | 47 - 440 or DC | | |
| | EFFICIENCY[%] | ACIN 100V | 68typ (Io=100%) | 70typ (Io=100%) |
| | INRUSH CURRENT[A] | ACIN 100V | 15typ (Io=100%) | |
| OUTPUT | VOLTAGE[V] | 5 | 12 | |
| | CURRENT[A] | 1 | 0.45 | |
| | LINE REGULATION[mV] | 20max | 48max | |
| | LOAD REGULATION[mV] | 40max | 100max | |
| | RIPPLE[mVp-p] | *1 80max | 120max | |
| | RIPPLE NOISE[mVp-p] | *1 120max | 150max | |
| | TEMPERATURE REGULATION[mV] | 0 to +55 $^{\circ}$ C | 50max | 150max |
| | START-UP TIME[ms] | 200max (ACIN 85V, Io=100%) | | |
| | OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | Fixed | | |
| OUTPUT VOLTAGE SETTING[%] | \pm 5max (Rated input/output, Ta=25 $^{\circ}$ C) | | | |
| HOLD-UP TIME[ms] | 10typ (ACIN 85V, Io=100%) | | | |
| PROTECTION CIRCUIT | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically | | |
| ISOLATION | INPUT-FG, OUTPUT | AC2,000V 1minute. Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) | | |
| | OUTPUT-FG | AC500V 1minute. Cutoff current = 100mA, DC500V 50M Ω min (At Room Temperature) | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE | -10 to +70 $^{\circ}$ C, 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75 $^{\circ}$ C, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max | | |
| | VIBRATION | 10 - 55Hz, 98.0m/s 2 (10G), 3minutes period, 30minutes each along X, Y and Z axis | | |
| | IMPACT | 490.3m/s 2 (50G), 11ms, once each X, Y and Z axis | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL | | |
| | CONDUCTED NOISE | Complies with FCC-B | | |


*1 Measured by 20MHz oscilloscope.
* Parallel operation with other model is not possible.

External view

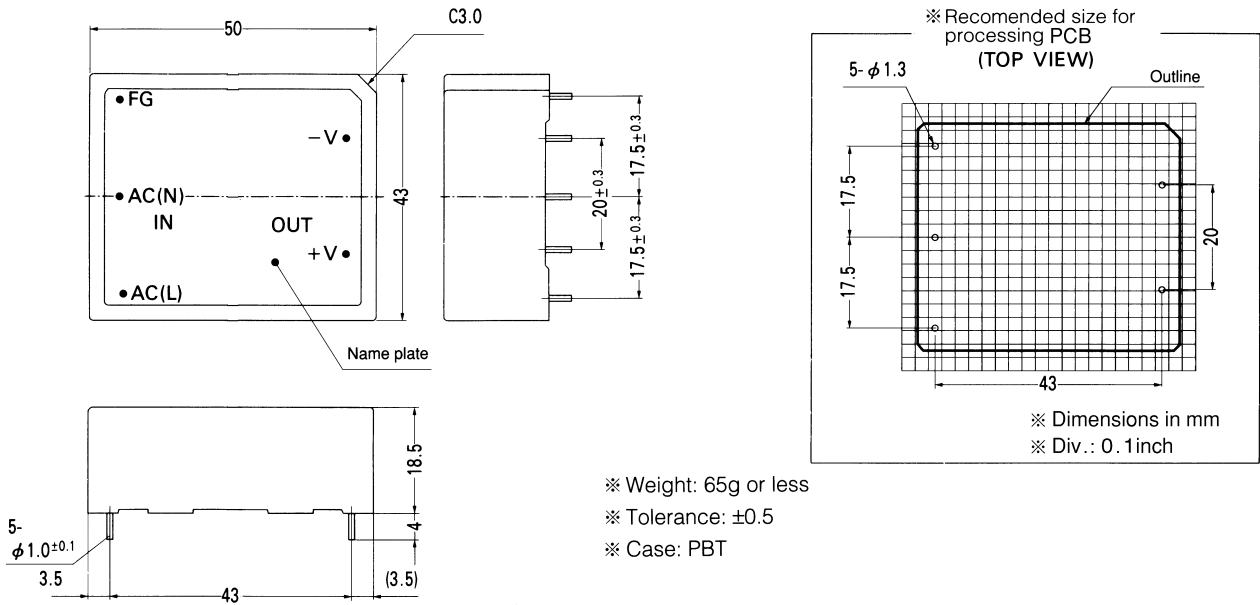


Performance data


■ STATIC CHARACTERISTICS (YS512A)

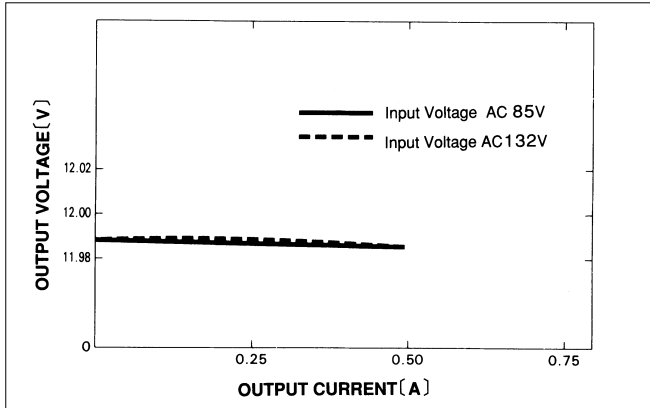


■ RISE TIME & FALL TIME (YS512A)

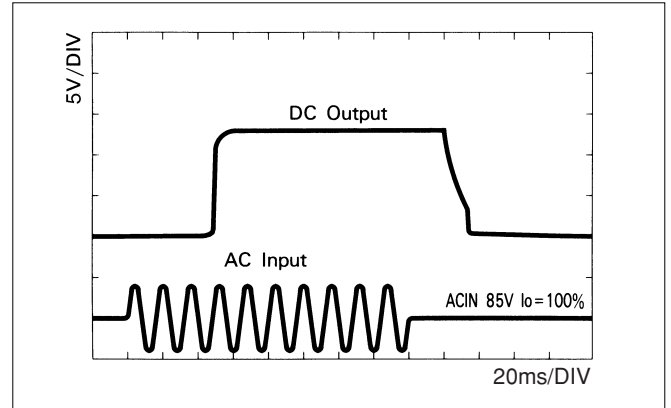

■ OVERCURRENT CHARACTERISTICS (YS512A)

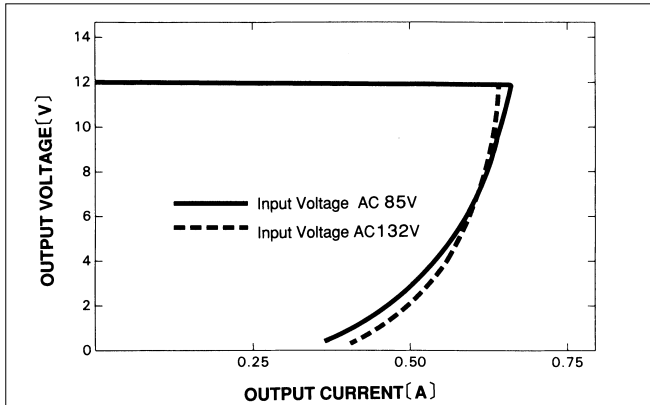

■ DERATING CURVE

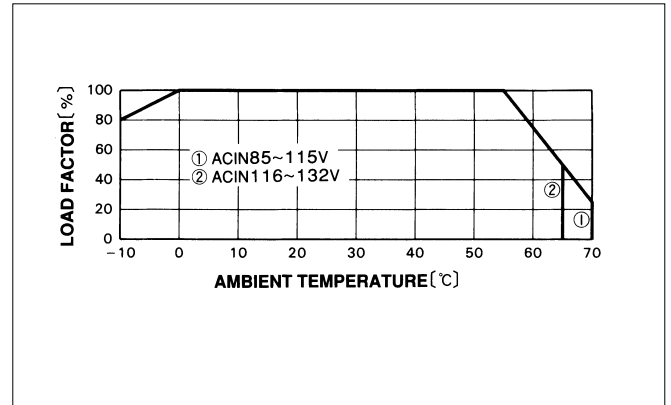

YS10

Y S 10 05A

① ② ③ ④

RoHS



- ① Series name
- ② Single output
- ③ Output wattage
- ④ Output voltage



| | | |
|-----------------------|---------|----------|
| MODEL | YS1005A | YS1012A |
| MAX OUTPUT WATTAGE[W] | 10.0 | 10.8 |
| DC OUTPUT | 5V 2.0A | 12V 0.9A |

SPECIFICATIONS

| | MODEL | YS1005A | YS1012A | |
|------------------------------|--------------------------------------|--|------------------|-----------------|
| INPUT | VOLTAGE[V] | AC85 - 132 1 φ or DC110 - 170 | | |
| | CURRENT[A] | ACIN 100V | 0.3typ (Io=100%) | |
| | FREQUENCY[Hz] | 47 - 440 or DC | | |
| | EFFICIENCY[%] | ACIN 100V | 73typ (Io=100%) | 75typ (Io=100%) |
| | INRUSH CURRENT[A] | ACIN 100V | 15typ (Io=100%) | |
| OUTPUT | VOLTAGE[V] | 5 | 12 | |
| | CURRENT[A] | 2 | 0.9 | |
| | LINE REGULATION[mV] | 20max | 48max | |
| | LOAD REGULATION[mV] | 40max | 100max | |
| | RIPPLE[mVp-p] | *1 80max | 120max | |
| | RIPPLE NOISE[mVp-p] | *1 120max | 150max | |
| | TEMPERATURE REGULATION[mV] | 0 to +55°C | 50max | 150max |
| | START-UP TIME[ms] | 200max (ACIN 85V, Io=100%) | | |
| | OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | Fixed | | |
| OUTPUT VOLTAGE SETTING[%] | ±5max (Rated input/output, Ta=25°C) | | | |
| HOLD-UP TIME[ms] | 10typ (ACIN 85V, Io=100%) | | | |
| PROTECTION CIRCUIT | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically | | |
| ISOLATION | INPUT-FG, OUTPUT | AC2,000V 1minute. Cutoff current = 10mA, DC500V 50MΩmin (At Room Temperature) | | |
| | OUTPUT-FG | AC500V 1minute. Cutoff current = 100mA, DC500V 50MΩmin (At Room Temperature) | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE | -10 to +70°C, 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75°C, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max | | |
| | VIBRATION | 10 - 55Hz, 98.0m/s ² (10G), 3minutes period, 30minutes each along X, Y and Z axis | | |
| | IMPACT | 490.3m/s ² (50G), 11ms, once each X, Y and Z axis | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL | | |
| | CONDUCTED NOISE | Complies with FCC-B | | |

*1 Measured by 20MHz oscilloscope.
* Parallel operation with other model is not possible.


External view

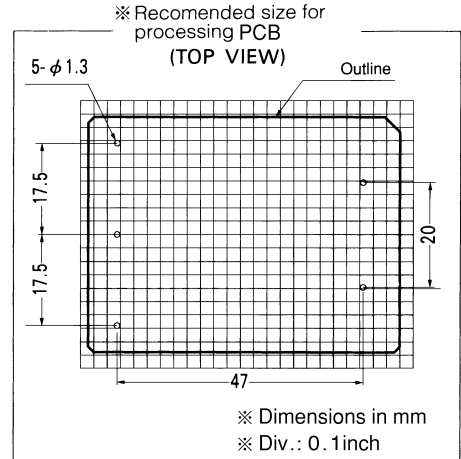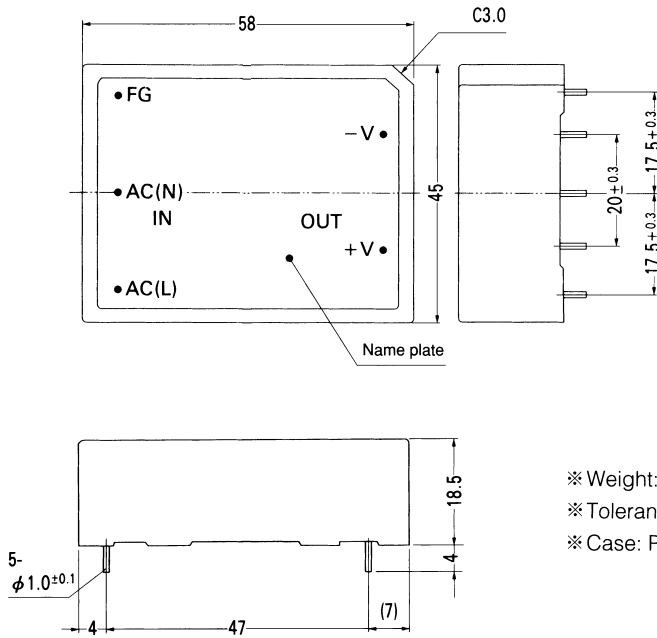


- ※ Weight: 75g or less
- ※ Tolerance: ±0.5
- ※ Case: PBT

Performance data


■ STATIC CHARACTERISTICS (YS1012A)

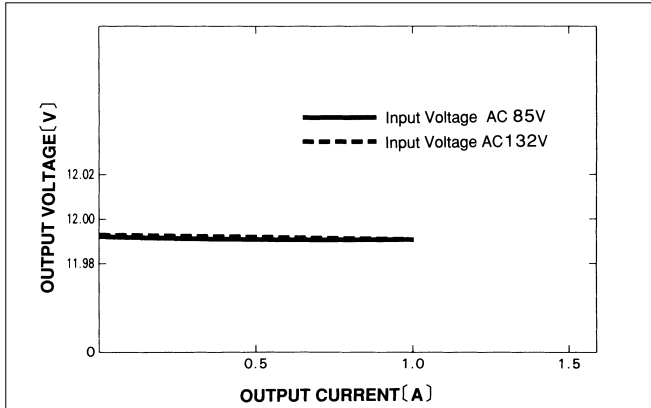


■ RISE TIME & FALL TIME (YS1012A)

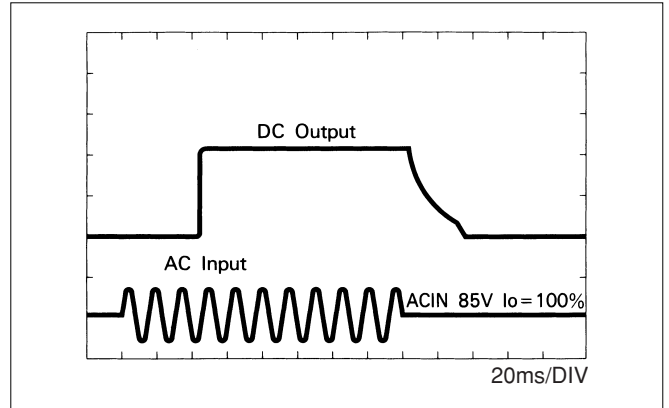

■ OVERCURRENT CHARACTERISTICS (YS1012A)

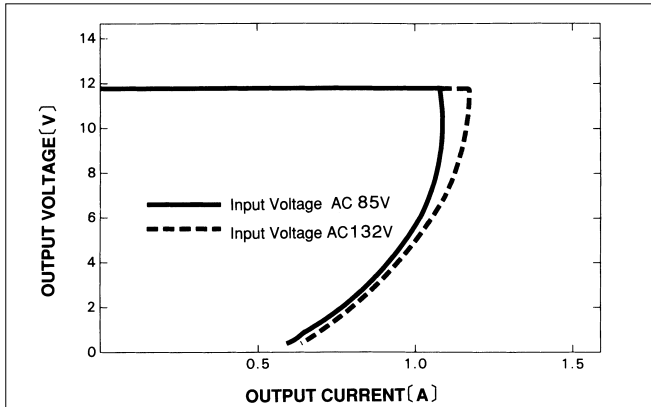

■ DERATING CURVE

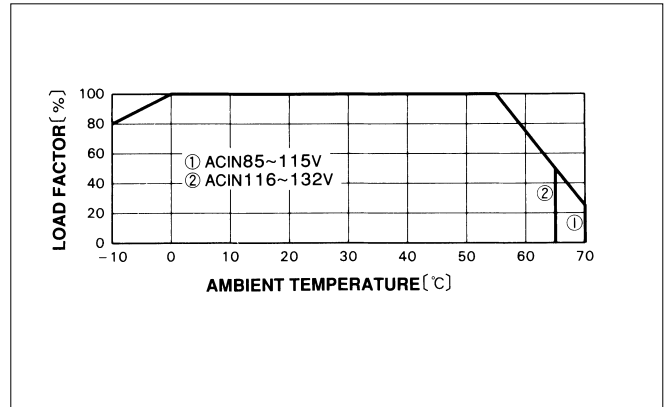

YS15

Y S 15 05A

① ② ③ ④

RoHS

① Series name
② Single output
③ Output wattage
④ Output voltage





| | | |
|-----------------------|---------|----------|
| MODEL | YS1505A | YS1512A |
| MAX OUTPUT WATTAGE[W] | 15.0 | 15.6 |
| DC OUTPUT | 5V 3.0A | 12V 1.3A |

SPECIFICATIONS

| | MODEL | YS1505A | YS1512A | |
|------------------------------|---|---|------------------|-----------------|
| INPUT | VOLTAGE[V] | AC85 - 132 1 ϕ or DC110 - 170 | | |
| | CURRENT[A] | ACIN 100V | 0.4typ (Io=100%) | |
| | FREQUENCY[Hz] | 47 - 440 or DC | | |
| | EFFICIENCY[%] | ACIN 100V | 75typ (Io=100%) | 78typ (Io=100%) |
| | INRUSH CURRENT[A] | ACIN 100V | 25typ (Io=100%) | |
| OUTPUT | VOLTAGE[V] | 5 | 12 | |
| | CURRENT[A] | 3 | 1.3 | |
| | LINE REGULATION[mV] | 20max | 48max | |
| | LOAD REGULATION[mV] | 40max | 100max | |
| | RIPPLE[mVp-p] | *1 80max | 120max | |
| | RIPPLE NOISE[mVp-p] | *1 120max | 150max | |
| | TEMPERATURE REGULATION[mV] | 0 to +55 $^{\circ}$ C | 50max | 150max |
| | START-UP TIME[ms] | 200max (ACIN 85V, Io=100%) | | |
| | OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | Fixed | | |
| OUTPUT VOLTAGE SETTING[%] | \pm 5max (Rated input/output, Ta=25 $^{\circ}$ C) | | | |
| HOLD-UP TIME[ms] | 10typ (ACIN 85V, Io=100%) | | | |
| PROTECTION CIRCUIT | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically | | |
| ISOLATION | INPUT-FG, OUTPUT | AC2,000V 1minute. Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature) | | |
| | OUTPUT-FG | AC500V 1minute. Cutoff current = 100mA, DC500V 50M Ω min (At Room Temperature) | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE | -10 to +70 $^{\circ}$ C, 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75 $^{\circ}$ C, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max | | |
| | VIBRATION | 10 - 55Hz, 98.0m/s ² (10G), 3minutes period, 30minutes each along X, Y and Z axis | | |
| | IMPACT | 490.3m/s ² (50G), 11ms, once each X, Y and Z axis | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL | | |
| | CONDUCTED NOISE | Complies with FCC-B | | |

*1 Measured by 20MHz oscilloscope.
* Parallel operation with other model is not possible.


External view

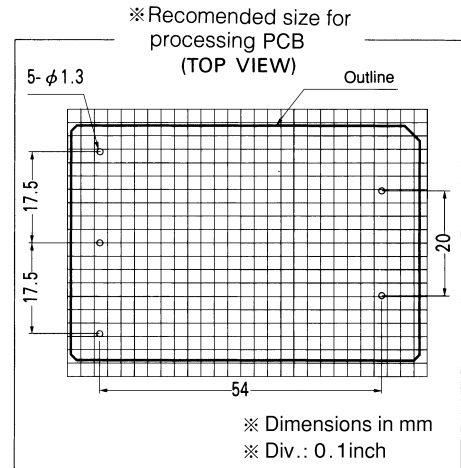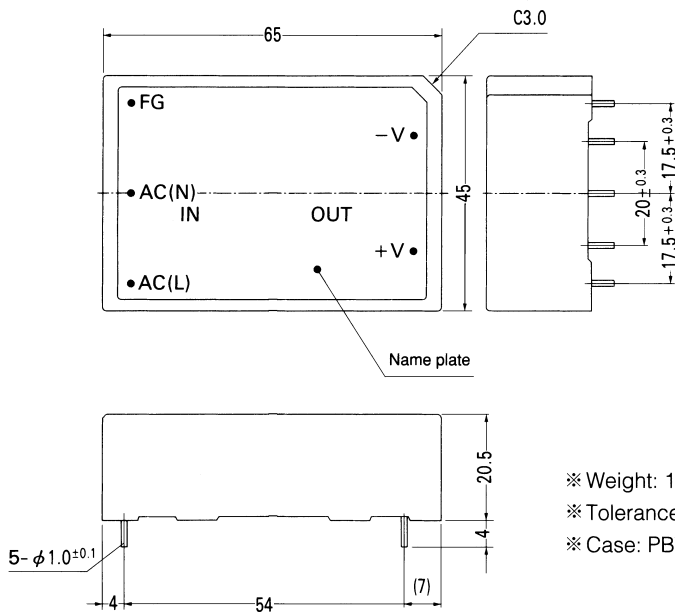


- ※ Weight: 100g or less
- ※ Tolerance: ±0.5
- ※ Case: PBT

Performance data


■ STATIC CHARACTERISTICS (YS1512A)

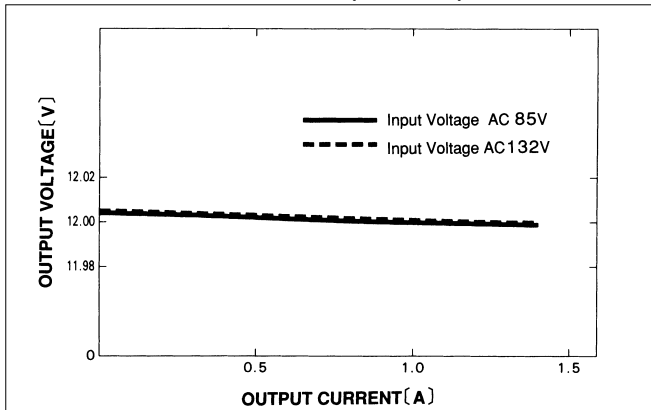

■ RISE TIME & FALL TIME (YS1512A)

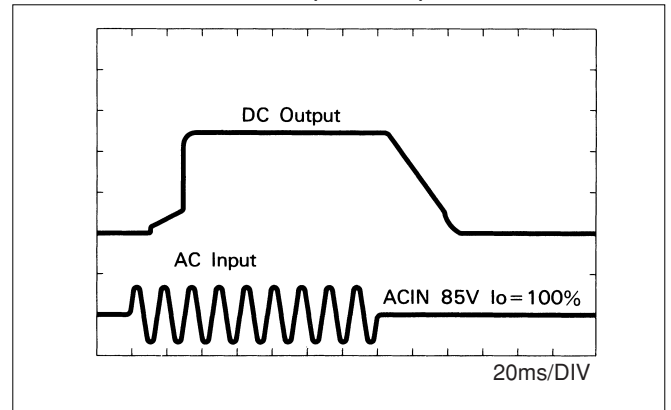

■ OVERCURRENT CHARACTERISTICS (YS1512A)

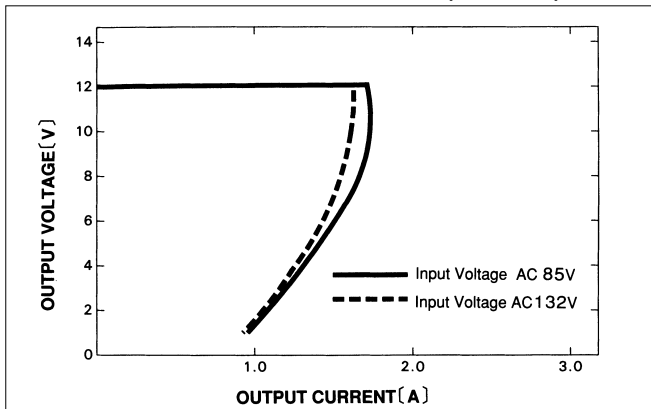

■ DERATING CURVE

