



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Description

The Z-230PJ is a small in-line filter designed to expedite the service delivery and improve the performance of digital subscriber line (DSL) and home phoneline network (HPN) services. This model fits all telephone sets, facsimile machines, answering machines, etc. individually or in groups on line 1 only. Our in-line DSL filter design electronically isolates the high-speed DSL and HPN data streams from the voice band plain old telephone service (POTS) equipment. This design effectively blocks the DSL, and HPN up to 30 Megahertz.

Features

- Isolates telephone equipment impedances from the xDSL and HPN systems
- Attenuate xDSL & HPN signals to phone equipment to prevent conversion to voice band signals
- Attenuate HPN signals to unbalanced phone equipment to prevent radiation into electronic equipment
- Minimize voice band interference transmission, signaling and supervision
- Compatible with all major xDSL standards
- RoHS Compliant
- Compliant and listed with UL 60950, FCC Part 68
- CE certified

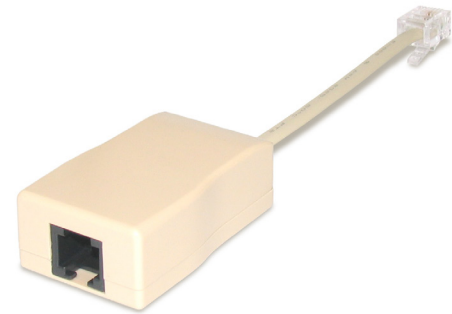


Z-230PJ In-Line xDSL over POTS Filter

Applications

The Z-230PJ filters are used with other Z-BLOCKER® filters distributed throughout the subscribers' premises to isolate all voice band equipment devices such as corded/cordless telephones, answering machines, fax machines, 56Kb/s and lower rate modems, automatic dialers, recorder connectors and satellite television set-top boxes.

The Z-230PJ in-line DSL filter is one of many filters manufactured by Excelsus for subscriber installed digital services within homes, offices, and hotels. Excelsus is the number one selling brand of DSL filters worldwide.

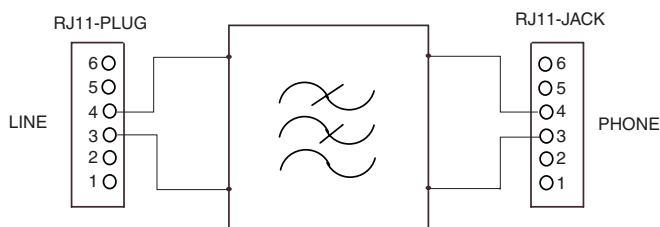

Z-230PJ Block Schematic

Z-BLOCKER® Z-230PJ Filter Specifications

Line side differential input blocking impedance		
At 20 kHz		>2k
At 30 kHz		>3k
From 5 MHz to 10 MHz		>2k
1 kHz insertion loss between 600 Ω resistive		
Single filter		<0.4
With 5 filters		<0.6
1 kHz/2.8 kHz slope between 600 Ω resistive		
Single filter		<0.1
With 5 filters		<1.1
DC resistance in Ohms		
Tip to Tip, and Ring to Ring		<12
Tip to Ring		>10M
Longitudinal Balance per IEEE method		
From 200 - 1 kHz		>58 dB
From 1 kHz - 3 kHz		>53 dB
Common mode rejection at 40 kHz and 30 MHz		>45dB
Low pass roll off (slope) between 600 Ohm and ADSL Transmission Unit - Remote		>26dB
Inter-Modulation Distortion First and Second order products		>60dB
Envelope Delay 300 Hz - 2800 Hz		<100µs
600Ω Return Loss into phone side with 600Ω line termination with ATU-R		
Single filter	SRL Low	>30dB
	ERL	>14dB
	SRL High	>17dB
+2 bridged filter	SRL Low	>36dB
	ERL	>23dB
	SRL High	>13dB
+4 bridged filter	SRL Low	>26dB
	ERL	>15dB
	SRL High	>8dB
Complex* Return Loss with ATU-R		
Single filter	SRL Low	>27dB
Single filter	ERL	>14dB
Single filter	SRL High	>6dB
+2 bridged filters	SRL Low	>19dB
	ERL	>14dB
	SRL High	>3dB
+4 bridged filters	SRL Low	>15dB
	ERL	>7dB
	SRL High	>2dB
* 1330Ω in parallel with (100nfd in series with 348Ω)		
DC Loop Current - Meets specifications between 20 and 100 milliamps DC		
Connectors: RJ-11 Jack and RJ-11 Plug		
RJ11 pins have ≥50 micro-inches of gold plating over ≥100 micro-inches of nickel plating		
Dimensions: Length 2.12in (54mm), Width 1.21in (30.85mm), Height 0.72in (18.34mm), Cable Length = 3.78in (96mm)		
± 1.0 mm on outline dimension. ±10.0 mm on length of cable		
Compliant and listed with UL / CSA 60950, FCC CFR 47 Part 68		