



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





APEX SERIES TRANSCEIVER MODULES

ZAXM-201-1

Integrated Transceiver Modules for ZigBee / IEEE 802.15.4

Evaluation Kit available: ZAXM-201-KIT-1

DESCRIPTION

Apex modules provide a cost-effective RF transceiver solution for 2.4GHz ZigBee and IEEE 802.15.4 data links and wireless networks.

The **ZAXM-201-1** Apex module is based on the Ember™ EM250 platform. It combines Ember's transceiver IC and 16-bit microprocessor with an onboard 100mW Power Amplifier. It's designed to support point to point, point to multi-point, and *EmberZNet* applications.

The APEX module provides over 4000 feet of range and is designed to deliver constant RF output power across the 2.1 to 3.6V voltage input, ensuring consistent performance over the entire life of the battery.

FEATURES

- 1 - 100 mW output power, software controlled
- Designed for EmberZNet networks
- Miniature footprint: 1.00" x 1.275"
- Integrated PCB trace antenna
- Optional MMCX connector for external antenna
- 16 RF channels (Channel 16 operates at reduced power levels)
- Over 4000 feet of range
- Integrated hardware support for Ember InSight Development Environment
- Non-intrusive debug interface (SIF)
- AES 128 bit encryption
- Low power consumption
- Constant RF output power over 2.1–3.6 V voltage range
- FCC, IC, and CE certified
- RoHS compliant

ORDERING INFORMATION

| Part Number | Order Number | Supplying Form |
|--------------------------------|----------------|---|
| ZAXM-200 Series APEX MODULE | ZAXM-201-1 | 100 mW Output power, PCB Trace Antenna |
| | ZAXM-201-1C | 100 mW Output power, with MMCX Connector for use with off board antenna |
| | ZAXM-201-KIT-1 | Engineering Evaluation Kit |

APEX MODULE ZAXM-201-1



- Ember™ EM250 platform
- 128kB Flash memory
- 5kB SRAM
- 16-bit XAP2b microprocessor
- 16 general purpose I/O ports
- DMA – SPI, I²C and UART interfaces
- Integrated ADC with 12-bit resolution

APPLICATIONS

Automated Meter Reading

- In meter applications
- Thermostats
- In-home display units

Home & Building Automation


- Security
- HVAC control
- Lighting control
- Thermostats

Industrial Controls

- Food processing controls
- Traffic Management
- Sensor Networks
- Asset Management
- Barcode reader
- Patient Monitoring
- Glucose monitor



APEX MODULE BLOCK DIAGRAM

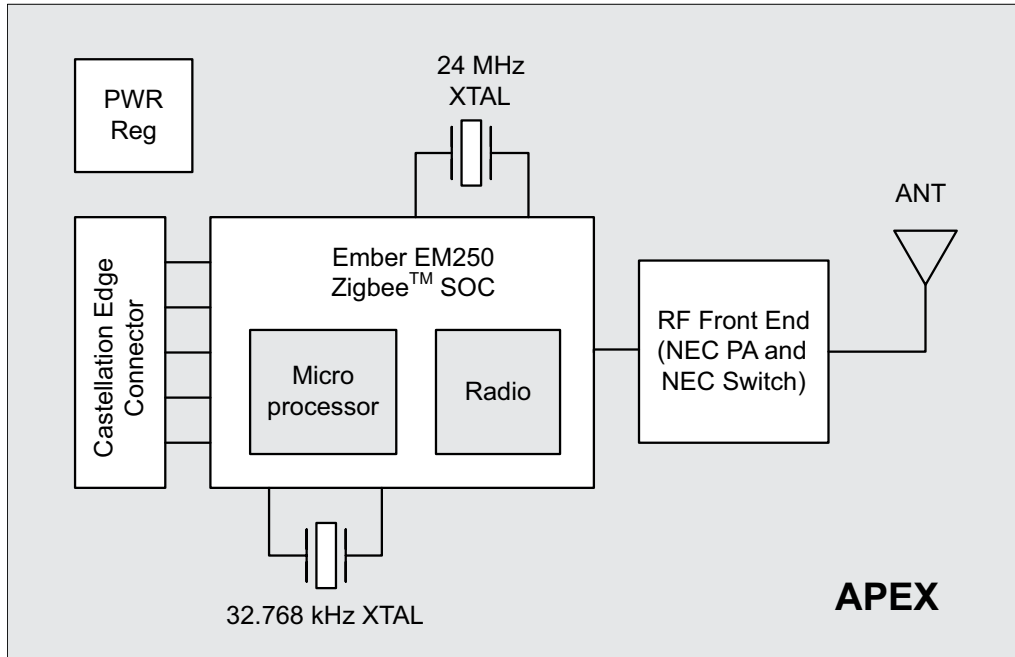

EVALUATION KIT

CEL provides Apex Evaluation Kits to assist users in evaluating Apex and Apex LT modules. The key components of the Apex Evaluation Kit are the interface board and the CEL's Apex radio module.

Apex module combines an Ember EM250 transceiver IC with an NEC high gain Power Amplifier and a high performance NEC RFIC switch.

The interface board features a serial communication interface, a power management module, peripherals such as potentiometer and accelerometer, and GPIO headers. The Evaluation Kit also contains four AA batteries and two USB cables.

For more detail information regarding Apex Evaluation Kit, refer to the **Apex Module Evaluation Kit User Guide** document. (http://www.cel.com/pdf/misc/apexseries_ug.pdf)



- Kit Contents:**
- Evaluation Boards (2)
 - ZigBee Modules (2)
 - USB Cables (2)
 - AA Batteries (4)
 - Technical Information CD (1)

| Order Number | Description |
|----------------|----------------------------|
| ZAXM-201-KIT-1 | Engineering Evaluation Kit |

TABLE OF CONTENTS

Introduction and Overview

Description..... 1
 Features..... 1
 Applications..... 1
 Ordering Information..... 1
 Apex Module Block Diagram..... 2
 Evaluation Kit..... 2

System Level Function

Apex Module Microprocessor..... 4
 Antenna..... 4
 Modes of Operation (TX, RX, Sleep)..... 6
 Processor ACTIVE..... 6
 Processor IDLE..... 6
 Power Amplifier Regulator Control Line..... 7
 SIF Interface..... 7
 Host Protocol Interface Commands..... 7

Electrical Specification

Absolute Maximum Ratings..... 8
 Recommended (Operating Condition)..... 8
 DC Characteristics..... 8
 RF Characteristics..... 9

Pin Signal & Interfaces

Pin Signals I/O Configuration..... 9
 Apex I/O Pin Assignment..... 10
 Apex Module Dimensions..... 11
 PCB Copper Pattern Layout..... 12
 PCB Stencil Pattern..... 12
 PCB Keep-Out Areas..... 13

Processing 14

Agency Certifications 16

Shipment, Storage & Handling 17

References & Revision History 18

APEX MODULE MICROPROCESSOR

APEX modules provide 16 GPIO ports that are shared with other peripheral or alternate functions. The alternate functions can be utilized on a variety of different GPIOs as detailed on the following page in the Table of Pin Assignments. All the GPIO pads are selectable as input, output, or bi-directional and have an internal pull-up or pull-down.


The integrated Serial Controller SC1 can be configured for SPI (master-only), I²C (master-only), or UART functionality. The Serial Controller SC2 can be configured for SPI (master or slave) or I²C (master-only) operation. The integrated ADC can sample analog signals from three GPIO pins single-ended or differentially. The integrated voltage reference VREF for the ADC can be made available to a GPIO port.

Please consult the Ember EM250 datasheet for details on configuring and controlling the information flow of the APEX module interface ports to setup the following:

- GPIO Data Registers
- Alternate function routing
- External Interrupts
- Serial Controller SC1 module (UART mode, SPI Master mode, I²C Master mode)
- Serial Controller SC2 module (SPI modes, I²C Master mode)
- General Purpose Timers
- ADC Module
- Event Manager

ANTENNA

The APEX module includes an integrated PCB trace antenna. An optional MMCX connector can be specified, enabling connection to a 50-ohm external antenna of the user's choice. See Ordering Information.

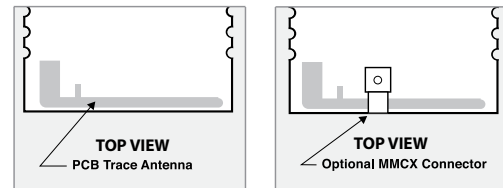

The PCB antenna employs an F-Antenna topology that is compact and supports an omni-directional radiation pattern. To maximize antenna efficiency, an adequate ground plane must be provided on the host PCB. If positioned correctly, the ground plane on the host board under the module can contribute significantly to antenna performance.

The position of the module on the host board and overall design of the product enclosure contribute to antenna performance. Poor design effects radiation patterns and can result in reflection, diffraction, and/or scattering of the transmitted signal. Measured radiation patterns of these modules are available from California Eastern Labs and can be used to benchmark design performance.


Here are some design guidelines to help ensure antenna performance:

- Never place the ground plane or route copper traces directly underneath the antenna portion of the module.
- Never place the antenna close to metallic objects.
- In the overall design, ensure that wiring and other components are not placed near the antenna.
- Do not place the antenna in a metallic or metallized plastic enclosure.
- Keep plastic enclosures 1 cm or more from the antenna in any direction.


ANTENNA (Continued)

Orientation of EUT Peak Gain was in the Horizontal Position. The receiver antenna was in the Horizontal Position.


Frequency = 2405 MHz

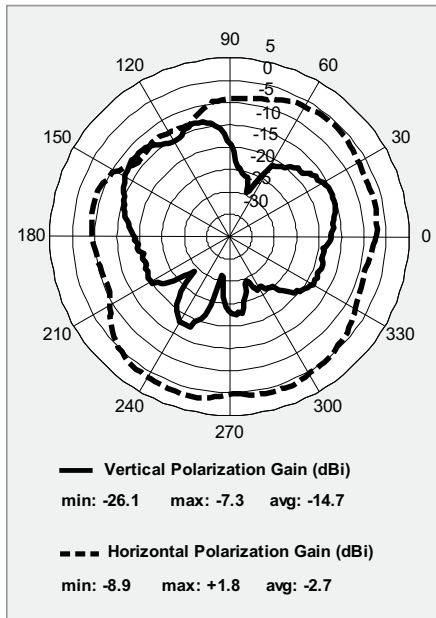

Frequency = 2440 MHz

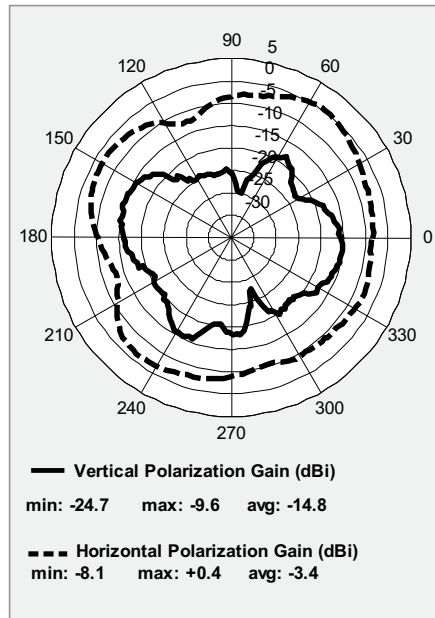

Frequency = 2480 MHz

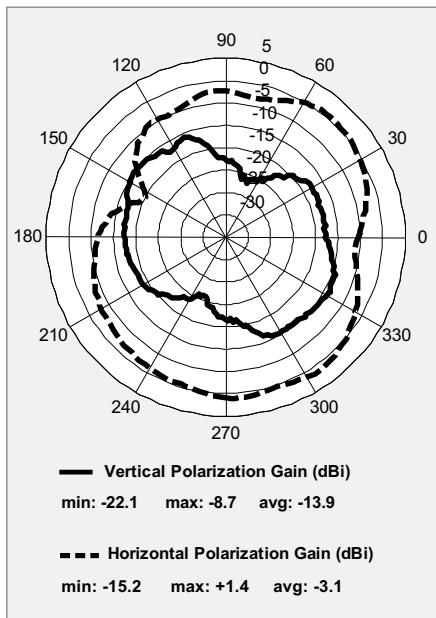

MODES OF OPERATION

The Apex supports three power modes: Processor ACTIVE, processor IDLE, and DEEP SLEEP.

Processor ACTIVE

In this mode all operations are running normally.

Processor IDLE

In this mode the processor stops code execution of the XAP2b microprocessor until any interrupt occurs or external SIF wake up command is seen. The radio is operating normally in this mode.

Deep Sleep

To achieve the lowest power consumption, the module can be set in DEEP SLEEP mode. In this mode most of the functionalities of the modules are turned off with the exception of the critical functions such as GPIO pads and RAM that is powered by the high voltage supply (DCC_PADS).

The module can be taken out of DEEP SLEEP in 3 ways:

- Configuring the sleep timer to generate an interrupt after some periods of time.
- Issuing external interrupt signal.
- Issuing commands through the SIF interface.

In DEEP SLEEP the current consumption of the module will drop to 5.0 μ A (5.5 μ A with optional 32.768kHz oscillator enabled).

For more detail information on modes of operation refer to Ember EM250 datasheet available at Ember's website (www.ember.com)

POWER AMPLIFIER REGULATOR CONTROL LINE

The APEX modules include a separate 1.8V regulator for a power amplifier bias that enables consistent module output performance over the wide 2.1 – 3.6V voltage range. To prevent excessive sleep currents, this regulator should be disabled when the module is in sleep mode. An external pull up resistor option is provided on each module (R6) that allows the regulator to be constantly enabled. This option increases the sleep current of the module to a point well above the specified values.

SPECIFICATIONS – GPIO7 (APEX)

| Parameter | Min | Typ | Max | Unit |
|---------------------------------|------|-----|-----|------|
| Regulator enable voltage | 0.95 | | | V |
| Regulator disable voltage | | | 0.4 | V |
| Enable line current (VEN = 0) | | | 0.1 | μA |
| Enable line current (VEN = VDD) | | | 10 | μA |
| Turn on Time | | | 250 | μsec |

On the APEX module, the regulator control line is connected to the module via the GPIO7 port. The host can drive this port as it does on the APEX LT module, but it can also use the default serial digital function of this port as an external voltage regulator enable. Please consult the EM250 datasheet for details on the operation of this function. Note that both these approaches preclude the use of the GPIO7 port for any other functions, including use as the ADC3 input.

If the application does not put the module to sleep or if sleep current is not an issue, the power amplifier regulator may be permanently enabled by tying the control line high. In this setup, the sleep current will increase by 80μA over the 5μA Standby Current figure provided in Electrical Specifications.

SIF INTERFACE

The APEX module provide access to the SIF module programming and debug interface.

Consult the EM250 datasheet for further details on the following SIF features:

- Production Testing
- Firmware Download
- Product Control and Characterization
- XAP2b Code Development (APEX only)

HOST PROTOCOL INTERFACE COMMANDS

For information on Host Protocol Interface Commands and for other software-related documents refer to Ember’s website:

http://www.ember.com/products_documentation.html

ABSOLUTE MAXIMUM RATINGS

| Rating | Value | Unit |
|----------------------------|-----------------------|------|
| Power Supply Voltage | 3.6 | Vdc |
| Voltage on Any Digital Pin | VDD + 0.3, Max 3.6 | Vdc |
| RF Input Power | +10 | dBm |
| Storage Temperature Range | -45 to 125 | °C |

Note: Exceeding the maximum ratings may cause permanent damage to the module or devices.

RECOMMENDED (OPERATING CONDITIONS)

| Characteristic | Min | Typ | Max | Unit |
|----------------------------|---------|-----|---------|------|
| Power Supply Voltage (VDD) | 2.1 | | 3.6 | V |
| Input Frequency | 2405 | | 2480 | MHz |
| Ambient Temperature Range | -40 | 25 | 85 | °C |
| Logic Input Low Voltage | 0 | | 20% VDD | V |
| Logic Input High Voltage | 80% VDD | | VDD | V |

DC CHARACTERISTICS (@ 25°C, VDD = 3.3V unless otherwise noted)

| Parameter | Min | Typ | Max | Unit |
|---|------------|-----|------------|------|
| Logic Input Low | 0 | | 0.2 x VDD | V |
| Logic Input High | 0.8 x VDD | | VDD | V |
| Logic Output Low | 0 | | 0.18 x VDD | V |
| Logic Output High | 0.82 x VDD | | VDD | V |
| Output source current (standard pad – APEX) | | | 4 | mA |
| Output sink current (standard pad – APEX) | | | 4 | mA |
| Output source current (high current pad – APEX) | | | 8 | mA |
| Output sink current (high current pad – APEX) | | | 8 | mA |
| I/O pin pull-up and pull-down resistor (APEX) | | 30 | | kΩ |
| Power Consumption | | | | |
| <i>Transmit Mode (100mW output):</i> | | | | |
| APEX | | 170 | | mA |
| <i>Receive Mode:</i> | | | | |
| APEX | | 37 | | mA |
| <i>Standby Mode:</i> | | | | |
| 10mW | | | 5 | μA |
| 100mW | | | 5 | μA |

RF CHARACTERISTICS (@ 25°C, VDD = 3.3V unless otherwise noted)

| Parameter | Min | Typ | Max | Unit |
|---|------|-----|--------|------|
| General Characteristics | | | | |
| RF Frequency Range | 2400 | | 2483.5 | MHz |
| RF Data Rate | | 250 | | kbps |
| Microcontroller Operating Frequency | | 12 | | MHz |
| Flash Memory | | 128 | | kB |
| RAM | | 5 | | kB |
| Transmitter | | | | |
| Nominal Output Power | | 20 | | dBm |
| Programmable Output Power Range | | 32 | | dB |
| Error Vector Magnitude | | 15 | 35 | % |
| Receiver | | | | |
| Receiver Sensitivity (1% PER) – normal mode | -92 | -96 | | dBm |
| Receiver Sensitivity (1% PER) – <i>boost mode</i> * | -93 | -97 | | dBm |
| Saturation (Maximum Input Level) (1% PER) | 0 | | | dBm |
| <i>802.15.4 Adjacent Channel Rejection:</i> | | | | |
| APEX | 35 | | | dB |
| 802.15.4 Alternate Channel Rejection | 40 | | | dB |
| <i>802.11 g Rejection (±10 MHz):</i> | | | | |
| APEX | 40 | | | dB |

***Boost Mode** is an optional software-selectable high performance mode designed to increase receiver sensitivity.

Note: Refer to Ember EM250 datasheet for additional details.

PIN SIGNALS I/O PORT CONFIGURATION

The APEX module has a 28 edge I/O interface for connection to the user’s host board. *Figure 1* shows the layout of the 28 edge castellations.

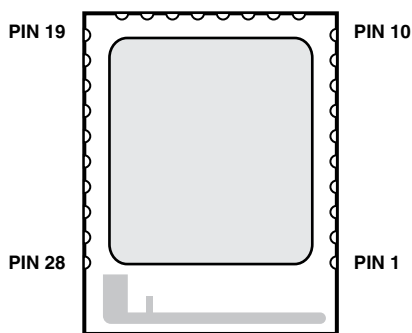


Figure 1 (Top View)

APEX I/O PIN ASSIGNMENTS

| Pin # | Name | Type | Description |
|-------|--------|----------|---|
| 1 | GROUND | GND | Ground |
| 2 | GROUND | GND | Ground |
| 3 | GROUND | GND | Ground |
| 4 | VDD | PI | Power Supply Input |
| 5 | RSTB | DI | Reset, active low |
| 6 | GPIO11 | DI/DO | General Purpose Digital I/O, SC1 UART CTS, SC1 SPI master clock, or Capture Input A of Timer 2 |
| 7 | GPIO12 | DI/DO | General Purpose Digital I/O, SC1 UART RTS, or Capture Input B of Timer 2 |
| 8 | GPIO0 | DI/DO | General Purpose Digital I/O, SC2 SPI MOSI, or Capture Input A of Timer 1 |
| 9 | GPIO1 | DI/DO | General Purpose Digital I/O, SC2 SPI MISO, SC2 I ² C SDA, or Capture Input A of Timer 2 |
| 10 | GPIO2 | DI/DO | General Purpose Digital I/O, SC2 SPI master clock, SC2 I ² C SCL, or Capture Input B of Timer 2 |
| 11 | GPIO3 | DI/DO | General Purpose Digital I/O, SC2 SPI slave select, or Capture Input B of Timer 1 |
| 12 | GPIO4 | DI/DO/AI | General Purpose Digital I/O, ADC Input 0, or PTI frame signal |
| 13 | GPIO5 | DI/DO/AI | General Purpose Digital I/O, ADC Input 1, or PTI data signal |
| 14 | GPIO6 | DI/DO/AI | General Purpose Digital I/O, ADC Input 2, Timer 2 Clock Input, or Timer 1 Enable |
| 15 | GPIO7 | DO | Regulator Enable, active high (see section of "Power Amplifier Regulator Control Line") |
| 16 | GPIO8 | DI/DO/AO | General Purpose Digital I/O, ADC Reference Output, Timer 1 Clock Input, Timer 2 Enable, or Source A Interrupt |
| 17 | GPIO9 | DI/DO | General Purpose Digital I/O, SC1 TXD, SC1 MO, SC1 I ² C Data, or Capture Input A of Timer 1 |
| 18 | GPIO10 | DI/DO | General Purpose Digital I/O, SC1 RXD, SC1 MI, SC1 I ² C Clock, or Capture Input B of Timer 1 |
| 19 | CLK | DI | SIF Interface clock |
| 20 | MISO | DO | SIF Interface master in/slave out |
| 21 | MOSI | DI | SIF Interface master out/slave in |
| 22 | LOADB | DI/DO | SIF Interface load strobe |
| 23 | GPIO16 | DI/DO | General Purpose Digital I/O, Output B of Timer 1, Capture Input B of Timer 2, or Source D Interrupt |
| 24 | GPIO15 | DI/DO | General Purpose Digital I/O, Output A of Timer 1, Capture Input A of Timer 2, or Source C Interrupt |
| 25 | GPIO14 | DI/DO | General Purpose Digital I/O, Output B of Timer 2, Capture Input B of Timer 1, or Source B Interrupt |
| 26 | GPIO13 | DI/DO | General Purpose Digital I/O, Output A of Timer 2, or Capture Input A of Timer 1 |
| 27 | GROUND | GND | Ground |
| 28 | GROUND | GND | Ground |

Unused I/O pins should be left unconnected and the pin state set via the Host Protocol.

DI = Digital Input

PI = Power Input


DO = Digital Output

GND = Ground

AI = Analog Input


AO = Analog Output

DIMENSIONS: ZAXM-201-1 Apex Dimensions in inches. Tolerances = +/-0.005" unless otherwise noted.

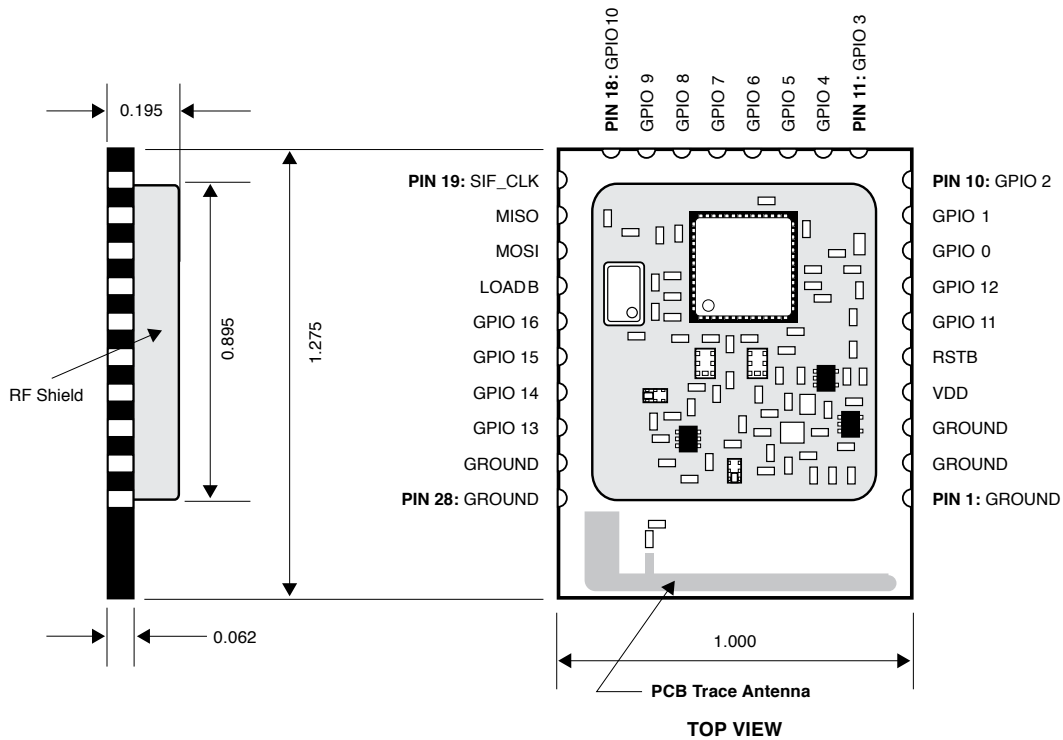


DIMENSIONS: ZAXM-201-1C Apex with Optional MMCX Connector

Dimensions in inches. Tolerances = +/-0.005" unless otherwise noted.

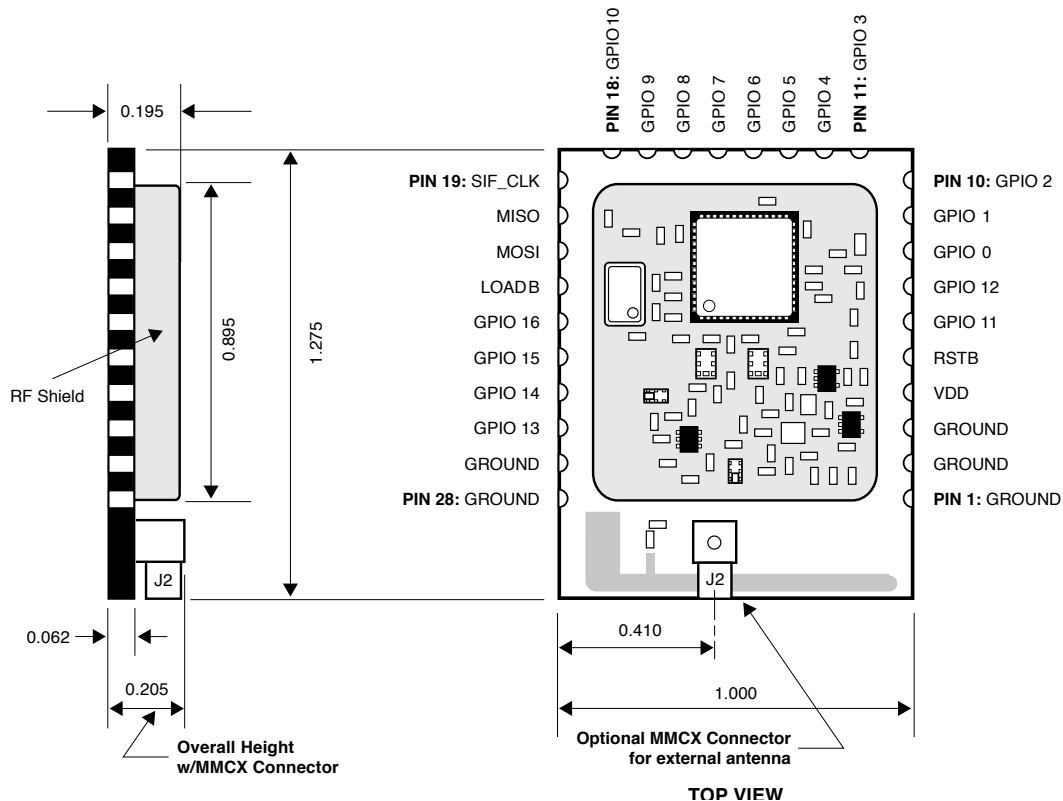

PCB Keep-out areas: Apex

Dimensions in inches. Tolerances = +/-0.005" unless otherwise noted.

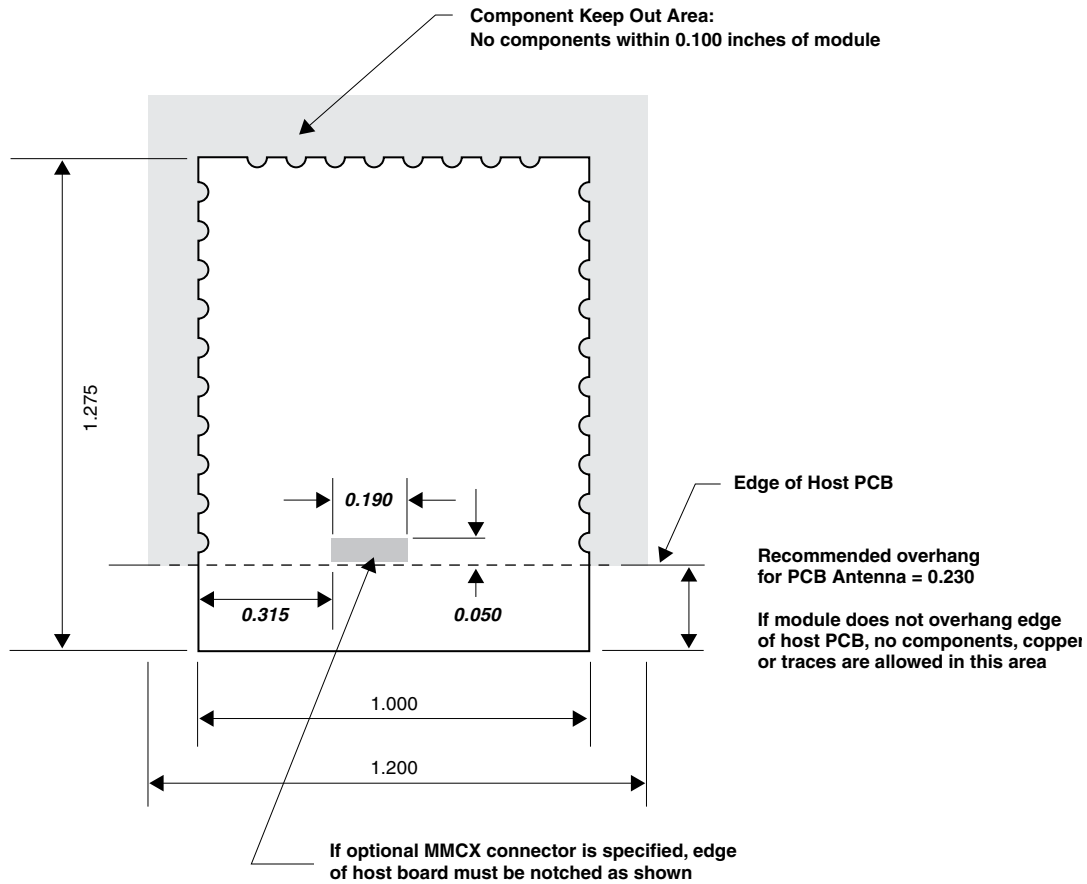

For optimum antenna performance, The APEX module should be mounted with the PCB trace antenna overhanging the edge of the host board. To further improve performance, a ground plane may be placed on the host board under the module, up to the PCB edge. The installation of an uninterrupted ground plane on a layer directly beneath the module will also allow you to run traces under this layer. CEL can provide assistance with your PCB layout.

PROCESSING

Recommended Reflow Profile

Parameters Values

| | |
|---------------------------------------|-------------|
| Ramp up rate (from Tsoakmax to Tpeak) | 3°/sec max |
| Minimum Soak Temperature | 150°C |
| Maximum Soak Temperature | 200°C |
| Soak Time | 60-120 sec |
| TLiquidus | 217°C |
| Time above TL | 60-150 sec |
| Tpeak | 260 + 0°C |
| Time within 5° of Tpeak | 20-30 sec |
| Time from 25° to Tpeak | 8 min max |
| Ramp down rate | 6°C/sec max |

Achieve the brightest possible solder fillets with a good shape and low contact angle.

Pb-Free Soldering Paste

Use of “No Clean” soldering paste is strongly recommended, as it does not require cleaning after the soldering process.

Note: The quality of the solder joints on the castellations (‘half vias’) where they contact the host board should meet the appropriate IPC specification. See IPC-A-610-D Acceptability of Electronic Assemblies, section 8.2.4 Castellated Terminations.

Cleaning

In general, cleaning the populated modules is strongly discouraged. Residuals under the module cannot be easily removed with any cleaning process.

- Cleaning with water can lead to capillary effects where water is absorbed into the gap between the host board and the module. The combination of soldering flux residuals and encapsulated water could lead to short circuits between neighboring pads. Water could also damage any stickers or labels.
- Cleaning with alcohol or a similar organic solvent will likely flood soldering flux residuals into the two housings, which is not accessible for post-washing inspection. The solvent could also damage any stickers or labels.
- Ultrasonic cleaning could damage the module permanently.

The best approach is to consider using a “no clean” soldering paste and eliminate the post-soldering cleaning step.

Optical Inspection

After soldering the Module to the host board, consider optical inspection to check the following:

- Proper alignment and centering of the module over the pads.
- Proper solder joints on all pads.
- Excessive solder or contacts to neighboring pads, or vias.

PROCESSING *(Continued)*

Repeating Reflow Soldering

Only a single reflow soldering process is encouraged for host boards.

Wave Soldering

If a wave soldering process is required on the host boards due to the presence of leaded components, only a single wave soldering process is encouraged.

Hand Soldering

Hand soldering is possible. Use a soldering iron temperature setting equivalent to 350°C, follow IPC recommendations/ reference document IPC-7711.

Rework

The Apex LT Module can be unsoldered from the host board. Use of a hot air re-work tool and hot plate for pre-heating from underneath is recommended. Avoid overheating.

!Warning Never attempt a rework on the module itself, e.g. replacing individual components. Such actions will terminate warranty coverage.

Additional Grounding

Attempts to improve module or system grounding by soldering braids, wires, or cables onto the module RF shield cover is done at the customers own risk. The numerous ground pins at the module perimeter should be sufficient for optimum immunity to external RF interference.

AGENCY CERTIFICATIONS

FCC Part 15.247 Module Certified (Mobile)

The APEX modules comply with Part 15 of the Federal Communications Commission rules and regulations. To meet the FCC Certification requirements, the user must meet these regulations:

- The text on the FCC ID label provided with the module must be placed on the outside of the final product.
- The modules may only use the antennas that have been tested and approved with these modules:
 - The on-board PCB trace antenna
 - Nearson S131CL-5-RMM-2450S antenna.

To meet the Section 15.209 emission requirements in the restricted frequency bands of Section 15.205, the transceiver transmitter power for the APEX (EM250) module needs to be reduced from the typical maximum setting on the upper two channels (2475 MHz and 2480 MHz). Maximum values are TBD.

Per Section 2.109, the APEX module have been certified by the FCC for use with other products without additional certification. Any modifications to this product may violate the rules of the Federal Communications Commission and make operation of the product unlawful.

Per Sections 15.107 and 15.109, the user's end product must be tested for unintentional radiators compliance.

Per Section 47 C.F.R. Sec.15.105(b), The APEX module is certified as mobile devices for the FCC radiation exposure limits set forth for an uncontrolled environment. The antennas used with this module must be installed to provide a separation distance of at least 8 inches (20cm) from all persons. If the module is to be used in a handheld application, the user is responsible for passing additional FCC part 2.1091 rules (SAR) and FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields, OET Bulletin and Supplement C.

IC Certification – Canada

The APEX module is IC certified. The labeling requirements for Industry Canada are similar to those of the FCC. A visible label on the outside of the final product must display the IC labeling. The user is responsible for the end product to comply with IC ICES-003 (Unintentional radiators).

CE Certification – Europe

The APEX module is CE certified. The CE marking must be affixed legibly and indelibly to a visible location on the user's product.

FCC Approved Antennas

- **Integrated PCB trace antenna**
- **Nearson S131CL-5-RMM-2450S** – A 2.4GHz Dipole antenna with a 5 inch cable and a right angle MMCX connector.

SHIPMENT, HANDLING, AND STORAGE

Shipment

The Apex Module is delivered in trays of 32. Each package consists of 5 trays and therefore the total module quantity per package is 160.

Handling

The Apex Module is designed and packaged to be processed in an automated assembly line.

!Warning The Apex Module contains a highly sensitive electronic circuitry. Handling without proper ESD protection may destroy or damage the module permanently.

!Warning According to JEDEC ISP, the Apex Module is moisture sensitive devices. Appropriate handling instructions and precautions are summarized in Section 2.1. Read carefully to prevent permanent damage due to moisture intake.

Moisture Sensitivity Level (MSL)

MSL 3, per J-STD-033

REFERENCES & REVISION HISTORY

References

| Reference Documents |
|---------------------------------------|
| Apex Module Evaluation Kit User Guide |
| Ember EM250 Datasheet (June 29, 2007) |

Revision History

| Previous Versions | Changes to Current Version | Page |
|---|---|-------|
| 0002/3-00-07-00-000 (Issue A) May 7, 2008 | Initial preliminary datasheet. | N/A |
| 0002-00-07-00-000 (Issue B) January 22, 2009 | Datasheet Unification for ZigBee product line | N/A |
| 0002-00-07-00-000 (Issue C) April 29, 2010 | The following corrections/changes were made: On page 11, pin 10 was changed from GND to GPIO2 and the module height was changed from 0.162" to 0.195". On page 6, the deep sleep mode current consumption was changed to 5.0µA. | 6, 11 |

Disclaimer

- The information in this document is current as of the published date. The information is subject to change without notice. For actual design-in, refer to the latest publications of CEL data sheets or data books, etc., for the most up-to-date specifications of CEL products. Not all products and/or types are available in every country. Please check with an CEL sales representative for availability and additional information.
- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of CEL. CEL assumes no responsibility for any errors that may appear in this document.
- CEL does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of CEL products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of CEL or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. CEL assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While CEL endeavors to enhance the quality, reliability and safety of CEL products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in CEL products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.