



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



HIGH DENSITY LED FLEX RIBBON

Features

VOLTAGE: 24V DC
 CURRENT: 1440mA
 LED VIEWING ANGLE (2 θ 1/2): 120°

STANDARD PACKAGING:
 4 Meter Reel (480 LED's)

OPTIONAL PACKAGING:
 Individual 500mm Sections (60 LED's)
 Order as ZFS-84000-XX/SEC
 Note: Individual Sections ARE NOT supplied
 with insulated wire connection.



Maximum Ratings

Parameter	Symbol	Rating	Units
LED Junction Temperature	T_J	125	°C
Operating Temperature	T_{opr}	-30 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +100	°C
ESD Sensitivity	V_B	1000	V

Accessories

ZPS-2435 24V, 35 Watt Power Supply
 ZPS-2460 24V, 60 Watt Power Supply
 ZDM-01 PWM LED Dimmer

Note: ZPS-2435 and ZPS-2460 require
 use of wire nuts for connections.

Electro-Optical Characteristics (Ta = 25°C)

JKL Part Number	Color	Number of LED's	Input Voltage (V DC)	Power (W)	Current (mA)	Radiance Angle	CCT (K)	Lumen Flux (lm)
ZFS-84000-CW	Cool White	480	24	34.56	1440	120°	6000	2200
ZFS-84000-NW	Neutral White	480	24	34.56	1440	120°	4100	2070
ZFS-84000-WW	Warm White	480	24	34.56	1440	120°	3050	1940

Note


Please refer to JKL Application Sheet JKL-AS-ZFS-LED FLEX
 for Installation and Power Recommendations.



ATTENTION

OBSERVE PRECAUTION FOR
 HANDLING ELECTROSTATIC
 DISCHARGE SENSITIVE DEVICES


I	DELETE MATING COMPONENTS	1/6/14
H	CHANGE LUMEN FLUX NO'S	10/29/12
G	ADD ACCESSORIES & NOTES	8/22/11
F	ADD WIRE TYPE AND SIZE	6/27/11
E	NEW LAYOUT & PHOTO	5/24/11
D	CHNG TO ZPS-2435 POWER SUPPLY & PHOTO	4/15/11
C	CORRECT LINE DRAWING	4/5/11
B	CORRECT DIM LINE ON LED HT.	3/29/11
A	WIRE DIMS TO REF. & ADDED TO FEATURES	11/10/10
	RELEASED AND CANCEL PL-0903-07	11/10/10
REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE

METRIC	DIMENSIONS ARE IN mm (INCHES)
	TOLERANCE UNLESS OTHERWISE SPECIFIED
	1 PL +/- REF.
	2 PL +/- REF.
	ANGLE +/-
THIRD ANGLE PROJECTION	
DRAWN BY	APPV'D BY DATE
L. WENGSTROM	L.R. 1/6/14
- CAD DRAWING -	
MANUAL REVISIONS NOT PERMITTED	

JKL COMPONENTS CORPORATION					
TITLE HIGH DENSITY LED FLEX RIBBON, 24V					
SIZE	FSCM NO.	DRAWING NO.	ZFS-84000 MULTI		
A	55335				
SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET	
NONE	11/10/10	1/6/14	I	1 OF 2	

HIGH DENSITY LED FLEX RIBBON

Dimensions

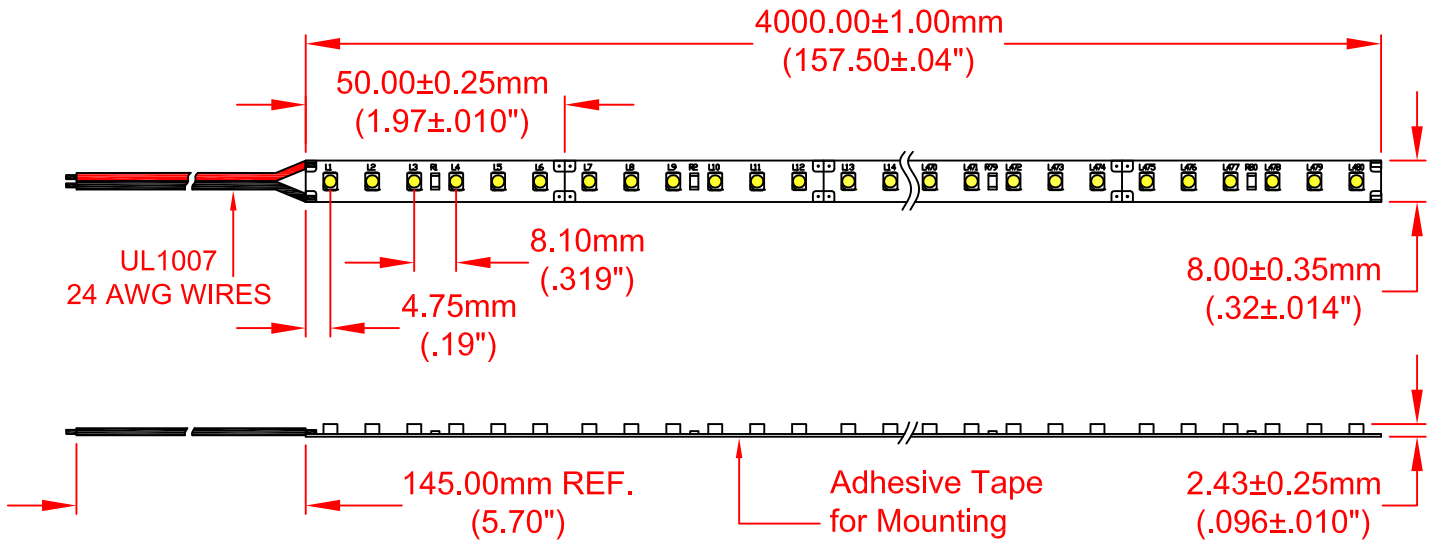

Circuit Diagram

