



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Oxyride Dry Battery AA type

ZR6XT



※ Label will vary.

Specifications

Model number	ZR6XT
Nominal voltage	1.5V (Initial Voltage : 1.7V)
Approximate weight	23g
Terminal	♀ cap ♂ base
Insulation of terminal and exterior	10MΩ (500V.D.C)
Externals size	Height 50.5($\begin{smallmatrix} +0 \\ -1.3 \end{smallmatrix}$)mm
	Diameter 14.5($\begin{smallmatrix} +0 \\ -1.0 \end{smallmatrix}$)mm

Caution

Since the initial voltage is higher than standard batteries (1.7V), Oxyride batteries may not be compatible with all electronic equipment.

Electronic equipment containing a remaining capacity indicator may not function properly when using Oxyride batteries.

When Oxyride batteries are used with an external-type camera flash, the flash may not respond, or the flash may retain more heat compared to use with Alkaline batteries.


When equipment that operates on rechargeable batteries is changed with Oxyride batteries, the equipment may retain more heat compared to charging with Alkaline batteries.

Do not use oxyride batteries with flashlights or headlamps that use standard light bulbs, excessive current will flow which will produce a bright light but reduce the life of the bulb and/or generate heat which may cause the bulb housing to warp.


Oxyride batteries may not function in certain clocks.

※ The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.


Dimensions

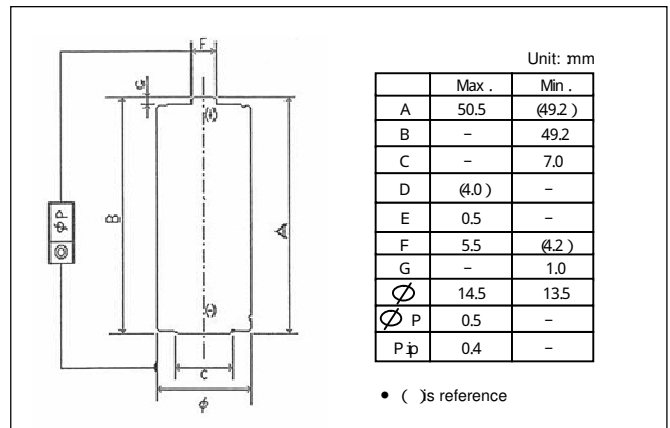







Discharge characteristic (20°C ± 2°C)

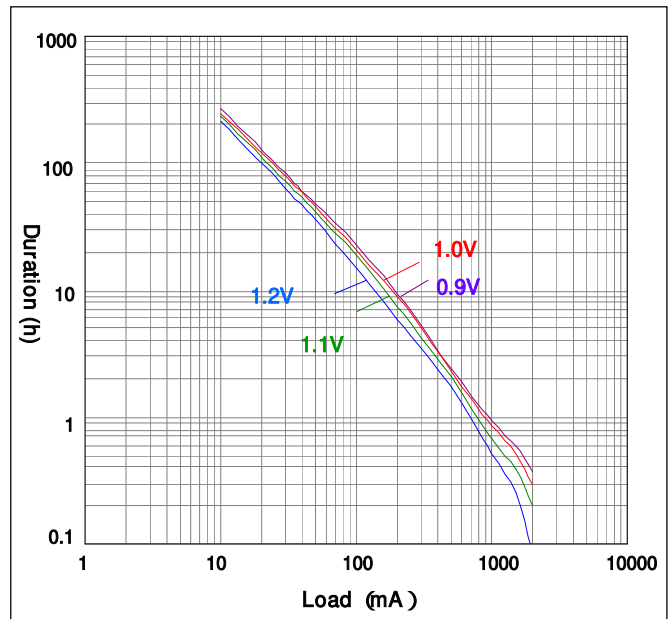

Temperature characteristic

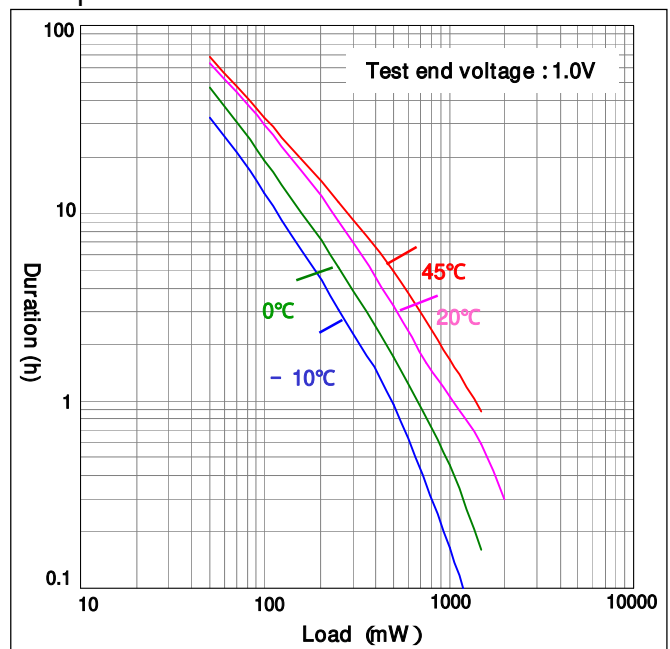

Discharge Curves

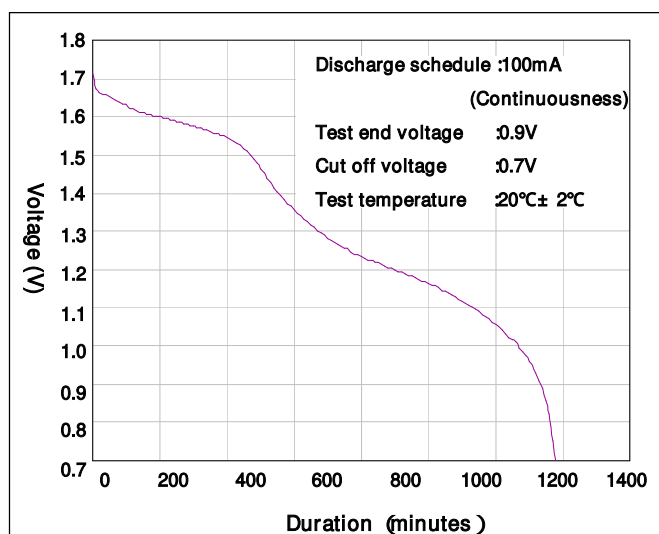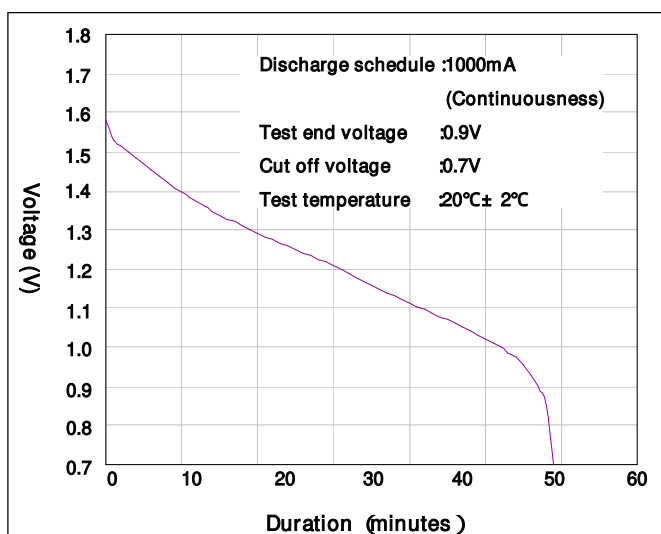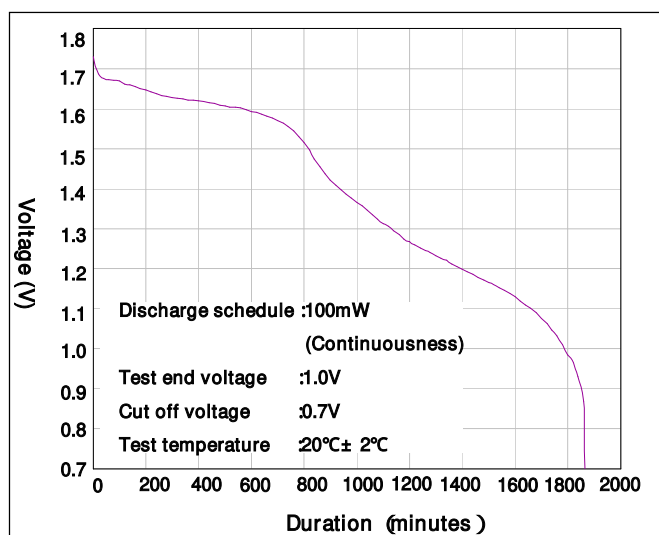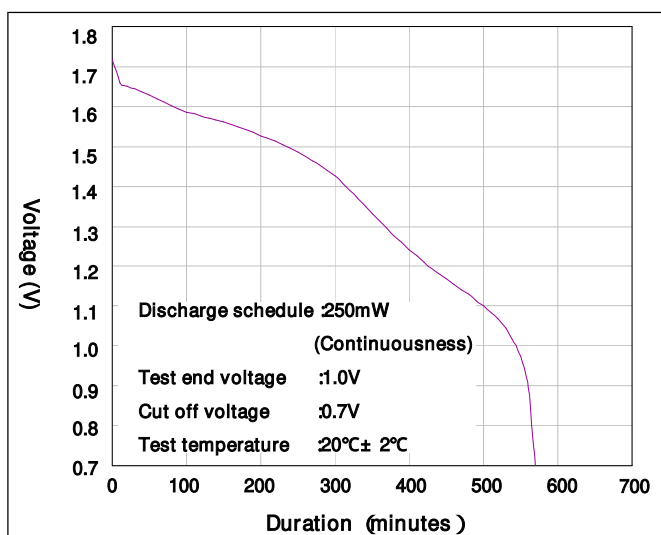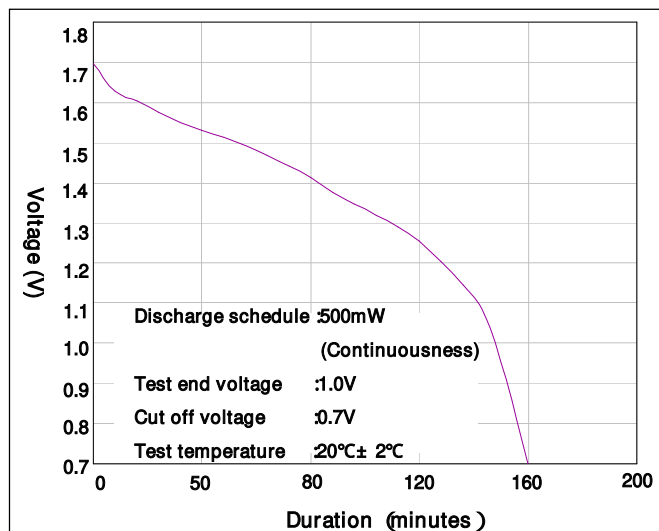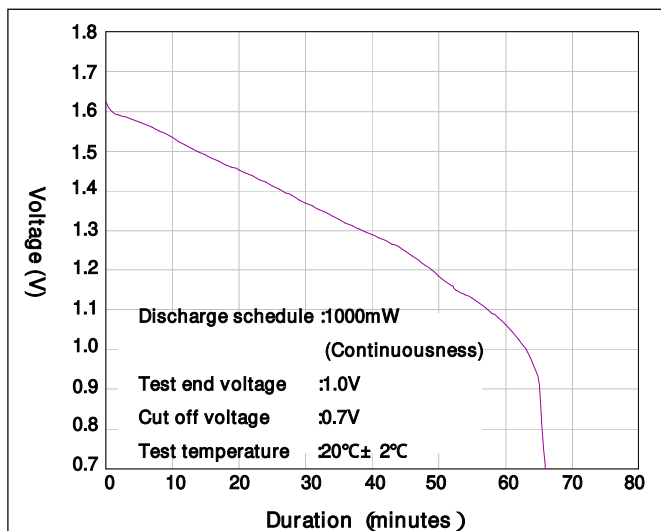

※ The data in this document are for descriptive purposes only and are not intended to make or imply any guarantee or warranty.