

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

Type ZR Series

Key Features

- Suited to Automatic Insertion
- Withstand to 500 Volts
- Two Element Styles Available
- Available in Two Case Sizes




The TE Connectivity Series of Zerohm links are available in two standard case sizes and element types. No end caps are used for the steel element, terminations are welded directly on to the steel slug. For the Ceramic elements, tinned copper wire leads are welded onto end caps. This manufacturing process allows for very low resistance values to be achieved. The slugs are then finished by applying three coats of light brown epoxy resin.

Characteristics - Electrical

	ZR0204	ZR0207
Power Rating:	0.125W	0.25W
Current Rating:	25A at 25°C derating to zero at 150°C	
Current Carrying Capacity:	Fusing rating of copper wire leads	
Resistance Max:	Steel - <0.002 ohms	Ceramic - <0.02 ohms
Operating Temperature Range:	-55°C to +125°C	
Climatic Category:	55/155/56	
Dielectric Strength:	500 Volts	
Insulation Resistance Minimum Dry:	10G Ohms	

Dimensions

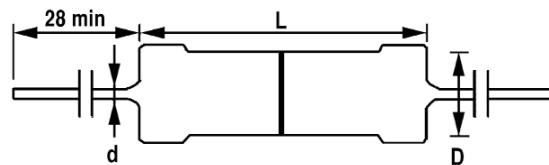

Style	L Max	D max	d (nom) ±0.05
ZR0204	3.5	1.85	0.45
ZR0207	6.8	2.5	0.54

Type ZR Series

Marking

Both ZR0204 Zerohm Links and ZR0207 Zerohm Links are marked with a single narrow black band at the centre of the body.

Mounting

The resistors are suitable for processing on automatic insertion equipment and cutting and bending machines.

Packaging

ZR0204 Zerohm Links are axially taped and packed in boxes of 5000.

ZR0207 Zerohm Links are axially taped and packed in boxes of 4000.

How to Order

ZR	0204	C	RL
Common Part	Power Rating	Element	Packaging
ZR - Zerohm Links	0204 - 0.125W 0207 - 0.25W	C - Ceramic T - Steel	- Boxed RL - Reeled