



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Microsemi Adaptec® Series 8 Family: 81605Z/Q, 8885/Q, 8805, 8405

12 Gbps PCIe Gen3 High-Port SAS/SATA RAID Adapters

Maximum Performance

Data center, IT, and general consumer server environments have a broad range of requirements—from basic connectivity to extreme data storage capacities. The effectiveness at which their data is accessed and protected is crucial to their ultimate success. The 12 Gbps PCIe Gen3 Series 8 RAID adapters, coupled with 12 Gbps SSDs, provide maximum read/write bandwidth and IOPS for the most performance-hungry transactional and database applications.

Series 8Q with Microsemi Adaptec maxCache 3.0

Advancing the performance capabilities of SSD caching to a broader set of application workloads, the Series 8Q with maxCache 3.0 supports read- and write-back caching. By caching writes to a redundant SSD cache pool (RAID1, RAID1E, or RAID5), maxCache 3.0 leverages the performance and latency capabilities of SSD technology for both read and write workloads. The read caching function is also improved with maxCache 3.0, with additional optimizations to the learned-path algorithm. maxCache 3.0 SSD caching software is the only caching solution that supports up to 2 TB of SSD cache.

Integrated Cache Protection

The Series 8 family continues Microsemi's battery-free portfolio. Series 8 adapters can be combined with the Microsemi Adaptec AFM-700 flash-based cache protection module (sold separately) to enable instant cache protection. New with Series 8, the 81605Z and 81605ZQ models have flash backup embedded on the board, eliminating the need for a daughterboard and further enabling Microsemi customers to do more with less.

Advanced Data Protection and Ease of Use

Microsemi's Adaptec RAID Code (ARC) delivers maximum reliability with an industry-leading feature set, including all of the RAID levels the industry has come to expect, plus unique features like flexible configuration modes for the adapter, hybrid RAID, and optimized disk utilization (ODU) where no available space is wasted. Microsemi's Adaptec maxView provides an HTML5 web interface that can be used in standard desktops and mobile browsers for all storage configuration and management needs.




Benefits

- Ideal for 12 Gbps performance-hungry server and workstation platforms, without compromising proven Microsemi reliability
- Provides high I/O transaction and high bandwidth processing, solutions that reduce energy consumption and maintenance costs

Highlights

- maxCache 3.0 caching software (Series 8Q only)
- Cache protection via third-generation ZMCP; AFM-700 (integrated on 81605Z and 81605ZQ, optional for rest of Series 8 products)
- Up to 16 native SAS/SATA ports in a LP/MD2 design
- 12 Gbps and 6 Gbps compatibility with HDD or SSD SAS/SATA devices
- 12 Gbps throughput per SAS port using mini-SAS HD connectors
- Microsemi's 12 Gbps RAID-on-Chip (ROC), x8 PCIe Gen3 interface with 12 Gbps SAS ports to enable a new generation of performance
- >700K IOPS; 6.6 Gbps sequential reads, 6.2 Gbps sequential writes

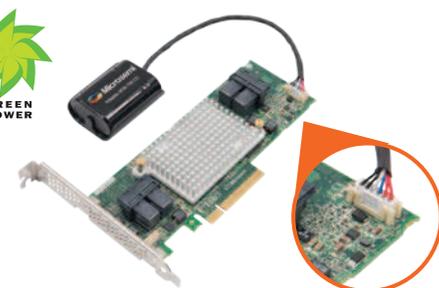

Microsemi Adaptec® Series 8 Family: 81605Z/Q, 8885/Q, 8805, 8405

12 Gbps PCIe Gen3 High-Port SAS/SATA RAID Adapters

| | | | |
|---------------------------------|---|--|---|
| Key software features | <ul style="list-style-type: none"> maxCache 3.0 caching software (Series 8Q only) Flexible configuration: HBA mode and auto volume mode for automatic deployment Optimized disk utilization (multiple arrays per disk) Supports up to 256 SAS or SATA devices using SAS expanders Support for native 4K sector SAS and SATA devices in addition to 512-byte sector devices Hybrid RAID 1 and 10 Quick initialization | <ul style="list-style-type: none"> Online capacity expansion Copyback hot spare Dynamic caching algorithm Native command queuing (NCQ) Background initialization Hot-plug drive support RAID level migration Hot spares—global, dedicated, and pooled Automatic/manual rebuild of hot spares SES and SAF-TE enclosure management Configurable stripe size S.M.A.R.T. support | <ul style="list-style-type: none"> Multiple arrays per disk drive Dynamic sector repair Staggered drive spin-up Bootable array support Support for tape devices, autoloaders MSI-X support for all device drivers for all supported operating systems Secure boot support for the uEFI host BIOS USB image available on storage.microsemi.com/en-us/support/start to boot maxView GUI from any USB device for enhanced GUI-based setup and offline maintenance |
| Management utilities | maxView Storage Manager <ul style="list-style-type: none"> Web-based GUI management utility OS support: Windows, Linux, Solaris, VMware Remote configuration, monitoring, and notification Remote firmware updates SMI-S support SMTP | ARCCONF <ul style="list-style-type: none"> Command-line interface SMI-S support for VMware BIOS Configuration Utility (CTRL+A) <ul style="list-style-type: none"> Legacy configuration utility Flashable BIOS support | uEFI BIOS Configuration Utility <ul style="list-style-type: none"> HII-based configuration utility Flashable BIOS support Event Monitor <ul style="list-style-type: none"> Lightweight event monitoring and logging tool Distributes adapter events and notifies user |
| Operating systems | Microsoft Windows, Red Hat Linux, SUSE Linux, Fedora, Debian Linux, Ubuntu Linux, Sun Solaris, FreeBSD, VMware ESXi. The latest drivers are available at storage.microsemi.com/en-us/support/start . | | |
| Dimensions | 2.535" H x 6.6" L (64 mm x 167 mm) | | |
| Operating temperature | 0 °C to 55 °C (with 200 LFM airflow, without flash); 0 °C to 50 °C (with 200 LFM airflow, with flash) Note: This adapter contains a powerful RAID processor that requires adequate airflow to operate reliably. Only install this card into server or PC chassis with at least 200 LFM airflow. Temperature measured 1 inch from RAID adapter. | | |
| Operating current | 0.1 A at 3.3 VDC, 1.2 A at 12.0 VDC (8405, 8805, 8885, 8885Q), 1.0 A at 3.3 VDC, 1.1 A at 12.0 VDC (81605ZQ, 81605Z) | | |
| Regulatory certification | CE, FCC, UL, C-tick, VCCI, KCC, CNS | | |
| Environmental compliance | RoHS | | |
| MTBF | 2 million hours at 40 °C | | |
| Warranty | 3 years | | |

| RAID adapter | 81605ZQ | 8885Q | 81605Z | 8885 | 8805 | 8405 |
|-------------------------|---------------------------------|------------------------------|---------------------------------|------------------------------|-----------------------|-----------------------|
| Order number | 2281600-R (single) | 2277100-R (single) | 2287101-R (single) | 2277000-R (single) | 2277500-R (single) | 2277600-R (single) |
| RAID levels | 0,1,1E,5,6,10, 50, 60 | 0,1,1E,5,6,10, 50, 60 | 0,1,1E,5,6,10, 50, 60 | 0,1,1E,5,6,10, 50, 60 | 0,1,1E,5,6,10, 50, 60 | 0,1,1E,5,6,10, 50, 60 |
| Ports | 16 internal | 8 internal/8 external | 16 internal | 8 internal/8 external | 8 internal | 4 internal |
| Connectors | 4 x SFF-8643 | 2 x SFF-8643 2 x SFF-8644 | 4 x SFF-8643 | 2 x SFF-8643 2 x SFF-8644 | 2 x SFF-8643 | 1 x SFF-8643 |
| Bus interface | 8-Lane PCIe Gen3 | 8-Lane PCIe Gen3 | 8-Lane PCIe Gen3 | 8-Lane PCIe Gen3 | 8-Lane PCIe Gen3 | 8-Lane PCIe Gen3 |
| Processor | 12 Gbps RoC | 12 Gbps RoC | 12 Gbps RoC | 12 Gbps RoC | 12 Gbps RoC | 12 Gbps RoC |
| Cache | 1024 MB | 1024 MB | 1024 MB | 1024 MB | 1024 MB | 1024 MB |
| Cache protection | AFM-700 flash backup (embedded) | AFM-700 (included) | AFM-700 flash backup (embedded) | AFM-700 (optional) | AFM-700 (optional) | AFM-700 (optional) |
| SSD cache | maxCache 3.0 | maxCache 3.0 | — | — | — | — |



Microsemi Corporate Headquarters
 One Enterprise, Aliso Viejo, CA 92656 USA
 Within the USA: +1 (800) 713-4113
 Outside the USA: +1 (949) 380-6100
 Fax: +1 (949) 215-4996
 Email: sales.support@microsemi.com
www.microsemi.com

Microsemi Corporation (Nasdaq: MSCC) offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Microsemi is headquartered in Aliso Viejo, California and has approximately 4,800 employees globally. Learn more at www.microsemi.com.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.