



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ISO MINI® Relays

RoHS

Relays

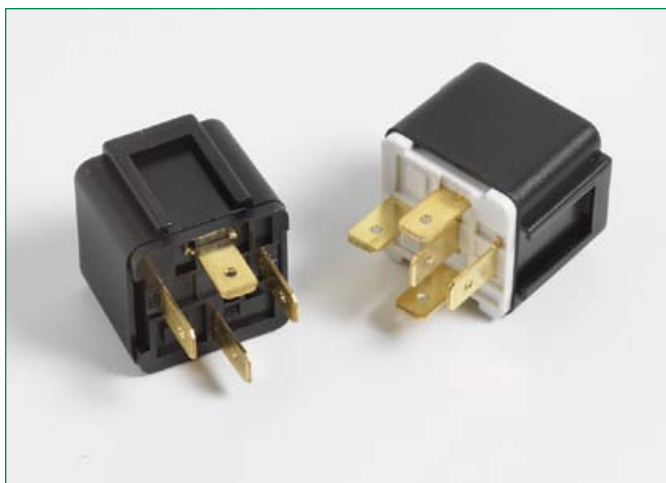

Specifications

Normally open relay:

Color Case: Black
Color Base: Black

Change over relay:

Color Case: Black
Color Base: White

Packaging:

Series Serien	Pack Size
020407xxTXN	10
020407xxZ	500




HOMOLOGATION IN ACCORDANCE WITH:

REGULATION N.10 ECE-ONU/02


EUROPEAN DIRECTIVE DIR.95/54 CE

Remote control switches for automotive applications available for 12V and 24V rated circuits.


Relais für Anwendungen im Automobilbereich, erhältlich für 12V und 24V Bordnetze.




Normally open (A)




Normally open with Resistor (B)




Normally open with Diode (C)



Change Over (A)



Change Over with resistor (B)



Change Over with Diode (C)

Normally open relay

Part Number Artikel-Nr.	Volt	Ampere	Feature Merkmal	Diagram Schema
02040701_	12V	30A	–	A
02040705_	12V	30A	Resistor	B
02040715_	12V	40A	Resistor	B
02040709_	12V	30A	Diode	C
02040702_	24V	20A	–	A
02040706_	24V	20A	Resistor	B
02040710_	24V	20A	Diode	C

Change over relay

Part Number Artikel-Nr.	Volt	Ampere	Feature Merkmal	Diagram Schema
02040703_	12V	20/30A	–	A
02040707_	12V	20/30A	Resistor	B
02040711_	12V	20/30A	Diode	C
02040716_	12V	30/40A	Diode	C
02040704_	24V	10/20A	–	A
02040708_	24V	10/20A	Resistor	B
02040712_	24V	10/20A	Diode	C