



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!







## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

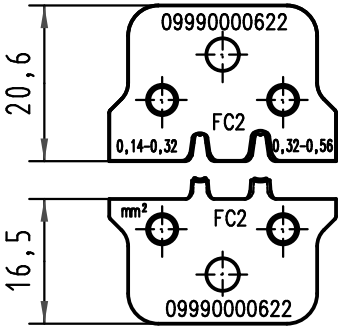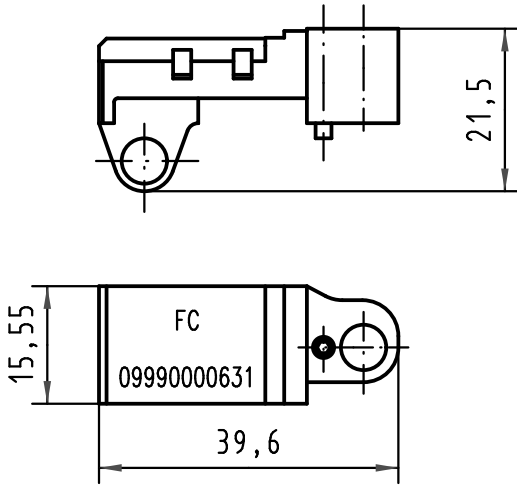

	1	2	3	4	5	6																																				
A	<p>Crimpeinsätze <i>Crimp dies</i></p> 			<p>Positionierer FC 09 99 000 0631 im Set enthalten <i>Locator FC 09 99 000 0631 scope of delivery</i></p> 																																						
B																																										
C	<p>Anwendungsbereich: FC2 Kontakte <i>Application range: FC2 contacts</i></p> <p>Leiterquerschnitt: Profil 1: 0,14-0,32 mm<sup>2</sup> <i>wire gauge : Profil 2: 0,32-0,56 mm<sup>2</sup></i></p>			<p>für Crimpkontakte: <i>for crimp contacts:</i></p> <table border="1"> <tr> <td>09 06 000 9571</td> <td>Messer / male</td> <td>2</td> <td>0,14-0,56</td> <td>26-20</td> <td>0,8-2,0</td> </tr> <tr> <td>09 06 000 9551</td> <td>Messer / male</td> <td>1</td> <td>0,14-0,56</td> <td>26-20</td> <td>0,8-2,0</td> </tr> <tr> <td>09 06 000 8481</td> <td>Feder / female</td> <td>2</td> <td>0,14-0,56</td> <td>26-20</td> <td>0,8-2,0</td> </tr> <tr> <td>09 06 000 8471</td> <td>Feder / female</td> <td>1</td> <td>0,14-0,56</td> <td>26-20</td> <td>0,8-2,0</td> </tr> <tr> <td>09 06 000 6461</td> <td>Feder / female</td> <td>Sn</td> <td>0,14-0,56</td> <td>26-20</td> <td>0,8-2,0</td> </tr> <tr> <td>Kontakt Nr. <i>contact no.</i></td> <td>Messer / Feder <i>male / female</i></td> <td>AFS <i>PL</i></td> <td>Leiterquerschnitt <i>wire gauge</i></td> <td>AWG <i>AWG</i></td> <td>Isolationsø <i>Insulationø</i></td> </tr> </table>			09 06 000 9571	Messer / male	2	0,14-0,56	26-20	0,8-2,0	09 06 000 9551	Messer / male	1	0,14-0,56	26-20	0,8-2,0	09 06 000 8481	Feder / female	2	0,14-0,56	26-20	0,8-2,0	09 06 000 8471	Feder / female	1	0,14-0,56	26-20	0,8-2,0	09 06 000 6461	Feder / female	Sn	0,14-0,56	26-20	0,8-2,0	Kontakt Nr. <i>contact no.</i>	Messer / Feder <i>male / female</i>	AFS <i>PL</i>	Leiterquerschnitt <i>wire gauge</i>	AWG <i>AWG</i>	Isolationsø <i>Insulationø</i>
09 06 000 9571	Messer / male	2	0,14-0,56	26-20	0,8-2,0																																					
09 06 000 9551	Messer / male	1	0,14-0,56	26-20	0,8-2,0																																					
09 06 000 8481	Feder / female	2	0,14-0,56	26-20	0,8-2,0																																					
09 06 000 8471	Feder / female	1	0,14-0,56	26-20	0,8-2,0																																					
09 06 000 6461	Feder / female	Sn	0,14-0,56	26-20	0,8-2,0																																					
Kontakt Nr. <i>contact no.</i>	Messer / Feder <i>male / female</i>	AFS <i>PL</i>	Leiterquerschnitt <i>wire gauge</i>	AWG <i>AWG</i>	Isolationsø <i>Insulationø</i>																																					
D	 <p>ALL Dimensions in mm Original Size DIN A 4</p>			<p>Techn. Character.</p> <table border="1"> <tr> <td></td> <td>Dat.</td> <td>Name</td> <td rowspan="4">Maßstab/Scale  1:1</td> </tr> <tr> <td></td> <td>Detail.</td> <td>15.10.02 Hage.</td> </tr> <tr> <td></td> <td>Insp.</td> <td>15.10.02 Wae.</td> </tr> <tr> <td></td> <td>Stand.</td> <td></td> </tr> </table>				Dat.	Name	Maßstab/Scale  1:1		Detail.	15.10.02 Hage.		Insp.	15.10.02 Wae.		Stand.																								
	Dat.	Name	Maßstab/Scale  1:1																																							
	Detail.	15.10.02 Hage.																																								
	Insp.	15.10.02 Wae.																																								
	Stand.																																									
<p>35198 17.06.08 Wae</p> <p>31239</p> <p>Mod. Dat. Name</p>			<p>HARTING Electronics GmbH &amp; Co. KG D-32339 ESPELKAMP</p> 																																							
			<p>Nicht tolerierte Maß/Free size tolerances</p> <p><b>Crimp-Set FC2</b> für Zange 09 99 000 0620.00 for tool 09 99 000 0620.00</p> <p><b>TB 09 99 000 0622</b></p> <p>Sub.</p>																																							
			<p>Blatt/ page</p>																																							