



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




# Linux, WiFi shield for Arduino


## Yun Shield

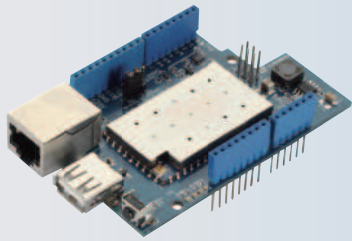

Yun Shield



Arduino

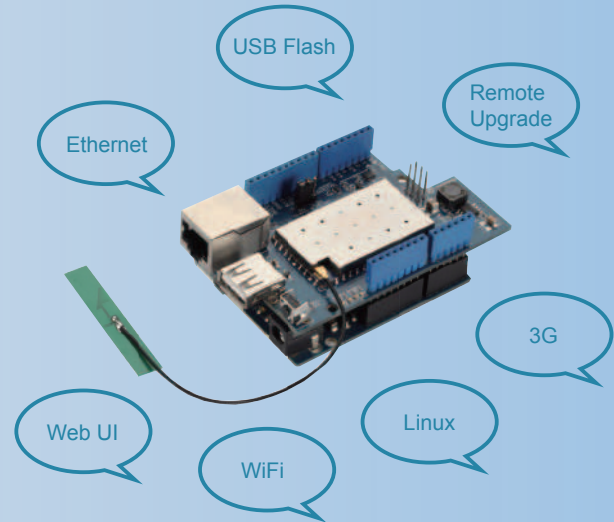

Yun Board

## OVERVIEW:

Yun Shield is one of the most powerful shields for Arduino Board. Yun Shield is designed to solve the Internet connectivity and storage issue for Arduino Boards.

Yun Shield runs Open Source OpenWrt system (Same system as running in Arduino Yun) and it is fully compatible with Arduino IDE v1.5.4 or later. With Yun Shield, user can friendly program/debug Arduino boards via WiFi and connect Arduino projects to Internet easily. Yun Shield is the ideally choice for Arduino Projects which require various internet connections and more storage.

Basically, Yun Shield + Leonardo equals to the official Arduino Yun, but Yun Shield is more flexible because it can work with other Arduino boards such as Uno, Duemilanove etc. And Yun Shield use external wifi antenna which provides stability and possibility for various installations.

## Features:

- Open source Linux (OpenWrt) inside
- Low power consumption
- Compatible with Arduino IDE 1.5.4 or later, user can program, debug or upload sketch to Arduino board via Arduino IDE.
- Managed by Web GUI, SSH via LAN or WiFi
- Software upgradable via network
- Built-in web server
- Support internet connection via LAN port, WiFi or 3G dongle
- Support USB flash to provide storage for Arduino projects
- Failsafe design provides robustly system
- Compatible with Arduino Leonardo, Uno, Duemilanove, Diecimila, Mega

## Specification:

- Processor: 400MHz, 24K MIPS
- Flash: 16MBytes
- RAM: 64MBytes
- Power Input: 7v ~ 15v via Arduino VIN pin
- 1 x 10M/100M RJ45 connector
- 150M WiFi 802.11 b/g/n
- Digital I/O pins x 15
- External Antenna via I-Pex connector
- 1 x USB 2.0 host connector
- 1 x Reset button
- Compatible with 3.3v or 5v I/O Arduino