



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Step Down Auto Transformers - Chassis Mount


Available with Receptacle and Line Cord or Leads



Signal's auto transformers provide the user the capability of adapting voltages for worldwide applications.

General Specifications

- Power - 100 VA to 2000 VA
- Voltage - EB version: 230V to 115V, 50/60Hz
OF version: 230V to 115V or 115V to 230V, 50/60Hz
- Connections - EB version: Line cord and receptacle NEMA 5-15 style
OF version: 8" leads
- Insulation System - Class B, 130° C
- Higher insulation class available

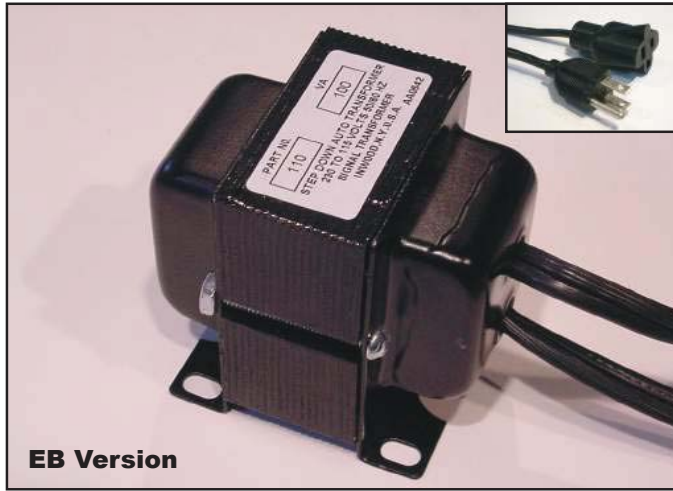

Part Number	VA	Dimensions			Mounting Centers	Weight
		Width	Depth	Height		
		Inches (mm)				
110	100	1.87 (47.6)	2.37 (60.3)	2.50 (63.5)	1.50 x 1.68 (38.1 x 42.8)	1.5 (0.68)
112	120	2.87 (73.0)	2.12 (54.0)	3.50 (88.9)	2.25 x 1.75 (57.2 x 44.5)	3.0 (1.36)
115	150	2.87 (73.0)	3.37 (85.7)	3.50 (88.9)	2.25 x 2.00 (57.2 x 50.8)	3.5 (1.59)
120	200	2.87 (73.0)	3.50 (88.9)	3.50 (88.9)	2.25 x 2.12 (57.2 x 54.0)	4.0 (1.81)
125	250	2.87 (73.0)	3.87 (98.4)	3.50 (88.9)	2.25 x 2.50 (57.2 x 63.5)	4.8 (2.18)
130	300	3.25 (82.6)	3.87 (98.4)	3.87 (98.4)	2.50 x 2.43 (63.5 x 61.9)	5.5 (2.49)
150	500	3.25 (82.6)	4.87 (123.8)	3.87 (98.4)	2.50 x 3.43 (63.5 x 87.3)	8 (3.63)
175	750	3.25 (82.6)	5.87 (149.2)	3.87 (98.4)	2.50 x 4.43 (63.5 x 112.7)	11 (5.00)
1100	1000	4.50 (114.3)	5.12 (130.2)	5.50 (139.7)	3.50 x 3.50 (88.9 x 88.9)	14 (6.35)
1150	1500	4.50 (114.3)	6.12 (155.6)	5.50 (139.7)	3.50 x 4.50 (88.9 x 114.3)	20 (9.07)
1200	2000	4.50 (114.3)	7.12 (181.0)	5.50 (139.7)	3.50 x 5.50 (88.9 x 139.7)	26 (11.79)

Part Number	VA	Dimensions			Mounting Centers	Weight
		Width	Depth	Height		
		Inches (mm)				
110-OF	100	2.25 (57.2)	2.00 (50.8)	1.93 (49.2)	2.81 (71.4)	1.3 (0.59)
112-OF	120	3.37 (85.7)	2.50 (63.5)	2.87 (73.0)	2.81 x 1.87 (71.4 x 47.6)	2.5 (1.13)
115-OF	150	3.37 (85.7)	2.75 (69.9)	2.87 (73.0)	2.81 x 2.12 (71.4 x 54.0)	3.0 (1.36)
120-OF	200	3.37 (85.7)	2.87 (73.0)	2.87 (73.0)	2.81 x 2.25 (71.4 x 57.2)	3.5 (1.59)
125-OF	250	3.37 (85.7)	3.25 (82.6)	2.87 (73.0)	2.81 x 2.62 (71.4 x 66.7)	4.2 (1.90)
130-OF	300	3.75 (95.3)	3.25 (82.6)	3.12 (79.4)	3.12 x 2.50 (79.4 x 63.5)	5.0 (2.27)
150-OF	500	3.75 (95.3)	4.25 (107.9)	3.12 (79.4)	3.12 x 3.50 (79.4 x 88.9)	8.0 (3.63)
175-OF	750	3.75 (95.3)	5.25 (133.4)	3.12 (79.4)	3.12 x 4.50 (79.4 x 114.3)	11 (5.00)
1100-OF	1000	5.25 (133.4)	4.50 (114.3)	4.37 (111.1)	4.37 x 3.12 (111.1 x 79.4)	14 (6.35)
1150-OF	1500	5.25 (133.4)	5.50 (139.7)	4.37 (111.1)	4.37 x 4.12 (111.1 x 104.8)	19 (8.62)
1200-OF	2000	5.25 (133.4)	6.50 (165.1)	4.37 (111.1)	4.37 x 5.12 (111.1 x 130.2)	25 (11.34)

Custom versions available upon request.

©2015 Signal Transformer Inc. Specifications subject to change without notice. 07.15



www.signaltransformer.com

500 Bayview Avenue, Inwood, NY 11096
Toll Free 866-239-5777 • Tel 516-239-5777 • Fax 516-239-7208
sales@signaltransformer.com • techhelp@signaltransformer.com