



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





Features

- Screw-down connection
- Improved connection for better efficiency
- 2 x 16 mm² wire connection
- Adapted to Bourns® Model 1210 and 1250 Series Surge Protective Devices (SPDs)

Applications

- Electrical service entrance
- Branch panels

Model 1200TA Terminal Adapter


Characteristics

The Bourns® Model 1200TA Terminal Adapter is designed to improve the wiring efficiency of Model 1210 and 1250 Series SPDs. This add-on adapter allows for efficient and safe parallel connections. This method of connection is highly recommended and minimizes voltage drops in parallel connections.


Characteristics

Torque.....	2-2.5 Nm (18-22 lb-in)
Min.-Max. Cross Section	2.5-16 mm ² (13-5 AWG)
Insulation Material	Polycarbonate UL-94V0
Metal Material.....	Brass
Mounting.....	Model 1210 & 1250 SPDs

Product Dimensions

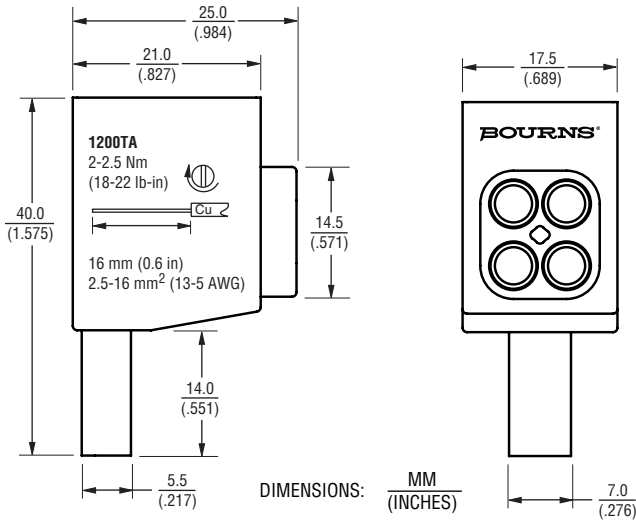

Electrical Diagram (1-pole)

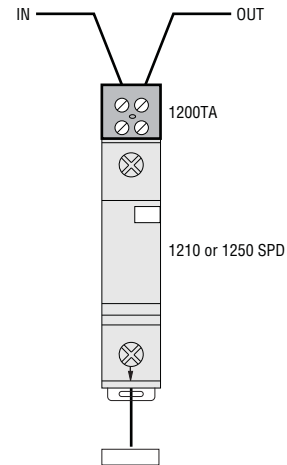

Installation



How to Order

Bourns Part Number..... 1200TA

Packaging Specifications

Standard Packaging 8 pieces per package

BOURNS®

Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116
Europe: Tel: +41-41 768 5555 • Fax: +41-41 768 5510
The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700
www.bourns.com

REV. 05/13

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.