

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










## **Low Profile Audio 141 Series**


**PC Board Mount** 





## **Features**

- Pin type (0.25" length & 0.035" diameter), P.C. board mount
- Low profile, open type construction
- Frequency response 200 Hz. 15 Khz. (+/- 2 db, ref. @ 1 Khz.)
- Net weight 0.6 oz.

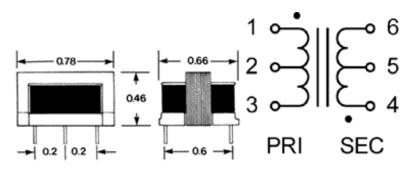

	Nominal Impedance (Ohms)		Max. Pri.	D.C. Resistance		
			D.C. current	(Ohms)		Output
Part No.	Primary	Secondary	(ma.)	Primary	Secondary	(Milliwatts)
141B	200 K	1000	0	3775	85	4
141D	3000 ct	1000 ct	1	120	51	150
141F	25 K	50	2	1645	65	100
141H	600 ct	600 ct	2	32	45	150
141M	30 K	1200 ct	2	1100	47	100
141P	1200 ct	8	2	50	0.45	150

Note: Part number 141M is incorrectly listed as having a 300K primary impedance in our latest catalogs, the primary is actually 30K as shown above.

Data subject to change without notice