



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# High Frequency Ceramic Solutions

Wideband Ceramic Balun, 1:1 Impedance Ratio, EIA 0805

P/N 1720BL15B0050

Detail Specification: 1/22/2016

Page 1 of 4

General Specifications	
Part Number	1720BL15B0050
Frequency (MHz)	625 ~ 2815
Unbalanced Impedance	50 $\Omega$
Balanced Impedance	50 $\Omega$
Insertion Loss	1.5 dB max.
Return Loss	9.5 dB min.
Phase Difference	180 $\pm$ 10 deg.
Amplitude Difference	1.0 dB max.
CMRR	20 dB min.
Power Capacity	2W max. (CW)
Reel Quantity	4,000 pcs
Operating Temperature	-40 to +85°C



Storage Temperature	-40 to +85°C
Storage Period	18 months max.
Recommended Storage Conditions of unused product on T&R	+5 to +35°C, 18 mos. max. Humidity 45~75% RH

You can download measured s-parameters of this component at: <http://www.johansontechnology.com/baluns>

Part Number Explanation				
P/N Suffix	Packing Style	Bulk	Suffix = S	Eg. 1720BL15B0050S
		T & R	Suffix = E	Eg. 1720BL15B0050E
	Termination style	100% Tin	Suffix = None	Eg. 1720BL15B0050 (E or S)
	Evaluation Board	1720BL15B0050-EB1SMA (3 female SMA connectors)		

Mechanical Dimensions		
	In	mm
L	0.079 $\pm$ 0.004	2.00 $\pm$ 0.10
W	0.049 $\pm$ 0.004	1.25 $\pm$ 0.10
T	0.037 $\pm$ 0.004	0.95 $\pm$ 0.10
a	0.012 $\pm$ 0.004	0.30 $\pm$ 0.10
b	0.008 $\pm$ 0.004	0.20 $\pm$ 0.10
c	0.012 +0.004/0.008	0.30 +0.1/-0.2
g	0.014 $\pm$ 0.004	0.35 $\pm$ 0.10
p	0.026 $\pm$ 0.002	0.65 $\pm$ 0.05

Terminal Configuration	
1	Unbalanced Port (IN)
2	GND or DC feed + RF GND
3	Balanced Port (OUT1)
4	Balanced Port (OUT2)
5	GND
6	NC

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 1.0

2016 Johanson Technology, Inc. All Rights Reserved

# High Frequency Ceramic Solutions

Wideband Ceramic Balun, 1:1 Impedance Ratio, EIA 0805

P/N 1720BL15B0050


Detail Specification: 1/22/2016

Page 2 of 4

## Mounting Considerations

Mount these devices with colored mark facing up.


\* Line width should be designed to provide 50ohm impedance matching characteristics.

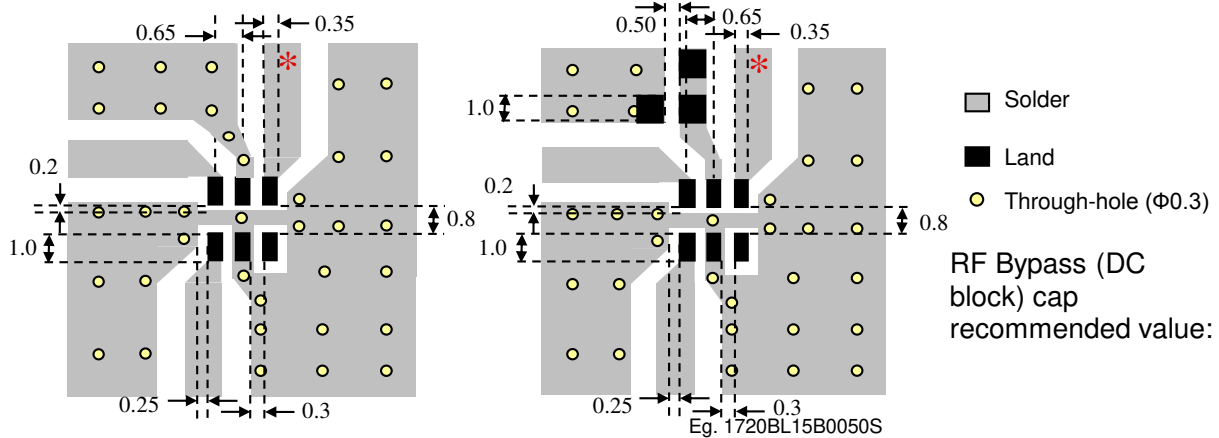

Need our help laying this out for you? Need the layout file?

Send us a message at: [www.johansontechnology.com/ask-a-question](http://www.johansontechnology.com/ask-a-question)

## Measuring Diagram

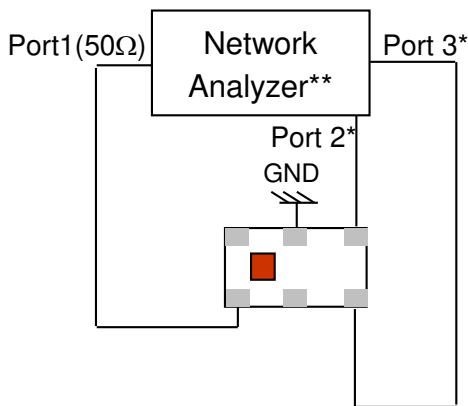

Port 1: Unbalanced Port  
Ports 2 and 3: Balanced Port

$IL = S_{ds21}$

$RL = S_{ss11}$

$Amp\_balance = dB(S(2,1)/S(3,1))$

$Phase\_balance = Phase(S(2,1)/S(3,1))$

\*Impedance for ports 2 and 3 = Balanced Impedance/2

\*\*E5071B from Agilent

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 1.0

2016 Johanson Technology, Inc. All Rights Reserved



# High Frequency Ceramic Solutions

Wideband Ceramic Balun, 1:1 Impedance Ratio, EIA 0805


P/N 1720BL15B0050

Detail Specification: 1/22/2016


Page 3 of 4

## Typical Electrical Characteristics (T=25°C)

### Insertion and Return Loss

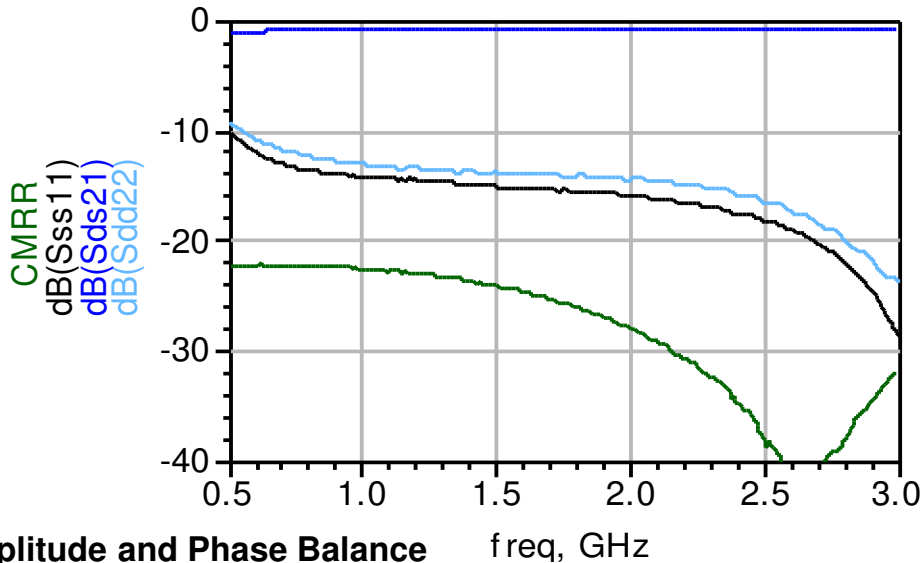

### Amplitude and Phase Balance

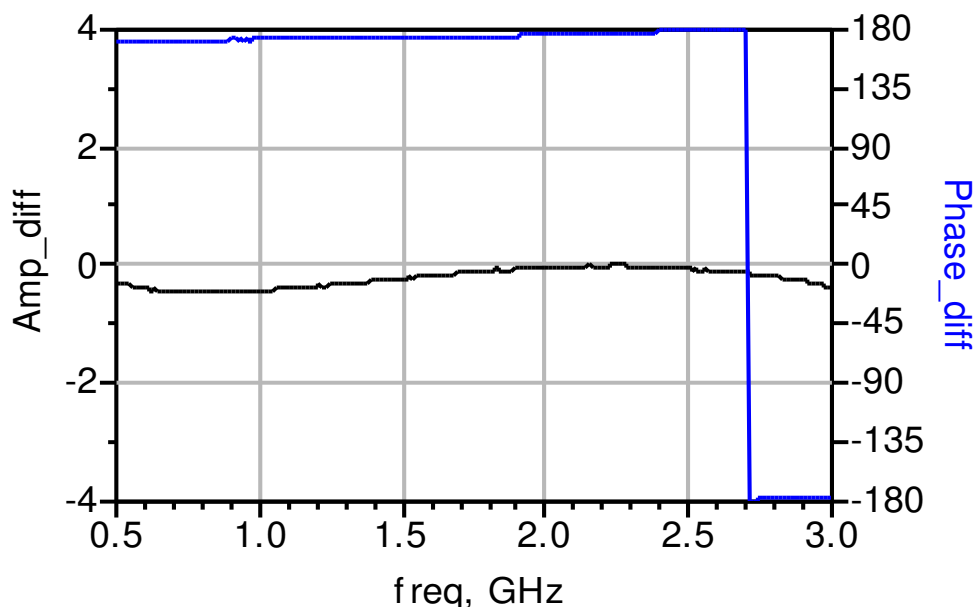

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 1.0

2016 Johanson Technology, Inc. All Rights Reserved

# High Frequency Ceramic Solutions

**Wideband Ceramic Balun, 1:1 Impedance Ratio, EIA 0805**

**P/N 1720BL15B0050**

Detail Specification: 1/22/2016

Page 4 of 4

## More Filter-Balun info at:

<http://www.johansontechnology.com/baluns>

## Packaging information

[www.johansontechnology.com/tape-reel-packaging](http://www.johansontechnology.com/tape-reel-packaging)

## Soldering Information

[www.johansontechnology.com/typical-soldering-profile](http://www.johansontechnology.com/typical-soldering-profile)

## MSL Info

[www.johansontechnology.com/msl-rating](http://www.johansontechnology.com/msl-rating)

## Recommended Storage Condition and Max Shelf Life

[www.johansontechnology.com/recommended-storage-conditions](http://www.johansontechnology.com/recommended-storage-conditions)

## RoHS Compliance

[www.johansontechnology.com/rohs-compliance](http://www.johansontechnology.com/rohs-compliance)

## Layout review services

[www.johansontechnology.com/ask-a-question](http://www.johansontechnology.com/ask-a-question)

## Antenna layout review, tuning, and characterization services

[www.johansontechnology.com/ipc-antenna-services](http://www.johansontechnology.com/ipc-antenna-services)

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.



[www.johansontechnology.com](http://www.johansontechnology.com)

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 1.0

2016 Johanson Technology, Inc. All Rights Reserved