



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





NeoPixel Stick – 8 x 5050 RGBW LEDs – Warm White – ~3000K

PRODUCT ID: 2867

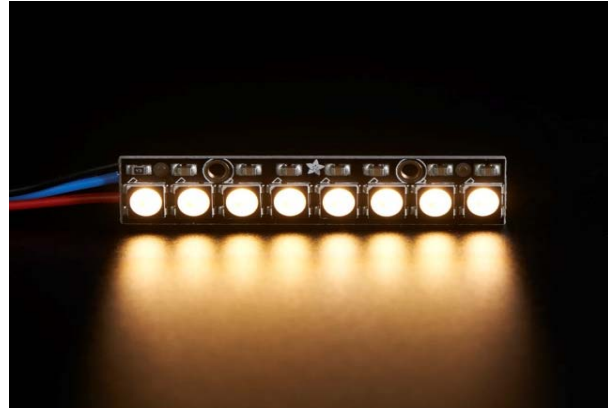

Description

What is better than smart RGB LEDs? Smart RGB+White LEDs! These NeoPixel sticks now have 4 LEDs in them (red, green, blue *and* white) for excellent lighting effects. These are fun and glowy, and you can control each LED individually! Make your own little LED arrangement with this stick of NeoPixel LEDs.

This is the Warm White RGBW version. We also have this stick in [Natural White](#), [Cool White](#), and [good ole RGB!](#)

The NeoPixel is 'split', one half is the RGB you know and love, the other half is a white LED with a yellow phosphor. Unlit, it resembles an egg yolk. Lit up these are insanely bright (like ow my eye hurts) and can be controlled with 8-bit PWM per channel (8 x 4 channels = 32-bit color overall). Great for adding lots of colorful + white dots to your project!

We crammed 8 of the tiny 5050 (5mm x 5mm) smart RGBW LEDs onto a PCB with mounting holes and a chainable design. Use only one microcontroller pin to control as many as you can chain together! Each LED is addressable as the driver chip is inside the LED. Each one has ~18mA constant current drive so the color will be very consistent even if the voltage varies, and no external choke resistors are required making the design slim. Power the whole thing with 5VDC (4-7V works) and you're ready to rock.

NeoPixel LEDs use 800 KHz protocol so specific timing is required. On NeoPixels, the PWM rate is ~400 Hz, which works well but is noticeable if the LED is moving. In comparison, DotStars have a 20 KHz PWM rate, so even when moving the LED around, you won't see the pixelation, the blending is very smooth. (we recommend DotStars if you can use them)

The LEDs are 'chainable' by connecting the output of one stick into the input of another. There is a single data line with a very timing-specific protocol. Since the protocol is very sensitive to timing, it requires a real-time microcontroller such as an AVR, Arduino, PIC, mbed, etc. It cannot be used with a Linux-based microcomputer or interpreted microcontroller such as the netduino or Basic Stamp. Our wonderfully-written Neopixel library for Arduino supports these pixels! As it requires hand-tuned assembly it is only for AVR cores but others may have ported this chip driver code so please google around. An 8MHz or faster processor is required.

We have a tutorial showing wiring, power usage calculations, example code for usage, etc. for NeoPixel. Please check it out! Please note you will need a NeoPixel library with RGBW support which is not always available. If you try to control these with a plain 'RGB' NeoPixel library, you'll get very weird results. Our Adafruit NeoPixel library does support RGBW but if you're using something else, just be aware that it might require some hacking.

Comes as a single stick with 8 individually addressable RGBW LEDs assembled and tested.

Our detailed NeoPixel Uberguide has everything you need to use NeoPixels in any shape and size. Including ready-to-go library & example code for the Arduino UNO/Duemilanove/Diecimila, Flora/Micro/Leonardo, Trinket/Gemma, Arduino Due & Arduino Mega/ADK (all versions)

Technical Details

Dimensions: 10.2mm x 51.1mm x 3.2mm / 0.4" x 2.0" x 0.13"

Weight: 2.6g