



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Foot Candle/Lux Meter

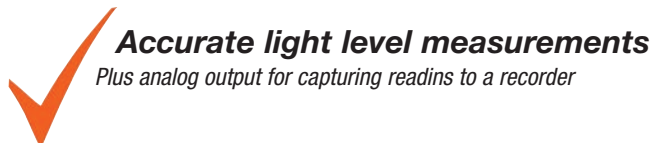

Accurate light level measurements

Plus analog output for capturing readings to a recorder

Features:

- Accurately displays light level in terms of Fc or Lux over three ranges:
Fc (0-200, 0-2000 and 0-5000Fc) and
Lux (0-2000, 0-20000, 0-50000Lux)
- Resolution of 0.1Fc or 1Lux with 5% accuracy
- Select fast (0.2 second) or slow (0.4 seconds) response
- Monitor light levels using outputs; 1mV per count analog output for capturing readings to a recorder
- Utilizes precision photo diode and color correction filter; Cosine/color corrected
- Dimensions: 6.4 x 2.8 x 1.2" (163 x 70 x 30mm);
Weight: 7.8oz (220g)
- Complete with 9V battery and light sensor with 45" (1.1m) cable and protective cover



Ordering Information:

- 401025.....Foot Candle/Lux Meter
- 401025-NIST401025 with NIST Certificate
- 409996.....Vinyl Pouch Carrying Case

