



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PART NUMBER
430169-xxx

NOTES:
1. BREAK ALL SHARP EDGES APPROX. .010
 LEAVE ALL SHARP EDGES
2. MARK IN AREA INDICATED BY X _____
 PART NUMBER
 REVISION LEVEL

Stamp Assembly
p/n on
this surface

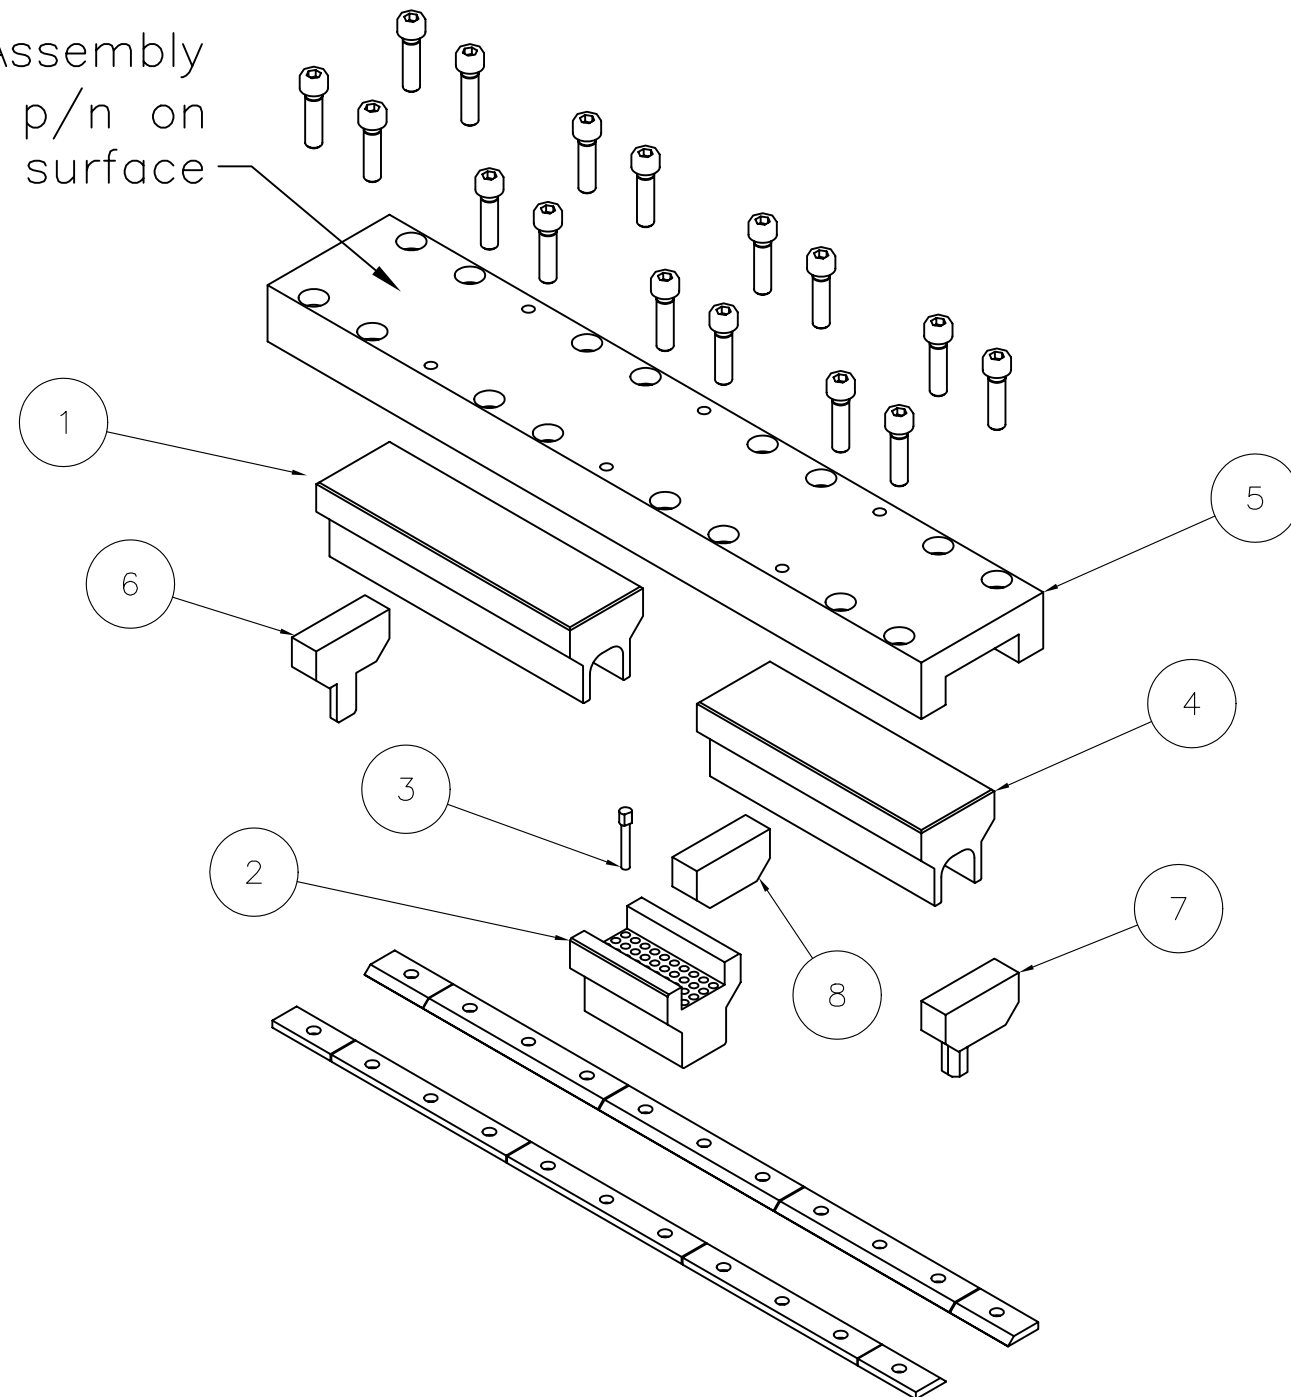

Item 1. Base p/n 430173-xxx. xxx = "Dim A" "Dim A" = (number of power contacts minus 1 contact) x .200 or .250 or .300 (see product print) + .290.
NOTE: if only 1 contact "Dim A" = .290.

Item 2. Base p/n 155324-xxx XXX = "L" dim on dwg 155324

2A. "L" = "number of signal contacts" x .100
(number of signal contacts = "CCC" on product print)

Item 3. Base p/n 155325-xxx XXX is determined by length of mating side contact pins. -002 = .220 mate length, 007 = .270 mate length.

Item 4. Base p/n 430173-xxx. xxx = "Dim A" "Dim A" = (number of power contacts minus 1 contact) x .200 or .250 or .300 (see product print) + .290.
NOTE: if only 1 contact "Dim A" = .290.

Item 5. Base p/n 160257-xxx XXX = overall length of connector. Cut to length from 160257-001, -002, -003, or -004. Overall length = "Dim A" on product print.


Item 6. Base p/n 430199-001 "Left Orientation Key".

Item 7. Base p/n 430199-002 "Right Orientation Key".

Item 8. Base p/n 160256-003 Not used in all connectors, consult product print.

A	ECR#V10359	GJP	10-01
	New Dwg	GJP	10-01
REV	DESCRIPTION	BY	DATE
REVISIONS			

ENGLISH

TOLERANCE UNLESS OTHERWISE SPECIFIED		THIRD ANGLE PROJECTION		 www.fciconnect.com	
SURFACE FINISH *** / ALL OVER		MATERIAL *** HARDNESS ***			
TOLERANCE INCH		ALT. MAT'L. *** HARDNESS ***		TITLE PwrBlade Vertical Header Insertion Tool	
LINEAR	.00±.01	FINISH ***		SCALE 3/4	SIZE B
	.000±.005	DR G Pontius	DATE 10-18-01	DWG. NO. 430169	SHEET 1 of 1
	.0000±.0005	ENGR G Pontius	10-18-01		
USED ON	.00000±.0002	CHK G Pontius	10-18-01		
	0° ±1'	APPD G Pontius	10-18-01		

NOTE: THIS DOCUMENT IS THE PROPERTY OF AND EMBODIES PROPRIETARY INFORMATION OF FCI ELECTRONICS. NO PART OF THE INFORMATION SHOWN ON THIS DOCUMENT MAY BE USED IN ANY WAY WITHOUT THE WRITTEN CONSENT OF FCI ELECTRONICS.

FORM E-3074 REV 3/00