imall

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Circuit Breaker for Equipment thermal, Snap-in rear side, 1 pole







Description

- Snap-in type from rear side (0.5...3.0mm)
- Thermal circuit breaker
- 1-pole
- On request available with elevaled glow-wire ratings Quick connect terminals 6.3×0.8 mm

Unique Selling Proposition

- Reset type
- Cycling trip-free release
- Compact design
- Different mounting possibilities

Standards

- IEC 60934

- UL 1077
- CSA C22.2 No. 235
- GB 17701

Technical Data

Applic	ations

- Designed for standard and medical applications
- Power supplies
- Uninterruptible power supply
- Power tools
- Industrial appliances
- HVAC
- Household appliances

Weblinks

pdf datasheet, html-datasheet, General Product Information, Approvals, CE declaration of conformity, RoHS, CHINA-RoHS, REACH, Distributor-Stock-Check, Detailed request for product, Product News

Rated Voltage AC	240 V, 50 / 60 Hz	Ambient temperature
Rated Voltage DC	48 / 32 V, see approvals	
Rated current	3-16 A, see approbations	
Conditional short circuit ca- pacity	IEC: Inc, PC1, AC 240 V: 2 kA	Weight
	UL / CSA: SC, AC 240 V DC 48 / 32 V:	
	2 kA, C1	
Degree of protection front side	IP 40	
Endurance minimum	IEC: 200% Ir, cos φ 0.6: min. 50 swit-	
	ching cycles	
Endurance typical	3-8 A: 150% lr, cos φ 0.9:	
	2500 switching cycles	
	10-16 A: 150% lr, cos φ 0.9:	
	6000 switching cycles	
Dielectric Strength	1500 VAC	
Insulation resistance	500 VDC > 1000 MΩ	

 Ambient temperature
 3 A: -5 °C to 60 °C


 4 A: -5 °C to 50 °C

 5-16 A: -5 °C to 60 °C

 Weight
 9 - 13 g

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in General Product Information

Dimension T9-711






Pannel thickness s =0.5 - 3.0 mm

Approval		Rated current	Rated voltage AC	Rated voltage DC
c 🕰 us	UL 1077	3 - 12 A 14 - 16 A	240 V 240 V	48 V 32 V
c 🕰 us	CSA 22.2 235	3 - 12 A 14 - 16 A	240 V 240 V	48 V 32 V
	IEC 60934	3 - 12 A 14 - 16 A	240 V 240 V	48 V 32 V
((())) ())	GB 17701	3 - 12 A 14 - 16 A	240 V 240 V	48 V 32 V

Typical internal resistance

Rated Current [A]	Internal Resistance [m Ω]
3	65.0
4	21.6
5	23.6
6	16.3
7	15.3
8	12.9
10	7.3
12	7.0
14	4.8
15	4.3
16	3.9

Time-Current-Curves

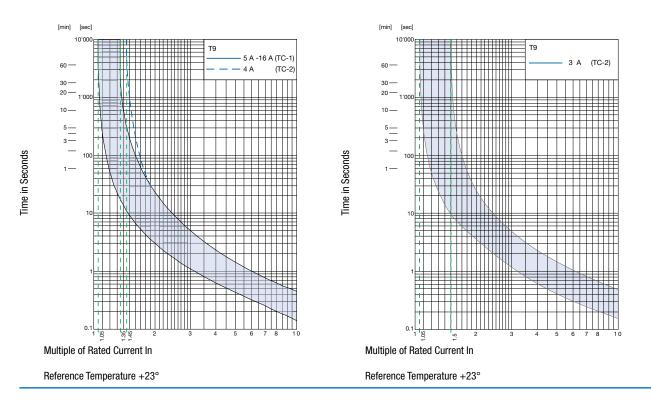

Effect of ambient temperature

The units are calibrated for an ambient temperature of $+23^{\circ}$ C. To determine the rated current for a lower or higher ambient temperature, use a correction factor (typical value) from the table below:

Ambient temperature [°C]	Correction factor
-5	0,85
+10	0,95
+23	1,00
+40	1,08
+60	1,21

Example: Rated current = 10 A; Environmental temperature = $60 \degree C$; --> Correction factor = 1.21; Resulting current = 12.1 A --> Fount to next higher rated current: 13 A

Accessory

Part Number	Туре	Resources / Description	
4404.0039	TZZ31	Protection cover for IP 65	
4400.0420	TZZ11	Knurled nut nickel-plated	
4400.0559	TZZ11-414	Knurled nut black	
4400.0425	TZZ12	Additional hexagonal nut nickel-plated	
4404.0072	TZZ51	Additional hexagonal nut PA 66	

Variants

Mounting	Front printing	Rated current	Order Number
Snap-in mounting from rear side	Rated current not printed on front	3.0 A	4404.0057
Snap-in mounting from rear side	Rated current not printed on front	4.0 A	4404.0029
Snap-in mounting from rear side	Rated current not printed on front	5.0 A	4404.0035
Snap-in mounting from rear side	Rated current not printed on front	6.0	4404.0030
Snap-in mounting from rear side	Rated current not printed on front	7.0 A	4404.0037

Mounting	Front printing	Rated current	Order Number
Snap-in mounting from rear side	Rated current not printed on front	8.0 A	4404.0031
Snap-in mounting from rear side	Rated current not printed on front	10.0 A	4404.0032
Snap-in mounting from rear side	Rated current not printed on front	12.0 A	4404.0033
Snap-in mounting from rear side	Rated current not printed on front	14.0 A	4404.0036
Snap-in mounting from rear side	Rated current not printed on front	15.0 A	4404.0038
Snap-in mounting from rear side	Rated current not printed on front	16.0 A	4404.0034

Most Popular.

Availability for all products can be searched real-time:http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging Unit 100 Pcs