

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







## Circuit Breaker for Equipment thermal with Metal Actuator



#### See below:

# **Approvals and Compliances**

#### **Description**

- Thermal circuit breaker
- Metal switch non-illuminated and illuminated
- 1-pole
- Quick connect terminals 6.3 x 0.8 mm or screw terminals

#### **Applications**

- Power supplies
- Uninterruptible power supply
- Power tools
- Household appliances

#### References

Component 1: circuit breakers Component 2: metal switch; Component 3: Coupler

#### Weblinks

pdf datasheet, html-datasheet, General Product Information, Distributor-Stock-Check, Detailed request for product, Product News

Technical	Data
-----------	------

Rated Voltage AC	240 V; 50/60 Hz
Rated Voltage DC	28 V
Rated current range AC	0.05 - 15/16 A
Conditional short circuit ca-	IEC: Inc, PC1, AC 240 V: 1 kA
pacity	
Dielectric Strength	50 Hz: > 1.5 kV
	Impulse 1.2/50 µs: > 2.5 kV
Insulation Resistance	$500\text{VDC} > 100\text{M}\Omega$
Endurance typical	2 x lr: 5000 switching cycles
	Reset type
	AC: 2 x lr, cos φ 0.6:
	DC: $2 \times Ir$ , $L/R = 2 - 3 \text{ ms}$ :
	50 switching cycles
	Manual ON/OFF type
	AC: 2 x lr, cos φ 0.6:
	DC: $2 \times Ir$ , $L/R = 2 - 3 \text{ ms}$ :
	5000 switching cycles

Overload	IEC: min. 40 trips @ 6 x Ir, cos <b>φ</b> 0.6
	UL / CSA: min. 50 trips @ 1.5 x Ir, cos φ 0.75
Ambient temperature	-5°C to 60°C
Vibration Resistance	± 0.75 mm @ 5 - 60 Hz acc. to IEC 60068-2-6, test Fc 7 G @ 60 - 500 Hz acc. to IEC 60068-2-6, test Fc
Shock Resistance	60 G / 18ms acc. to IEC 60068-2-27, test Ea
Tripping Type	Thermal
Actuation Type	Manual ON/OFF
Shock Protection	IK 07
Tightening Torque Stainless Steel Nut	12 Nm for thread M19, 16 Nm for M22
Salt Spray Test (acc. to DIN 50021-SS)	24 h / 48 h / 96 h Residence Time
Supply Voltage	24 VDC Ring Illumination without series resistor Point Illumination
Weight	ca. 45 g

## **Approvals and Compliances**

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

# **Product standards**

Product standards that are referenced

Organization	Design	Standard	Description
<u>IEC</u>	Designed according to	IEC 60934	Circuit-breakers for equipment (CBE)
(UL)	Designed according to	UL 1077	Standard for Supplementary Protectors for Use in Electrical Equipment
<b>®</b>	Designed according to	GB 17701	Circuit-breaker for equipment

# **Application standards**

Application standards where the product can be used

Organization	Design	Standard	Description
<u>IEC</u>	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technology equipment. $ \label{eq:continuous} $


# Compliances

The product complies with following Guide Lines

Identification	Details	Initiator	Description
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.
RoHS	RoHS	SCHURTER AG	EU Directive RoHS 2011/65/EU
<b>30</b>	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.


# Dimension [mm]

T12 MSM 19

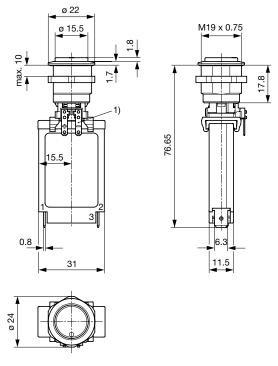


1) only among MSM PI / RI quick connect terminal 2.8x0.5 mm

# T12 MSM 22

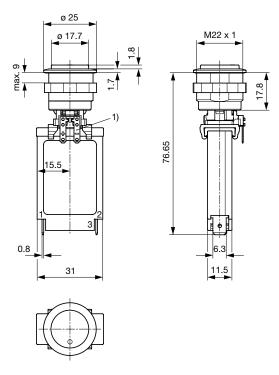

1) only among MSM PI / RI quick connect terminal 2.8x0.5 mm

## T12 MSM 22 screw version

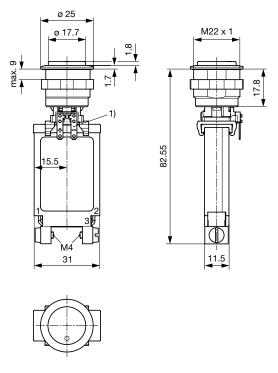


1) only among MSM PI / RI quick connect terminal 2.8x0.5 mm


MSM 19 LA ST / MSM 19 LA RI


MSM 19 LA LE / MSM 19 LA PI / MSM 19 LA RI optional


MSM 22 LA ST / MSM 22 LA RI

MSM 22 LA LE / MSM 22 LA PI / MSM 22 LA RI optional









Drilling diagram

Drilling diagram

Drilling diagram

Drilling diagram

## **Point Illumination**

Operating Data	Forward Current max.	Forward Voltage at 10 mA	Forward Voltage at 8 mA	Forward Voltage max.				
LED red	30 mA	1,9 VDC		3,0 VDC				
LED green	30 mA	2,1 VDC		3,0 VDC				
LED blue	20 mA		3,7 VDC	4,5 VDC				
Attention: Switches are delivered without series resistor.								

## Recommendation of series resistors for point illumination

LED- Color	I <sub>D</sub> [mA]	I <sub>DMax</sub> [mA]	<b>U</b> <sub>V</sub>	R <sub>V</sub> [Ω]	R <sub>V</sub> <sup>E24</sup> [Ω]	P <sub>V</sub> [w]**		ν)	R <sub>V</sub> [Ω]	R <sub>V</sub> <sup>E24</sup> [Ω]	P <sub>V</sub> [w]**		U <sub>V</sub> [V] .	R <sub>V</sub> [Ω]	R <sub>V</sub> <sup>E24</sup> [Ω]	P <sub>V</sub> [w]
			5				1	12				ļ	24			
rod	10			310	330	0,03		[	1010	1000	0,10			2210	2200	0,22
red		30		67	68	0,06		[	300	300	0,27			700	750	0,63
	10			290	300	0,03		[	990	1000	0,10			2190	2200	0,22
green		30		67	68	0,06			300	300	0,27			700	750	0,63
blue	8			163	160	0,01		[	1038	1100	0,07		[	2538	2700	0,16
blue		20		25	27	0,01			375	390	0,15			975	1000	0,39

I<sub>D</sub> LED-Forward Current [8mA/10mA]

I<sub>DMax</sub> LED-Forward Current max. [20mA/30mA]

R<sub>V</sub> Series Resistor (calculated)

R<sub>V</sub> E24 Series Resistor (regarding E24-Resistor series)
P<sub>V</sub> Power dissipation concerning R<sub>V</sub> (calculated)

## Typical internal resistance

Rated Current [A]	Internal Resistance [Ω]
0.05	225.000
0.50	3.300
1.00	0.880
2.00	0.267
3.00	0.128
4.00	0.073
5.00	0.040
6.00	0.031
7.00	0.018
8.00	0.018
9.00	0.010
10.00	0.0087
11.00	0.0087
12.00	0.0087
13.00	0.0087
14.00	0.0070
15.00	0.0070
16.00	0.0055

#### Effect of ambient temperature

The units are calibrated for an ambient temperature of +23°C. To determine the rated current for a lower or higher ambient temperature, use a correction factor (typical value) from the table below:

Ambient temperature [°C]	Correction factor
-5	0.87
0	0.90
10	0.95
23	1.00
30	1.05
40	1.12
50	1.20
60	1.30


Example: Rated current = 5 A; Environmental temperature = 50 °C; --> Correction factor = 1.2; Resulting current = 6.0 A

# Lettering

	•						
	The last three digits in the order number define the lettering:						
	000	No Lettering					
001-074 Standard Lettering							
	101- Customized Lettering						

Lettering options see on Datasheet MSM LA 22

#### **Time-Current-Curves**

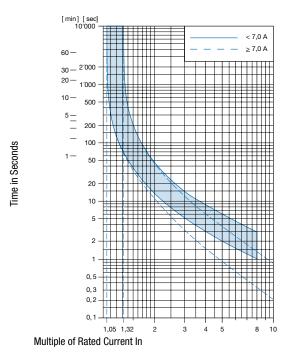

Reference Temperature +23°

## **All Variants**

Circuit Breakers			Momentary Action		Order Number
			Switch		
Туре	Rated cur-	connection type	Туре	Illumination	
T12-221-10	10A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 19	non-illuminated	4410.9001
T12-221-16	16A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 19	non-illuminated	4410.9002
T12-221-10	10A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 22	non-illuminated	4410.9003
T12-221-16	16A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 22	non-illuminated	4410.9004
T12-221-10	10A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 19	Point Illumination, blue	4410.9005
T12-221-16	16A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 19	Point Illumination, blue	4410.9006
T12-221-10	10A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 22	Point Illumination, blue	4410.9007
T12-221-16	16A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 22	Point Illumination, blue	4410.9008
T12-221-10	10A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 19	Ring Illumination, blue, 24 VDC	4410.9009
T12-221-16	16A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 19	Ring Illumination, blue, 24 VDC	4410.9010
T12-221-10	10A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 22	Ring Illumination, blue, 24 VDC	4410.9011
T12-221-16	16A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 22	Ring Illumination, blue, 24 VDC	4410.9012
T12-222-10	10A	Bolts and nuts	MSM LA 22	non-illuminated	4410.9017
T12-222-16	16A	Bolts and nuts	MSM LA 22	non-illuminated	4410.9018
T12-221-15	15A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 22	non-illuminated	4410.9019
T12-221-15	15A	Quick connect terminals 6.3 x 0.8 mm	MSM LA 22	Ring Illumination, blue, 24 VDC	4410.9021

Coupler is included

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER



**Packaging Unit** 10 Pcs



- Actuating elements in ESD safe packagingScrew nuts and sealing rings in a bag (enclosed in the box)Circuit breaker in a bag (enclosed in the box)

CLUSTER\_6 CLL