

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Circuit Breaker for Equipment thermal, Rocker actuation, 1 pole



See below:

Approvals and Compliances

Description

- Thermal circuit breaker
- 1-pole
- Snap-in version
- Positively trip-free release
- Different rocker colours
- High configurability
- Wide current range

Applications

- Power tools
- Industrial appliances
- Equipment for construction
- Cleaning equipment
- Commercial and household kitchen appliances

pdf datasheet, html-datasheet, General Product Information, Distributor-Stock-Check, Detailed request for product, Product News

_			_	
100	٠hn	100	I Da	t n

Rated Voltage AC	240 V; 50/60 Hz	
Rated Voltage DC	32 V	
Rated current range AC	0.05 - 20 A	
Conditional short circuit ca-	0.0520 A: 2 kA, SC (C1) @ 240 VAC	
pacity		
Degree of Protection	from front side IP 40 acc. to IEC 60529	
Dielectric Strength	50 Hz: > 2.5 kV	
	Impulse 1.2/50 µs: > 4 kV	
Insulation Resistance	$500\text{VDC} > 100\text{M}\Omega$	
Lifetime	mechanical: 50'000 switching cycles	
	AC: 1 x lr, cos φ 0.6:	
	30'000 switching cycles	
	DC: 1 x lr, $L/R = 2 - 3$ ms:	
	50'000 switching cycles	

Overload	IEC: min. 40 trips
	@ 6 x lr, cos φ 0.6
	UL / CSA: min. 50 trips
	@ 1.5 x lr, cos φ 0.75
Ambient temperature	-30°C to 60°C
Vibration Resistance	± 0.75 mm @ 10 - 60 Hz
	acc. to IEC 60068-2-6, test Tc
	10 G @ 60 - 500 Hz
	acc. to IEC 60068-2-6, test Tc
Shock Resistance	30 G / 18ms
	acc. to IEC 60068-2-27, test Ea
Tripping Type	Thermal
Actuation Type	Rocker
Weight	16.5 - 18.5a

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products. Approval Reference Type: TA35

Approval Logo	Certificates	Certification Body	Description
© ^V E	VDE Approvals	VDE	VDE Certificate Number: 40019754
c FU °us	UL Approvals	UL	UL File Number: E71572
(I)	CQC Approvals	CQC	CCC Certificate Number: 2013010307598660

Product standards

Product standards that are referenced

Organization	Design	Standard	Description
<u>IEC</u>	Designed according to	IEC 60934	Circuit-breakers for equipment (CBE)
(UL)	Designed according to	UL 1077	Standard for Supplementary Protectors for Use in Electrical Equipment
CSA Group	Designed according to	CSA C22.2 No. 235	Supplementary Protectors
(%)	Designed according to	GB 17701	Circuit-breaker for equipment

Application standards

Application standards where the product can be used


Organization	Design	Standard	Description
<u>IEC</u>	Designed for applications acc.	IEC/UL 60950	IEC 60950-1 includes the basic requirements for the safety of information technology equipment. $\label{eq:continuous}$

Compliances

The product complies with following Guide Lines


Identification	Details	Initiator	Description	
C€	CE declaration of conformity	SCHURTER AG	The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008.	
ROHS	RoHS	SCHURTER AG	EU Directive RoHS 2011/65/EU	
5 0	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.	
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.	

Dimension [mm]

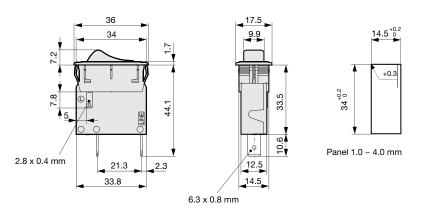


Diagrams

1-pole, 1 bimetal, illuminated



1) Line, 2) Load Codepos AAA = C2F, C4F, C7F, C8F, C9F

1-pole, 1 bimetal, non illuminated



1) Line, 2) Load Codepos AAA = CFT, CGT

The keys / codepos are listed in the key table of the basic function for selection.

Approval		Rated current	Rated voltage AC	Rated voltage DC
c FL °us	UL 1077	0.0520 A	240 V	32 V
c Al us	CSA C22.2 235	0.0520 A	240 V	32 V
DVE	IEC 60934	0.0520 A	240 V	32 V
(3)	GB 17701	0.0520 A	240 V	32 V

Typical internal resistance

	Typical internal resistance			
Rated Current [A]	Internal Resistance [Ω]			
0.05	200.000			
0.1	70.000			
0.5	2.750			
1.0	0.720			
1.5	0.340			
2.0	0.187			
2.5	0.115			
2.8	0.089			
3.0	0.059			
4.0	0.059			
5.0	0.044			
6.0	0.028			
7.0	0.0142			
8.0	0.0142			
10.0	0.0109			
12.0	0.0086			
13.0	0.0072			
14.0	0.0072			
15.0	0.0056			
16.0	0.0056			
18.0	0.0052			
20.0	0.0052			


Effect of ambient temperature


The units are calibrated for an ambient temperature of +23°C. To determine the rated current for a lower or higher ambient temperature, use a correction factor (typical value) from the table below:

Ambient temperature [°C]	Correction factor
-30	0.77
-20	0.81
0	0.90
+23	1.00
+40	1.03
+50	1.04
+60	1.06

Example: Rated current = 5 A; Environmental temperature = 50 °C; --> Correction factor = 1.04; Resulting current = $5.2 \text{ A} \longrightarrow \text{Fount to next higher rated current: } 6 \text{ A}$

Time-Current-Curves

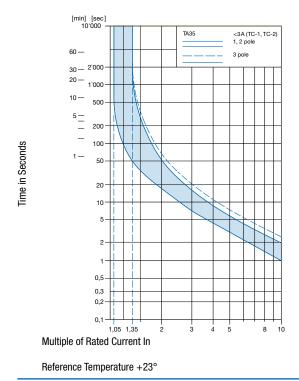

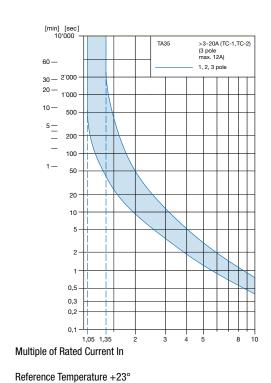


TA35 - CBD B F 120 C0 - CZMXX = Legend

Config. Code

TA35 - CBD B F 120 C0 - CZMXX

The characters are placeholders for the correspondingly keys of selections from the key tables.

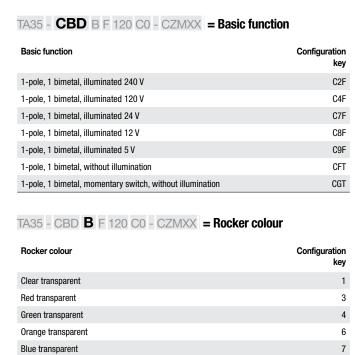

Legend		Configuration key
embossed	- 0	F
white printed	NO PHO	н
black printed	OPP	К
white printed	- 0	L
black printed	- 0	М
TA35 - CBD B F 120 C0 - CZMXX = F	Rated current	

Rated current	Configuration key
without thermal overload protection / temporarily without VDE approval	C00
0.05 A	Z05
0.1 A	J01
0.2 A	J02
0.3 A	J03
0.4 A	J04

Other rated currents on request

В

G

R

W X

Υ

Black

Green

Red

White

Orange Yellow

Rated current	Configuration key
0.5 A	J05
0.8 A	J08
1.0 A	J10
1.2 A	J12
1.5 A	J15
2.0 A	J20
2.5 A	J25
3.0 A	030
3.5 A	035
4.0 A	040
5.0 A	050
6.0 A	060
7.0 A	070
8.0 A	080
10.0 A	100
12.0 A	120
13.0 A	130
14.0 A	140

Rated current	Configuration key
15.0 A	150
16.0 A	160
18.0 A	180
20.0 A	200
TA35 - CBD B F 120 CO - CZMXX = Reserve	
Reserve	-
Reserve reserve	key
	Configuration key CO CO Configuration key

http://www.schurter.com/pdf/english/typ_TA35_Accessories.pdf

All Variants

Basic function	Rocker colour	Legend	Rated current	Accessories	Config. Code	Order Number
1-pole, 1 bimetal, without illumination	White	black printed	2.0 A	Without cover	TA35-CFTWKJ20C0	4435.0029
1-pole, 1 bimetal, without illumination	White	embossed	3.0 A	Without cover	TA35-CFTWF030C0	4435.0019
1-pole, 1 bimetal, without illumination	White	black printed	3.0 A	Without cover	TA35-CFTWM030C0	4435.0082
1-pole, 1 bimetal, illuminated 120 V	Red transparent	white printed	3.0 A	Without cover	TA35-C4F3H030C0	4435.0431
1-pole, 1 bimetal, without illumination	Red	black printed	3.0 A	Without cover	TA35-CFTRM030C0	4435.0481
1-pole, 1 bimetal, without illumination	Black	embossed	4.0 A	Without cover	TA35-CFTBF040C0	4435.0028
1-pole, 1 bimetal, without illumination	Black	embossed	5.0 A	Without cover	TA35-CFTBF050C0	4435.0173
1-pole, 1 bimetal, without illumination	Black	white printed	5.0 A	Without cover	TA35-CFTBH050C0	4435.0204
1-pole, 1 bimetal, without illumination	Black	white printed	6.0 A	Without cover	TA35-CFTBH060C0	4435.0205
1-pole, 1 bimetal, without illumination	Red	embossed	10.0 A	Without cover	TA35-CFTRF100C0	4435.0056
1-pole, 1 bimetal, without illumination	Black	embossed	10.0 A	Without cover	TA35-CFTBF100C0	4435.0174
1-pole, 1 bimetal, momentary switch, without illumination	Black	embossed	10.0 A	Without cover	TA35-CGTBF100C0	4435.0471
1-pole, 1 bimetal, without illumination	White	embossed	13.0 A	Without cover	TA35-CFTWF130C0	4435.0049
1-pole, 1 bimetal, without illumination	White	embossed	15.0 A	Without cover	TA35-CFTWF150C0	4435.0037
1-pole, 1 bimetal, without illumination	Black	embossed	15.0 A	Without cover	TA35-CFTBF150C0	4435.0137
1-pole, 1 bimetal, without illumination	Black	white printed	16.0 A	Without cover	TA35-CFTBH160C0	4435.0209
1-pole, 1 bimetal, without illumination	Black	embossed	16.0 A	Without cover	TA35-CFTBF160C0	4435.0300
1-pole, 1 bimetal, without illumination	Black	white printed	20.0 A	Without cover	TA35-CFTBL200C0	4435.0256

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging Unit 20 Pcs

Accessories

Description



TA35 Accessories Screw-on collar with cover, IP65