

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








Honeywell

700 Series Platinum RTDs

Temperature Sensors



DESCRIPTION

The 700 Series Platinum RTD (Resistance Temperature Detector) is an economical, miniature temperature sensor. The series is available in two different package configurations, leaded and SMT (Surface Mount Technology). Two sizes are available for each configuration, with the SMT available in industry standard 0805 and 1206 packages.

The 700 Series has 100 Ω and 1000 Ω base resistances and is available in both the 3750 ppm/K and 3850 ppm/K temperature coefficients (375 and 385 alphas). The tolerances of the 700 Series meet DIN class A, DIN class B and DIN class 2B industry-standards.

The 700 Series is RoHS (Restriction of Hazardous Substances) compliant (EU Directive 2002/95/EC).

FEATURES

- Linear resistance vs temperature
- High accuracy
- Interchangeable
- Excellent stability
- · Fast time response
- Wide temperature range
- · RoHS compliant

POTENTIAL APPLICATIONS

- HVAC (Heating Ventilation and Air Conditioning)
- Electronic assemblies
- Process control
- Appliances
- AutomotiveInstrumentation

700 Series Platinum RTDs


Table 1. Specifications

	700-*	701-*		
Temperature	Class B and 2B: -70 °C to 500 °C (continuous	Class B and 2B: -70 °C to 500 °C (continuous		
range	operation)	operation)		
	Class A: -30 °C to 300 °C	Class A: -30 °C to 300 °C		
Leads	Pt-clad Ni wire	Pt-clad Ni wire		
Long-term	max. R ₀ drift 0.04% after 1000 h at 500 °C	max. R ₀ drift 0.04% after 1000 h at 500 °C		
stability				
Vibration	at least 40 g acceleration at 10 Hz to 2000 Hz,	at least 40 g acceleration at 10 Hz to 2000 Hz,		
resistance	depends on installation	depends on installation		
Shock	at least 100 g acceleration with 8 ms half sine	at least 100 g acceleration with 8 ms half sine		
resistance	wave, depends on installation	wave, depends on installation		
Environmental	unhoused for dry environments only unhoused for dry environments only			
conditions				
Insulation	>100 MΩ at 20 °C; >2 MΩ at 500 °C	>100 M Ω at 20 °C; >2 M Ω at 500 °C		
resistance				
Self heating	0.4 K/mW at 0 °C	0.6 K/mW at 0 °C		
Response time	water current (v=0.4 m/s): t _{0.5} =0.05 s; t _{0.9} =0.15 s	water current (v=0.4 m/s): t _{0.5} =0.04 s; t _{0.9} =0.12 s		
	air stream (V=2 m/s): $t_{0.5}$ =3.0 s; $t_{0.9}$ =10.0 s	air stream (V=2 m/s): t _{0.5} =2.2 s; t _{0.9} =7.0 s		
Measuring current	100 Ω: 0.3 mA to 1.0 mA	100 Ω: 0.3 mA to 1.0 mA		
	1000 Ω: 0.1 mA to 0.3 mA	1000 Ω: 0.1 mA to 0.3 mA		
Packaging	anti-static plastic bag	anti-static plastic bag		

	702-*	703-*		
Temperature	Class B: -50 °C to 130 °C (continuous operation)	Class B: -50 °C to 130 °C (continuous operation)		
range				
Soldering	end-termination galvanic tin-plated with Ni barrier	end-termination galvanic tin-plated with Ni barrier		
connection	layer	layer		
Long-term	max. R₀ drift 0.06 % after 1000 h at 130 °C	max. R₀ drift 0.06 % after 1000 h at 130 °C		
stability				
Environmental	unhoused for dry environments only	unhoused for dry environments only		
conditions				
Insulation	>100 MΩ at 20 °C; >2 MΩ at 130 °C (glass	>100 M Ω at 20 °C; >2 M Ω at 130 °C (glass		
resistance	covering)	covering)		
Self heating	0.8 K/mW at 0 °C	0.4 K/mW at 0 °C		
Response time	water current (v=0.4 m/s): $t_{0.5}$ =0.10 s; $t_{0.9}$ =0.25 s	water current (v=0.4 m/s): $t_{0.5}$ =0.15 s; $t_{0.9}$ =0.30 s		
•	air stream (V = 2 m/s): $t_{0.5}$ =2.5 s; $t_{0.9}$ =8.0 s	air stream (V = 2 m/s): $t_{0.5}$ =3.5 s; $t_{0.9}$ =10.0 s		
Measuring current	100 Ω: 0.3 mA to 1.0 mA	100 Ω: 0.3 mA to 1.0 mA		
	1000 Ω: 0.1 mA to 0.3 mA	1000 Ω: 0.1 mA to 0.3 mA		
Processing	face up mounting: reflow soldering or wave	ve face up mounting: reflow soldering or wave		
instructions	soldering, e.g. double wave ≤8 s/235 °C	soldering, e.g. double wave ≤8 s/235 °C		
Packaging	face-up in blister reel	face-up in blister reel		



Temperature Sensors

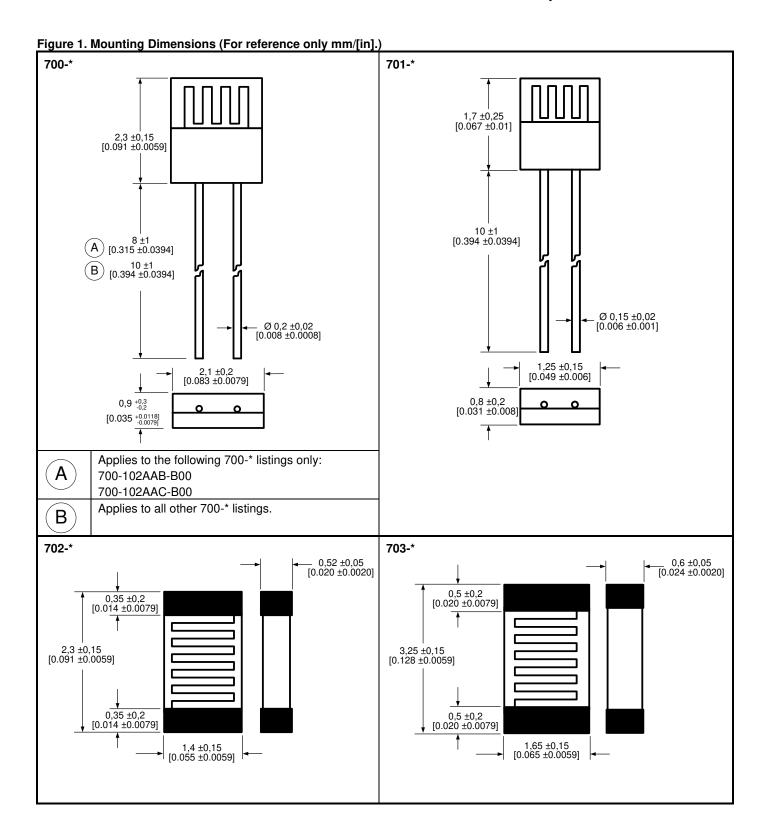

Order Guide

Catalog Listing	Package Style and Size mm [in]	Nominal Resistance at 0 °C	Temp. Coefficient	Temp. Range (°C)	Tolerance	Termination
700-101BAA-B00	chip, 2,1 w x 2,3 l x 0,9 thk [0.083 w x 0.091 l x 0.035 thk]	100 Ω	3850 ppm/K		DIN EN 60751, class A (R ₀ : ±0.06 %)	bare Pt-clad Ni wire, adjacent leads
700-101BAB-B00	chip, 2,1 w x 2,3 l x 0,9 thk [0.083 w x 0.091 l x 0.035 thk]	100 Ω	3850 ppm/K	-70 to 500	DIN EN 60751, class B (R ₀ : ±0.12 %)	bare Pt-clad Ni wire, adjacent leads
700-102AAB-B00	chip, 2,1 w x 2,3 l x 0,9 thk [0.083 w x 0.091 l x 0.035 thk]	1000 Ω	3750 ppm/K	-70 to 500	DIN EN 60751, class B (R ₀ : ±0.12 %)	bare Pt-clad Ni wire, adjacent leads
700-102AAC-B00	chip, 2,1 w x 2,3 l x 0,9 thk [0.083 w x 0.091 l x 0.035 thk]	1000 Ω	3750 ppm/K	-70 to 500	DIN EN 60751, class 2B (R ₀ : ±0.24 %)	bare Pt-clad Ni wire, adjacent leads
700-102BAA-B00	chip, 2,1 w x 2,3 l x 0,9 thk [0.083 w x 0.091 l x 0.035 thk]	1000 Ω	3850 ppm/K	-70 to 500	DIN EN 60751, class A (R ₀ : ±0.06 %)	bare Pt-clad Ni wire, adjacent leads
700-102BAB-B00	chip, 2,1 w x 2,3 l x 0,9 thk [0.083 w x 0.091 l x 0.035 thk]	1000 Ω	3850 ppm/K	-70 to 500	DIN EN 60751, class B (R ₀ : ±0.12 %)	bare Pt-clad Ni wire, adjacent leads
701-101BAA-B00	chip, 1,25 w x 1,7 l x 0,8 thk [0.049 w x 0.067 l x 0.031 thk]	100 Ω	3850 ppm/K	-70 to 500	DIN EN 60751, class A (R ₀ : ±0.06 %)	bare Pt-clad Ni wire, adjacent leads
701-101BAB-B00	chip, 1,25 w x 1,7 l x 0,8 thk [0.049 w x 0.067 l x 0.031 thk]	100 Ω	3850 ppm/K	-70 to 500	DIN EN 60751, class B (R ₀ : ±0.12 %)	bare Pt-clad Ni wire, adjacent leads
701-102AAB-B00	chip, 1,25 w x 1,7 l x 0,8 thk [0.049 w x 0.067 l x 0.031 thk]	1000 Ω	3750 ppm/K	-70 to 500	DIN EN 60751, class B (R ₀ : ±0.12 %)	bare Pt-clad Ni wire, adjacent leads
701-102BAB-B00	chip, 1,25 w x 1,7 l x 0,8 thk [0.049 w x 0.067 l x 0.031 thk]	1000 Ω	3850 ppm/K	-70 to 500	DIN EN 60751, class B (R ₀ : ±0.12 %)	bare Pt-clad Ni wire, adjacent leads
702-101BBB-A00	SMD 0805, 1,4 w x 2,3 l x 0,52 thk [0.055 w x 0.091 l x 0.020]	100 Ω	3850 ppm/K	-50 to 130	DIN EN 60751, class B (R ₀ : ±0.12 %)	end termination, galvanic Sn- plated with Ni barrier layer
702-102BBB-A00	SMD 0805, 1,4 w x 2,3 l x 0,52 thk [0.055 w x 0.091 l x 0.020]	1000 Ω	3850 ppm/K	-50 to 130	DIN EN 60751, class B (R ₀ : ±0.12 %)	end termination, galvanic Sn- plated with Ni barrier layer
703-101BBB-A00	SMD 1206, 1,65 w x 3,25 l x 0,6 thk [0.065 w x 0.128 l x 0.024]	100 Ω	3850 ppm/K	-50 to 130	DIN EN 60751, class B (R ₀ : ±0.12 %)	end termination, galvanic Sn- plated with Ni barrier layer
703-102BBB-A00	SMD 1206, 1,65 w x 3,25 l x 0,6 thk [0.065 w x 0.128 l x 0.024]	1000 Ω	3850 ppm/K	-50 to 130	DIN EN 60751, class B (R ₀ : ±0.12 %)	end termination, galvanic Sn- plated with Ni barrier layer



A WARNING

PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

A WARNING

MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

SALES AND SERVICE

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

E-mail: info.sc@honeywell.com

Internet: www.honeywell.com/sensing

Phone and Fax:

Asia Pacific +65 6355-2828 +65 6445-3033 Fax

Europe +44 (0) 1698 481481 +44 (0) 1698 481676 Fax

+1-305-805-8188 Latin America

+1-305-883-8257 Fax

USA/Canada +1-800-537-6945

+1-815-235-6847 +1-815-235-6545 Fax

Sensing and Control Honeywell 1985 Douglas Drive North Minneapolis, MN 55422

www.honeywell.com/sensing

