

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









April 1992 Revised May 2005

### 74ABT16244

## 16-Bit Buffer/Line Driver with 3-STATE Outputs

#### **General Description**

The ABT16244 contains sixteen non-inverting buffers with 3-STATE outputs designed to be employed as a memory and address driver, clock driver, or bus oriented transmitter/receiver. The device is nibble controlled. Individual 3-STATE control inputs can be shorted together for 8-bit or 16-bit operation.

#### **Features**


- Separate control logic for each nibble
- 16-bit version of the ABT244
- Outputs sink capability of 64 mA, source capability of 32 mA
- Guaranteed output skew
- Guaranteed multiple output switching specifications
- Output switching specified for both 50 pF and 250 pF loads
- Guaranteed simultaneous switching noise level and dynamic threshold performance
- Guaranteed latchup protection
- High impedance glitch free bus loading during entire power up and power down cycle
- Non-destructive hot insertion capability

#### **Ordering Code:**

Order Number	Package Number	Package Description
74ABT16244CSSC	MS48A	48-Lead Small Shrink Outline Package (SSOP), JEDEC MO-118, 0.300" Wide
74ABT16244CMTD	MTD48	48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide

Devices are also available in Tape and Reel. Specify by appending the suffix letter "X" to the ordering code.

#### **Logic Symbol**



#### **Connection Diagram**



#### **Pin Descriptions**

Pin Names	Description				
$\overline{OE}_n$	Output Enable Inputs (Active LOW)				
I <sub>0</sub> -I <sub>15</sub>	Inputs				
O <sub>0</sub> -O <sub>15</sub>	Outputs				

## **Truth Tables**

Ir	puts	Outputs
OE <sub>1</sub>	I <sub>0</sub> –I <sub>3</sub>	O <sub>0</sub> -O <sub>3</sub>
L	L	L
L	Н	Н
Н	X	Z

In	puts	Outputs
OE <sub>2</sub>	I <sub>4</sub> –I <sub>7</sub>	O <sub>4</sub> -O <sub>7</sub>
L	L	L
L	Н	Н
Н	X	Z

li	Outputs	
ŌE <sub>3</sub>	I <sub>8</sub> –I <sub>11</sub>	O <sub>8</sub> -O <sub>11</sub>
L	L	L
L	Н	Н
Н	X	Z


In	Outputs	
ŌE <sub>4</sub>	I <sub>12</sub> –I <sub>15</sub>	O <sub>12</sub> -O <sub>15</sub>
L	L	L
L	Н	Н
Н	X	Z

H = HIGH Voltage Level
L = LOW Voltage Level
X = Immaterial
Z = High Impedance

## **Functional Description**

The ABT16244 contains sixteen non-inverting buffers with 3-STATE outputs. The device is nibble (4 bits) controlled with each nibble functioning identically, but independent of the other. The control pins can be shorted together to obtain full 16-bit operation.

#### **Logic Diagram**



#### **Absolute Maximum Ratings**(Note 1)

 $\begin{array}{ll} \mbox{Storage Temperature} & -65\mbox{°C to } +150\mbox{°C} \\ \mbox{Ambient Temperature under Bias} & -55\mbox{°C to } +125\mbox{°C} \\ \end{array}$ 

Junction Temperature under Bias -55°C to +150°C

V<sub>CC</sub> Pin Potential to Ground Pin -0.5V to +7.0V

Input Voltage (Note 2) \$-0.5\$V\$ to +7.0\$V\$ Input Current (Note 2) <math display="inline">\$-30 mA to +5.0 mA

Voltage Applied to Any Output

in the Disabled or

Power-Off State -0.5V to 5.5V in the HIGH State -0.5V to  $V_{CC}$ 

Current Applied to Output

in LOW State (Max) twice the rated  $I_{OL}$  (mA) DC Latchup Source Current -500 mA

Over Voltage Latchup (I/O) 10V

# **Recommended Operating Conditions**

Free Air Ambient Temperature -40°C to +85°C Supply Voltage +4.5V to +5.5V

Minimum Input Edge Rate  $(\Delta V/\Delta t)$ 

Data Input 50 mV/ns
Enable Input 20 mV/ns

Note 1: Absolute maximum ratings are values beyond which the device may be damaged or have its useful life impaired. Functional operation

under these conditions is not implied.

Note 2: Either voltage limit or current limit is sufficient to protect inputs.

#### **DC Electrical Characteristics**

Symbol	Par	ameter	Min	Тур	Max	Units	V <sub>cc</sub>	Conditions
V <sub>IH</sub>	Input HIGH Voltage		2.0			V		Recognized HIGH Signal
V <sub>IL</sub>	Input LOW Voltage				0.8	V		Recognized LOW Signal
V <sub>CD</sub>	Input Clamp Diode Vo	Itage			-1.2	V	Min	I <sub>IN</sub> = -18 mA
V <sub>OH</sub>	Output HIGH Voltage		2.5			V	Min	$I_{OH} = -3 \text{ mA}$
			2.0			V	Min	$I_{OH} = -32 \text{ mA}$
V <sub>OL</sub>	Output LOW Voltage				0.55	V	Min	I <sub>OL</sub> = 64 mA
I <sub>IH</sub>	Input HIGH Current				1	μА	Max	V <sub>IN</sub> = 2.7V (Note 3)
I <sub>BVI</sub>	Input HIGH Current							V <sub>IN</sub> = V <sub>CC</sub>
	Breakdown Test				7	μА	Max	$V_{IN} = 7.0V$
I <sub>IL</sub>	Input LOW Current				-1 -1	μА	Max	V <sub>IN</sub> = 0.5V (Note 3) V <sub>IN</sub> = 0.0V
V <sub>ID</sub>	Input Leakage Test		4.75		•	V	0.0	I <sub>ID</sub> = 1.9 μA
10	mpar zoanago roor					,	0.0	All Other Pins Grounded
I <sub>OZH</sub>	Output Leakage Curre	ent			10	μΑ	0 – 5.5V	$V_{OUT} = 2.7V; \overline{OE}_n = 2.0V$
I <sub>OZL</sub>	Output Leakage Curre	ent			-10	μΑ	0 – 5.5V	$V_{OUT} = 0.5V; \overline{OE}_n = 2.0V$
Ios	Output Short-Circuit C	urrent	-100		-275	mA	Max	$V_{OUT} = 0.0V$
I <sub>CEX</sub>	Output HIGH Leakage	Current			50	μΑ	Max	$V_{OUT} = V_{CC}$
I <sub>ZZ</sub>	Bus Drainage Test				100	μΑ	0.0	V <sub>OUT</sub> = 5.5V
								All Other Pins GND
I <sub>CCH</sub>	Power Supply Current				2.0	mA	Max	All Outputs HIGH
I <sub>CCL</sub>	Power Supply Current				60	mA	Max	All Outputs LOW
I <sub>CCZ</sub>	Power Supply Current				2.0	mA	Max	$\overline{OE}_n = V_{CC}$
								All Others at V <sub>CC</sub> or GND
I <sub>CCT</sub>	Additional I <sub>CC</sub> /Input	Outputs Enabled			2.5	mA		V <sub>I</sub> = V <sub>CC</sub> - 2.1V
		Outputs 3-STATE			2.5	mA	Max	Enable Input V <sub>I</sub> = V <sub>CC</sub> - 2.1V
		Outputs 3-STATE			50	μΑ		Data Input V <sub>I</sub> = V <sub>CC</sub> - 2.1V
								All Others at V <sub>CC</sub> or GND
I <sub>CCD</sub>	Dynamic I <sub>CC</sub>	Dynamic I <sub>CC</sub> No Load				mA/ MHz	Max	Outputs Open, $\overline{OE}_n = GND$
	(Note 3)				0.1			One Bit Toggling,
								50% Duty Cycle

Note 3: Guaranteed but not tested.

#### **DC Electrical Characteristics**

0	D		T		Units	v <sub>cc</sub>	Conditions	
Symbol	Parameter	Min	Тур	Max			$C_L = 50 \text{ pF, } R_L = 500\Omega$	
V <sub>OLP</sub>	Quiet Output Maximum Dynamic V <sub>OL</sub>		0.4	0.7	V	5.0	T <sub>A</sub> = 25°C (Note 4)	
V <sub>OLV</sub>	Quiet Output Minimum Dynamic V <sub>OL</sub>	-1.3	-1.0		V	5.0	T <sub>A</sub> = 25°C (Note 4)	
V <sub>OHV</sub>	Minimum HIGH Level Dynamic Output Voltage	2.7	3.0		V	5.0	T <sub>A</sub> = 25°C (Note 5)	
V <sub>IHD</sub>	Minimum HIGH Level Dynamic Input Voltage	2.0	1.4		V	5.0	T <sub>A</sub> = 25°C (Note 6)	
V <sub>ILD</sub>	Maximum LOW Level Dynamic Input Voltage		1.2	0.8	V	5.0	T <sub>A</sub> = 25°C (Note 6)	

Note 4: Max number of outputs defined as (n). n-1 data inputs are driven 0V to 3V. One output at LOW. Guaranteed, but not tested.

Note 6: Max number of data inputs (n) switching. n-1 inputs switching 0V to 3V. Input-under-test switching: 3V to threshold (V<sub>ILD</sub>), 0V to threshold (V<sub>IHD</sub>). Guaranteed, but not tested.

#### **AC Electrical Characteristics**

Symbol	Parameter	$T_A=+25^{\circ}$ C $V_{CC}=+5V$ $C_L=50$ pF			T <sub>A</sub> = -40°C V <sub>CC</sub> = 4. C <sub>L</sub> =	Units	
		Min	Тур	Max	Min	Max	
t <sub>PLH</sub>	Propagation	1.0	2.3	3.9	1.0	3.9	ns
t <sub>PHL</sub>	Delay Data to Outputs	1.0	2.7	3.9	1.0	3.9	115
t <sub>PZH</sub>	Output Enable	1.5	3.5	6.3	1.5	6.3	ns
t <sub>PZL</sub>	Time	1.5	3.5	6.3	1.5	6.3	115
t <sub>PHZ</sub>	Output Disable	1.0	4.2	6.7	1.0	6.7	no
t <sub>PLZ</sub>	Time	1.0	3.2	6.7	1.0	6.7	ns

#### **Extended AC Electrical Characteristics**

Symbol	Parameter	-40°C to +85°C  V <sub>CC</sub> = 4.5V-5.5V  C <sub>L</sub> = 50 pF  16 Outputs Switching  (Note 7)		$T_{A} = -40^{\circ}\text{C to } +85^{\circ}\text{C}$ $V_{CC} = 4.5\text{V} -5.5\text{V}$ $C_{L} = 250 \text{ pF}$ 1 Output Switching (Note 8)		$T_{A} = -40^{\circ}\text{C to } +85^{\circ}\text{C}$ $V_{CC} = 4.5\text{V-}5.5\text{V}$ $C_{L} = 250 \text{ pF}$ 16 Outputs Switching (Note 9)		Units	
		Min	Тур	Max	Min	Max	Min	Max	
f <sub>TOGGLE</sub>	Max Toggle Frequency		100						MHz
t <sub>PLH</sub>	Propagation Delay	1.5		5.0	1.5	6.0	2.5	8.0	ns
$t_{PHL}$	Data to Outputs	1.5		5.3	1.5	6.0	2.5	8.0	115
t <sub>PZH</sub>	Output Enable Time	1.5		6.5	2.5	7.8	2.5	9.5	ns
$t_{PZL}$		1.5		6.5	2.5	7.8	2.5	8.5	115
t <sub>PHZ</sub>	Output Disable Time	1.0		6.7	/Not	e 10)	/Not	e 10)	no
$t_{PLZ}$		1.0		6.7	(1401)	e 10)	(INOL	e 10)	ns

Note 7: This specification is guaranteed but not tested. The limits apply to propagation delays for all paths described switching in phase (i.e., all LOW-to-HIGH, HIGH-to-LOW, etc.).

Note 8: This specification is guaranteed but not tested. The limits represent propagation delay with 250 pF load capacitors in place of the 50 pF load capacitors in the standard AC load. This specification pertains to single output switching only.

Note 9: This specification is guaranteed but not tested. The limits represent propagation delays for all paths described switching in phase (i.e., all LOW-to-HIGH, HIGH-to-LOW, etc.) with 250 pF load capacitors in place of the 50 pF load capacitors in the standard AC load.

Note 10: The 3-STATE delay times are dominated by the RC network (500\Omega, 250 pF) on the output and have been excluded from the datasheet.

Note 5: Max number of outputs defined as (n). n - 1 data inputs are driven 0V to 3V. One output HIGH. Guaranteed, but not tested.

#### Skew

Symbol	Parameter	T <sub>A</sub> = -40°C to +85°C  V <sub>CC</sub> = 4.5V-5.5V  C <sub>L</sub> = 50 pF  16 Outputs Switching  (Note 11)  Max	T <sub>A</sub> = -40°C to +85°C  V <sub>CC</sub> = 4.5V-5.5V  C <sub>L</sub> = 250 pF  16 Outputs Switching  (Note 12)  Max	Units
t <sub>OSHL</sub> (Note 13)	Pin to Pin Skew HL Transitions	1.0	1.5	ns
t <sub>OSLH</sub> (Note 13)	Pin to Pin Skew LH Transitions	1.0	1.5	ns
t <sub>PS</sub> (Note 14)	Duty Cycle LH–HL Skew	1.5	1.5	ns
t <sub>OST</sub> (Note 13)	Pin to Pin Skew LH/HL Transitions	1.7	2.0	ns
t <sub>PV</sub> (Note 15)	Device to Device Skew LH/HL Transitions	2.0	2.5	ns

Note 11: This specification is guaranteed but not tested. The limits apply to propagation delays for all paths described switching in phase (i.e., all LOW-to-HIGH, HIGH-to-LOW, etc.)

Note 12: These specifications guaranteed but not tested. The limits represent propagation delays with 250 pF load capacitors in place of the 50 pF load capacitors in the standard AC load.

Note 13: Skew is defined as the absolute value of the difference between the actual propagation delays for any two separate outputs of the same device. The specification applies to any outputs switching HIGH to LOW (toSHL), LOW-to-HIGH (toSLH), or any combination switching LOW-to-HIGH and/or HIGH-to-LOW (toST). The specification is guaranteed but not tested.

Note 14: This describes the difference between the delay of the LOW-to-HIGH and the HIGH-to-LOW transition on the same pin. It is measured across all the outputs (drivers) on the same chip, the worst (largest delta) number is the guaranteed specification. This specification is guaranteed but not tested.

Note 15: Propagation delay variation for a given set of conditions (i.e., temperature and V<sub>CC</sub>) from device to device. This specification is guaranteed but not tested

#### Capacitance

Symbol	Parameter	Тур	Units	Conditions T <sub>A</sub> = 25°C
C <sub>IN</sub>	Input Capacitance	5.0	pF	V <sub>CC</sub> = 5.0V
C <sub>OUT</sub> (Note 16)	Output Capacitance	9.0	pF	V <sub>CC</sub> = 5.0V

Note 16: C<sub>OUT</sub> is measured at frequency f = 1 MHz; per MIL STD-883, Method 3012.

#### **AC** Loading OPEN NEGATIVE PULSE $t_{PZL}$ , $t_{PLZ}$ ALL OTHER 500Ω D.U.T. POSITIVE PULSE 500Ω 10% $V_{M} = 1.5V$ \*Includes jig and probe capacitance FIGURE 2. Test Input Pulse Requirements FIGURE 1. Standard AC Test Load Amplitude Rep Rate t<sub>W</sub> t<sub>f</sub> 3.0V 1 MHz 500 ns 2.5 ns 2.5 ns FIGURE 3. Test Input Signal Requirements **AC Waveforms** OUTPUT CONTROL Vm = 1.5V Vm = 1.5V <sup>t</sup>PLH DATA OUT DATA ₽ZL OUT <sup>t</sup>PLZ DATA OUT 0.37 FIGURE 4. Propagation Delay Waveforms FIGURE 6. 3-STATE Output HIGH for Inverting and Non-Inverting Functions and LOW Enable and Disable Times Vm = 1.5V CLOCK OR Vm = 1.5V CONTROL DATA INPUT <sup>t</sup>h(L) $t_{s(L)}$ Vm = 1.5V t<sub>h(H)</sub> t<sub>s(H)</sub> CLOCK OR CONTROL Vm = 1.5V DATA INPUT OUT MR, CLR

FIGURE 5. Propagation Delay,


Pulse Width Waveforms

PRE

Vm = 1.5V

FIGURE 7. Setup Time, Hold Time

and Recovery Time Waveforms

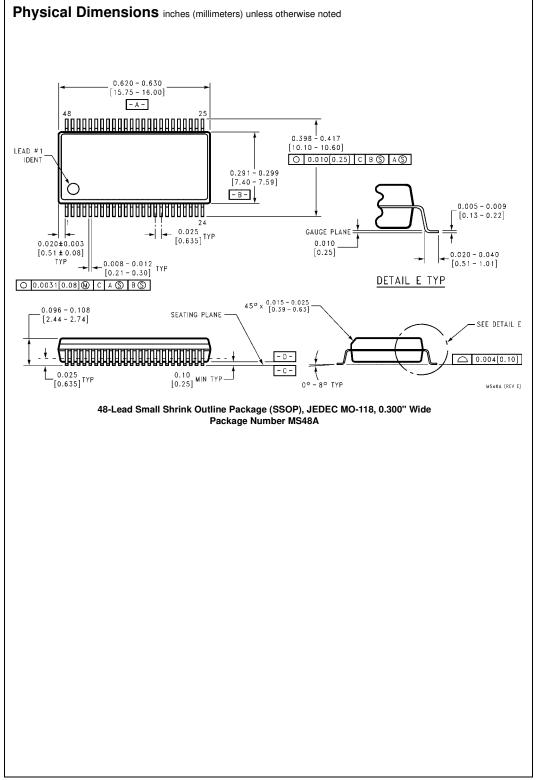

#### Physical Dimensions inches (millimeters) unless otherwise noted (Continued) 12.50±0.10 0.40 TYP -B-10±0,10 89 9.20 B.10 50. O.2 C B A ALL LEAD TIPS PIN #1 IDENT LAND PATTERN RECOMMENDATION O.1 C ALL LEAD TIPS SEE DETAIL A 0.90+0.15 0.09-0.20 0.10±0.05 0.50 0.17-0.27 ♦ 0.13\( \old{\text{0}} \) A B\( \old{\text{S}} \) C\( \old{\text{S}} \) 12.00' TOP & BOTTOM DIMENSIONS ARE IN MILLIMETERS GAGE PLANE 0.25 NOTES A. CONFORMS TO JEDEC REGISTRATION MO-153, VARIATION ED, DATE 4/97. B. DIMENSIONS ARE IN MILLIMETERS. SEATING PLANE 0.60±0.10 C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS. D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982. DETAIL A MTD48REVC

48-Lead Thin Shrink Small Outline Package (TSSOP), JEDEC MO-153, 6.1mm Wide Package Number MTD48

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

#### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

- Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
- A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com