

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



# Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









#### Important notice

Dear Customer,

On 7 February 2017 the former NXP Standard Product business became a new company with the tradename **Nexperia**. Nexperia is an industry leading supplier of Discrete, Logic and PowerMOS semiconductors with its focus on the automotive, industrial, computing, consumer and wearable application markets

In data sheets and application notes which still contain NXP or Philips Semiconductors references, use the references to Nexperia, as shown below.

Instead of <a href="http://www.nxp.com">http://www.nxp.com</a>, <a href="http://www.semiconductors.philips.com/">http://www.nxp.com</a>, <a href="http://www.nexperia.com">http://www.nexperia.com</a>, <a href="http://www.nexperia.com">http://www.nexperia.com</a>)

Instead of sales.addresses@www.nxp.com or sales.addresses@www.semiconductors.philips.com, use salesaddresses@nexperia.com (email)

Replace the copyright notice at the bottom of each page or elsewhere in the document, depending on the version, as shown below:

- © NXP N.V. (year). All rights reserved or © Koninklijke Philips Electronics N.V. (year). All rights reserved

Should be replaced with:

- © Nexperia B.V. (year). All rights reserved.

If you have any questions related to the data sheet, please contact our nearest sales office via e-mail or telephone (details via **salesaddresses@nexperia.com**). Thank you for your cooperation and understanding,

Kind regards,

Team Nexperia

### INTEGRATED CIRCUITS

# DATA SHEET

# 74LVT16373A

3.3V LVT 16-bit transparent D-type latch (3-State)

Product specification
Supersedes data of 1994 Dec 15
IC23 Data Handbook





## 3.3V 16-bit transparent D-type latch (3-State)

#### 74LVT16373A

#### **FEATURES**

- 16-bit transparent latch
- 3-State buffers
- Output capability: +64mA/-32mA
- TTL input and output switching levels
- Input and output interface capability to systems at 5V supply
- Bus-hold data inputs eliminate the need for external pull-up resistors to hold unused inputs
- Live insertion/extraction permitted
- Power-up reset
- Power-up 3-State
- No bus current loading when output is tied to 5V bus
- Latch-up protection exceeds 500mA per JEDEC Std 17
- ESD protection exceeds 2000V per MIL STD 883 Method 3015 and 200V per Machine Model

#### **DESCRIPTION**

The 74LVT16373A is a high-performance BiCMOS product designed for  $V_{CC}$  operation at 3.3V.

This device is a 16-bit transparent D-type latch with non-inverting 3-State bus compatible outputs. The device can be used as two 8-bit latches or one 16-bit latch. When enable (E) input is High, the Q outputs follow the data (D) inputs. When enable is taken Low, the Q outputs are latched at the levels of the D inputs one setup time prior to the High-to-Low transition.


#### **QUICK REFERENCE DATA**

SYMBOL	PARAMETER	CONDITIONS T <sub>amb</sub> = 25°C	TYPICAL	UNIT
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay nDx to nQx	$C_L = 50pF;$ $V_{CC} = 3.3V$	1.9	ns
C <sub>IN</sub>	Input capacitance	V <sub>I</sub> = 0V or 3.0V	3	pF
C <sub>OUT</sub>	Output capacitance	Outputs disabled; V <sub>O</sub> = 0V or 3.0V	9	pF
I <sub>CCZ</sub>	Total supply current	Outputs disabled; V <sub>CC</sub> = 3.6V	70	μΑ

#### **ORDERING INFORMATION**

PACKAGES	TEMPERATURE RANGE	OUTSIDE NORTH AMERICA	NORTH AMERICA	DWG NUMBER
48-Pin Plastic SSOP Type III	–40°C to +85°C	74LVT16373A DL	VT16373A DL	SOT370-1
48-Pin Plastic TSSOP Type II	-40°C to +85°C	74LVT16373A DGG	VT16373A DGG	SOT362-1

#### LOGIC SYMBOL




#### **PIN DESCRIPTION**

PIN NUMBER	SYMBOL	FUNCTION
47, 46, 44, 43, 41, 40, 38, 37, 36, 35, 33, 32, 30, 29, 27, 26	1D0 – 1D7 2D0 – 2D7	Data inputs
2, 3, 5, 6, 8, 9, 11, 12, 13, 14, 16, 17, 19, 20, 22, 23	1Q0 – 1Q7 2Q0 – 2Q7	Data outputs
1, 24	1 <u>OE</u> , 2 <u>OE</u>	Output enable inputs (active-Low)
48, 25	1E, 2E	Enable inputs (active-High)
4, 10, 15, 21, 28, 34, 39, 45	GND	Ground (0V)
7, 18, 31, 42	V <sub>CC</sub>	Positive supply voltage


## 3.3V 16-bit transparent D-type latch (3-State)

## 74LVT16373A


#### LOGIC SYMBOL (IEEE/IEC)

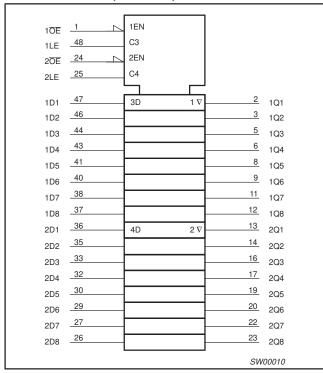

#### **PIN CONFIGURATION**

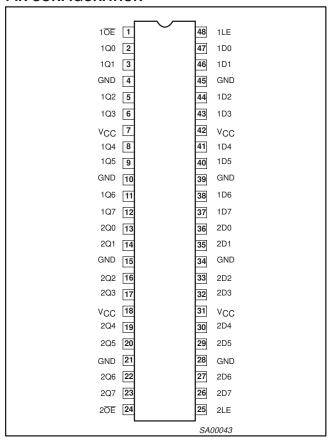

#### **LOGIC DIAGRAM**

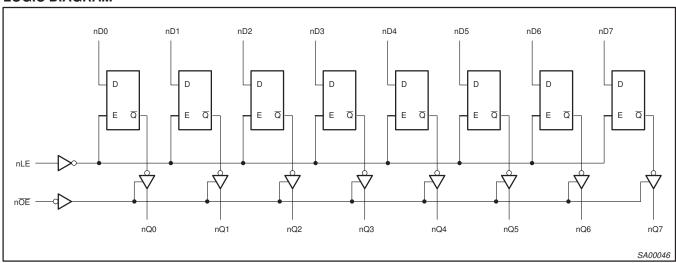

## 3.3V 16-bit transparent D-type latch (3-State)

74LVT16373A

#### **FUNCTION TABLE**

	INPUTS	INTERNAL OUTPUTS		OUTPUTS	OPERATING MODE			
nŌĒ	nE	nDx	REGISTER	nQ0 – nQ7	OPERATING MODE			
L L	H H	L H	L H	L H	Enable and read register			
L L	↓ ↓	l h	L H	L H	Latch and read register			
L	L	Х	NC	NC	Hold			
H H	L H	X nDx	NC nDx	Z Z	Disable outputs			

H = High voltage level

h = High voltage level one set-up time prior to the High-to-Low E transition

L = Low voltage level

I = Low voltage level one set-up time prior to the High-to-Low E transition

NC= No change

X = Don't care

Z = High impedance "off" state

 $\downarrow$  = High-to-Low E transition

### ABSOLUTE MAXIMUM RATINGS<sup>1, 2</sup>

SYMBOL	PARAMETER	CONDITIONS	RATING	UNIT	
V <sub>CC</sub>	DC supply voltage		-0.5 to +4.6	V	
I <sub>IK</sub>	DC input diode current	V <sub>1</sub> < 0	-50	mA	
V <sub>I</sub>	DC input voltage <sup>3</sup>		-0.5 to +7.0	V	
I <sub>OK</sub>	DC output diode current V <sub>O</sub> < 0		-50	mA	
V <sub>OUT</sub>	DC output voltage <sup>3</sup>	Output in Off or High state	-0.5 to +7.0	V	
	DC output ourrent	Output in Low state	128	A	
IOUT	DC output current	Output in High state	-64	· mA	
T <sub>stg</sub>	Storage temperature range		-65 to +150	°C	

#### NOTES:

- 1. Stresses beyond those listed may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- 2. The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability. The maximum junction temperature of this integrated circuit should not exceed 150°C.
- 3. The input and output negative voltage ratings may be exceeded if the input and output clamp current ratings are observed.

#### RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	LIM	UNIT	
STINIBUL	FARAMETER	MIN	MAX	UNIT
V <sub>CC</sub>	DC supply voltage	2.7	3.6	V
V <sub>I</sub>	Input voltage	0	5.5	V
V <sub>IH</sub>	High-level input voltage	2.0		V
$V_{IL}$	Input voltage		0.8	V
I <sub>OH</sub>	High-level output current		-32	mA
I <sub>OL</sub>	Low-level output current		32	mA
	Low-level output current; current duty cycle ≤ 50%; f ≥ 1kHz		64	
Δt/Δν	Input transition rise or fall rate; Outputs enabled		10	ns/V
T <sub>amb</sub>	Operating free-air temperature range	-40	+85	°C

## 3.3V 16-bit transparent D-type latch (3-State)

74LVT16373A

#### DC ELECTRICAL CHARACTERISTICS

SYMBOL	PARAMETER	TEST CONDITIONS		Temp =	-40°C to	+85°C	UNIT	
		MIN	TYP <sup>1</sup>	MAX	1			
V <sub>IK</sub>	Input clamp voltage	$V_{CC} = 2.7V; I_{IK} = -18mA$			85	-1.2	V	
		$V_{CC} = 2.7 \text{ to } 3.6 \text{V}; I_{OH} = -100 \mu\text{A}$		V <sub>CC</sub> -0.2	V <sub>CC</sub>			
V <sub>OH</sub>	High-level output voltage	$V_{CC} = 2.7V; I_{OH} = -8mA$		2.4	2.5		V	
		$V_{CC} = 3.0V; I_{OH} = -32mA$	2.0	2.3		1		
		$V_{CC} = 2.7V; I_{OL} = 100\mu A$			0.07	0.2		
		V <sub>CC</sub> = 2.7V; I <sub>OL</sub> = 24mA			0.3	0.5	1	
$V_{OL}$	Low-level output voltage	V <sub>CC</sub> = 3.0V; I <sub>OL</sub> = 16mA			0.25	0.4	V	
		$V_{CC} = 3.0V; I_{OL} = 32mA$			0.3	0.5	1	
				0.4	0.55	1		
V <sub>RST</sub>	Power-up output Low voltage <sup>5</sup>	$V_{CC} = 3.6V$ ; $I_O = 1mA$ ; $V_I = GND$ or $V_{CC}$	$V_{CC} = 3.0V; I_{OL} = 64mA$ $V_{CC} = 3.6V; I_{O} = 1mA; V_{I} = GND \text{ or } V_{CC}$				V	
		$V_{CC} = 3.6V$ ; $V_I = V_{CC}$ or GND	Control pins		0.1	±1		
1.	Input leakage current	V <sub>CC</sub> = 0 or 3.6V; V <sub>I</sub> = 5.5V			0.4	10	μΑ	
łı	Input leakage current	$V_{CC} = 3.6V; V_{I} = V_{CC}$	Data pins <sup>4</sup>		0.1	1		
		$V_{CC} = 3.6V; V_I = 0$	Data pins		-0.4	-5		
I <sub>OFF</sub>	Output off current	$V_{CC} = 0V$ ; $V_{I}$ or $V_{O} = 0$ to 4.5V			0.1	±100	μΑ	
		$V_{CC} = 3V; V_I = 0.8V$	75	135		μА		
I <sub>HOLD</sub>	Bus Hold current D inputs <sup>7</sup>	$V_{CC} = 3V; V_I = 2.0V$	<del>-</del> 75	-135				
		$V_{CC} = 0V \text{ to } 3.6V; V_{CC} = 3.6V$	±500					
I <sub>EX</sub>	Current into an output in the High state when V <sub>O</sub> > V <sub>CC</sub>	$V_O = 5.5V; V_{CC} = 3.0V$			50	125	μΑ	
I <sub>PU/PD</sub>	Power up/down 3-State output current <sup>3</sup>	$V_{CC} \le 1.2V$ ; $V_O = 0.5V$ to $V_{CC}$ ; $V_I = GNE$ $OE/\overline{OE} = Don't$ care	or V <sub>CC</sub> ;		1	±100	μА	
l <sub>OZH</sub>	3-State output High current	$V_{CC} = 3.6V; V_{O} = 3.0V; V_{I} = V_{IH} \text{ or } V_{IL}$			0.5	5	μА	
I <sub>OZL</sub>	3-State output Low current	$V_{CC} = 3.6V; V_{O} = 0.5V; V_{I} = V_{IH} \text{ or } V_{IL}$		0.5	-5	μΑ		
I <sub>CCH</sub>		$V_{CC} = 3.6V$ ; Outputs High, $V_I = GND$ or		0.07	0.12	mA		
I <sub>CCL</sub>	Quiescent supply current	$V_{CC} = 3.6V$ ; Outputs Low, $V_I = GND$ or $V_I = GND$		4.0	6			
I <sub>CCZ</sub>		$V_{CC} = 3.6V$ ; Outputs Disabled; $V_I = GNE$	or $V_{CC, I_{O}} = 0^6$		0.07	0.12		
Δl <sub>CC</sub>	Additional supply current per input pin <sup>2</sup>	$V_{CC}$ = 3V to 3.6V; One input at $V_{CC}$ -0.6V Other inputs at $V_{CC}$ or GND	/,		0.1	0.2	mA	

- All typical values are at V<sub>CC</sub> = 3.3V and T<sub>amb</sub> = 25°C.
   This is the increase in supply current for each input at the specified voltage level other than V<sub>CC</sub> or GND.
   This parameter is valid for any V<sub>CC</sub> between 0V and 1.2V with a transition time of up to 10msec. From V<sub>CC</sub> = 1.2V to V<sub>CC</sub> = 3.3V ± 0.3V a transition time of 100µsec is permitted. This parameter is valid for T<sub>amb</sub> = 25°C only.
   Unused pins at V<sub>CC</sub> or GND.
   For valid test results, data must not be loaded into the flip-flops (or latches) after applying power.

- 6. I<sub>CCZ</sub> is measured with outputs pulled to V<sub>CC</sub> or GND.
  7. This is the bus hold overdrive current required to force the input to the opposite logic state.

## 3.3V 16-bit transparent D-type latch (3-State)

### 74LVT16373A

#### **AC CHARACTERISTICS**

 $GND = 0V; \ t_R = t_F = 2.5 ns; \ C_L = 50 pF; \ R_L = 500 \Omega; \ T_{amb} = -40 ^{\circ}C \ to \ +85 ^{\circ}C.$ 

SYMBOL	PARAMETER	WAVEFORM	V <sub>C</sub>	<sub>C</sub> = 3.3V ±0.	V <sub>CC</sub> = 2.7V	UNIT	
			MIN	TYP <sup>1</sup>	MAX	MAX	
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay nDx to nQx	2	0.5 0.5	1.8 1.9	3.9 3.9	4.5 4.5	ns
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay nE to nQx	1	0.5 0.5	2.1 2.2	4.8 4.8	5.4 5.4	ns
t <sub>PZH</sub> t <sub>PZL</sub>	Output enable time to High and Low level	4 5	0.1 0.1	2.8 2.6	4.5 4.3	5.1 4.7	ns
t <sub>PHZ</sub> t <sub>PLZ</sub>	Output disable time from High and Low Level	4 5	0.1 0.1	3.3 3.0	4.5 4.3	5.1 4.7	ns

#### NOTE:


#### **AC SETUP REQUIREMENTS**

 $GND = 0V; t_R = t_F = 2.5 ns; \ C_L = 50 pF; \ R_L = 500 \Omega; \ T_{amb} = -40 ^{\circ}C \ to \ +85 ^{\circ}C.$ 


SYMBOL	PARAMETER	WAVEFORM	V <sub>CC</sub> = 3.3	3V ±0.3V	$V_{CC} = 2.7V$	UNIT
			MIN	TYP	MIN	
t <sub>S</sub> (H) t <sub>S</sub> (L)	Setup time nDx to nE	3	1.5 2.0	0.1 0.2	1.0 2.0	ns
t <sub>h</sub> (H) t <sub>h</sub> (L)	Hold time nDx to nE	3	1.0 1.5	0	1.0 2.0	ns
t <sub>W</sub> (H)	nE pulse width High	1	1.5	0.5	1.5	ns

#### **AC WAVEFORMS**


For all waveforms,  $V_M = 1.5V$ .




Waveform 1. Propagation Delay, Enable to Output, and Enable Pulse Width



Waveform 2. Propagation Delay for Data to Outputs



Waveform 3. Data Setup and Hold Times




Waveform 4. 3-State Output Enable time to High Level and Output Disable Time from High Level

1998 Feb 19 6

<sup>1.</sup> All typical values are at  $V_{CC} = 3.3V$  and  $T_{amb} = 25$ °C.


## 3.3V 16-bit transparent D-type latch (3-State)

74LVT16373A



Waveform 5. 3-State Output Enable Time to Low Level and Output Disable Time from Low Level

#### **TEST CIRCUIT AND WAVEFORMS**

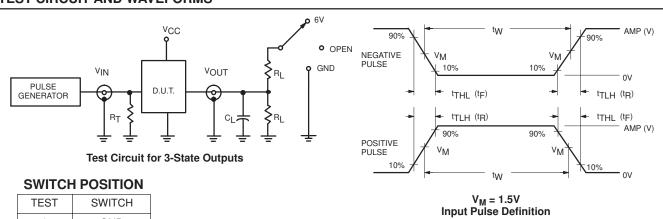

TEST	SWITCH
t <sub>PHZ</sub> /t <sub>PZH</sub>	GND
t <sub>PLZ</sub> /t <sub>PZL</sub>	6V
t <sub>PLH</sub> /t <sub>PHL</sub>	open

#### **DEFINITIONS**

R<sub>L</sub> = Load resistor; see AC CHARACTERISTICS for value.

 $C_L = Load$  capacitance includes jig and probe capacitance; see AC CHARACTERISTICS for value.

 $R_T$  = Termination resistance should be equal to  $Z_{OUT}$  of pulse generators.

FAMILY	INPUT PULSE REQUIREMENTS								
	Amplitude	Rep. Rate	t <sub>W</sub>	t <sub>R</sub>	t <sub>F</sub>				
74LVT16	2.7V	≤10MHz	500ns	≤2.5ns	≤2.5ns				

SW00003


1998 Feb 19 7

## 3.3V LVT 16-bit transparent D-type latch (3-State)

74LVT16373A

SSOP48: plastic shrink small outline package; 48 leads; body width 7.5 mm

SOT370-1

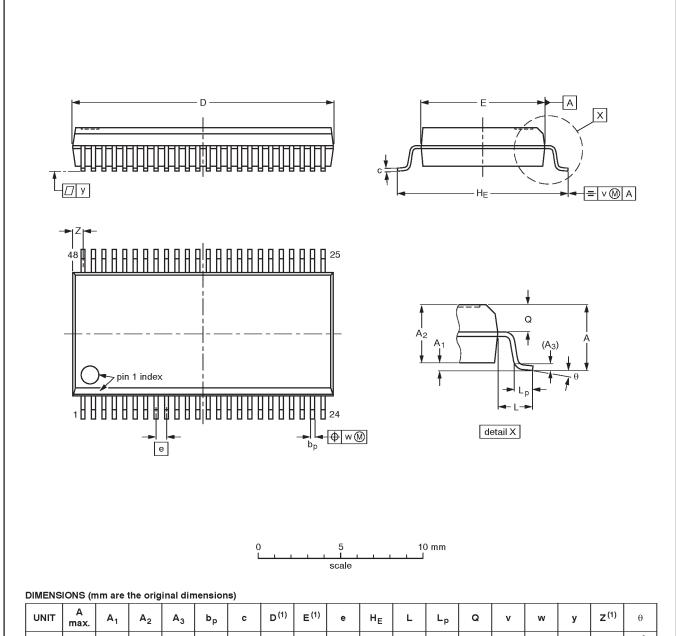

UNIT	A max.	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	bр	С	D <sup>(1)</sup>	E <sup>(1)</sup>	е	HE	L	Lp	Q	v	w	у	Z <sup>(1)</sup>	θ
mm	2.8	0.4 0.2	2.35 2.20	0.25	0.3 0.2	0.22 0.13	16.00 15.75	7.6 7.4	0.635	10.4 10.1	1.4	1.0 0.6	1.2 1.0	0.25	0.18	0.1	0.85 0.40	8° 0°

#### Note

1. Plastic or metal protrusions of 0.25 mm maximum per side are not included.


OUTLINE		REFER	RENCES	EUROPEAN	ISSUE DATE
VERSION	IEC	JEDEC	EIAJ	PROJECTION	ISSUE DATE
SOT370-1		MO-118AA			<del>93-11-02</del> 95-02-04

# 3.3V LVT 16-bit transparent D-type latch (3-State)

74LVT16373A

TSSOP48: plastic thin shrink small outline package; 48 leads; body width 6.1mm

SOT362-1

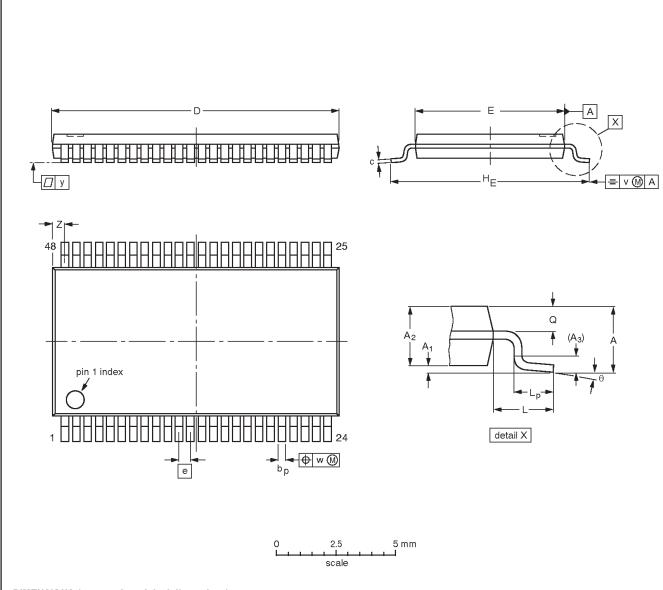

#### DIMENSIONS (mm are the original dimensions).

UNIT	A max.	Α1	A <sub>2</sub>	А3	bp	c	D <sup>(1)</sup>	E <sup>(2)</sup>	e	HE	L	Lp	œ	v	w	у	Z	θ
mm	1.2	0.15 0.05	1.05 0.85	0.25	0.28 0.17	0.2 0.1	12.6 12.4	6.2 6.0	0.5	8.3 7.9	1	0.8 0.4	0.50 0.35	0.25	0.08	0.1	0.8 0.4	8° 0°

#### Notes

- 1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
- 2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

OUTLINE		REFER	EUROPEAN	ISSUE DATE			
VERSION	IEC	JEDEC	EIAJ		PROJECTION	ISSUE DATE	
SOT362-1		MO-153ED				<del>-93-02-03</del> 95-02-10	

# 3.3V LVT 16-bit transparent D-type latch (3-State)

74LVT16373A

#### Data sheet status

Data sheet status	Product status	Definition [1]
Objective specification	Development	This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice.
Preliminary specification	Qualification	This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make chages at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

<sup>[1]</sup> Please consult the most recently issued datasheet before initiating or completing a design.

#### **Definitions**

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

**Limiting values definition** — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

#### **Disclaimers**

**Life support** — These products are not designed for use in life support appliances, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

**Right to make changes** — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors 811 East Arques Avenue P.O. Box 3409 Sunnyvale, California 94088–3409 Telephone 800-234-7381 © Copyright Philips Electronics North America Corporation 1998 All rights reserved. Printed in U.S.A.

print code Date of release: 05-96

Document order number: 9397-750-03554

Let's make things better.

Philips Semiconductors



